


室内灯具光度数据


实测参数: U:220.2V I:0.0948A P:11.91W PF:0.5705 实检光通:607.359x1 lm		
灯具名称:MQT-LED0210C(H)	灯具类型:LED 3000K	灯具重量:N/A
灯具规格:MQT-LED0210C(H)	外型尺寸: 83*110mm	测试编号:19
制造厂商: C1	发光口面:0.055	遮光角:N/A

光源数据		光度数据				光效: 50.98 lm/W
型号	cree 1507	峰值光强(cd)	2102	S/MH(C0/180)	0.50	
标称功率(W)	11.9126	灯具效率(%)	100.0	S/MH(C90/270)	0.46	
额定电源电压(V)	220	总光通量(lm)	607.36	η UP, DN(C0-180)	0.2, 49.8	
额定光通量(lm)	607.359	CIE分类	直接	η UP, DN(C180-360)	0.2, 49.8	
灯具内光源数(只)	1	上射光通比(%)	0.4	CIBSE SHR NOM	0.50	
实测电源电压(V)	220.1	下射光通比(%)	99.6	CIBSE SHR MAX	0.50	

室内灯具配光曲线

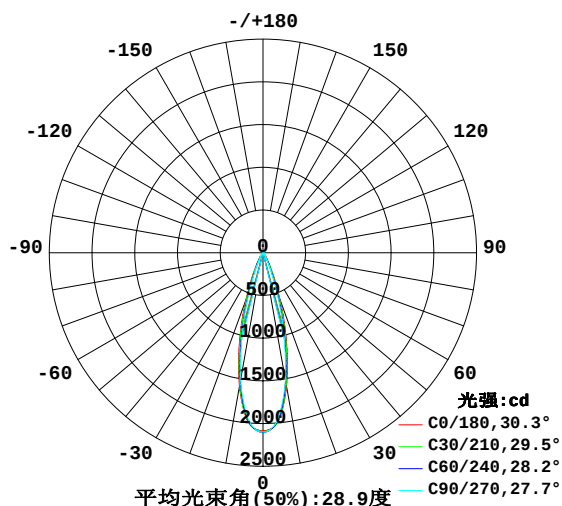

空间等照度曲线(单位:lx)

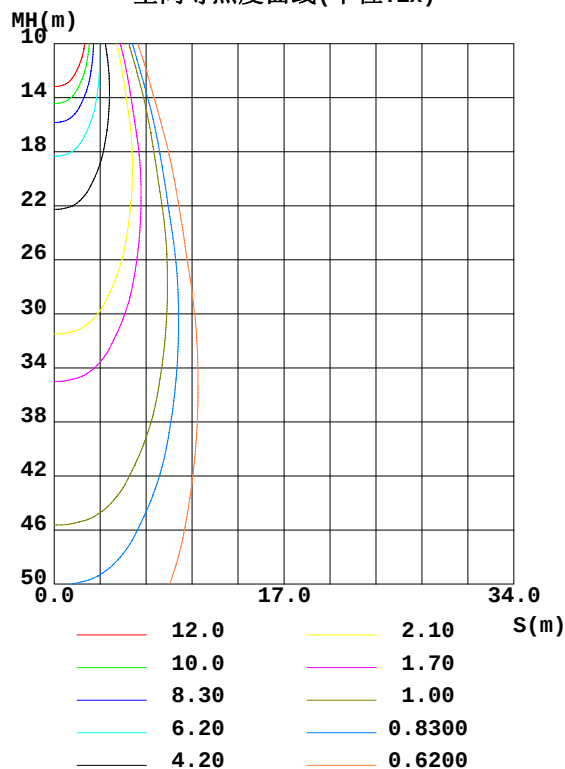

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-16

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
5	1988	1979	1963	1979	1988	1979	1963	1979	0- 5	48.77	48.77	8.03, 8.03
10	1589	1543	1511	1543	1589	1543	1511	1543	5- 10	125.8	174.5	28.7, 28.7
15	1059	987.7	918.8	987.7	1059	987.7	918.8	987.7	10- 15	148.1	322.6	53.1, 53.1
20	577.0	514.0	448.5	514.0	577.0	514.0	448.5	514.0	15- 20	120.4	443.0	72.9, 72.9
25	277.4	226.7	184.7	226.7	277.4	226.7	184.7	226.7	20- 25	73.23	516.2	85.85
30	128.9	104.6	81.11	104.6	128.9	104.6	81.11	104.6	25- 30	39.15	555.4	91.4, 91.4
35	58.79	50.27	43.27	50.27	58.79	50.27	43.27	50.27	30- 35	21.82	577.2	95.95
40	25.05	25.28	24.95	25.28	25.05	25.28	24.95	25.28	35- 40	11.92	589.1	97.97
45	16.20	15.52	15.03	15.52	16.20	15.52	15.03	15.52	40- 45	7.328	596.4	98.2, 98.2
50	8.859	8.207	7.819	8.207	8.859	8.207	7.819	8.207	45- 50	4.759	601.2	99.99
55	3.265	3.196	3.231	3.196	3.265	3.196	3.231	3.196	50- 55	2.340	603.5	99.4, 99.4
60	1.007	0.9914	1.012	0.9914	1.007	0.9914	1.012	0.9914	55- 60	0.9235	604.4	99.5, 99.5
65	0	0.0619	0.0892	0.0619	0	0.0619	0.0892	0.0619	60- 65	0.2018	604.6	99.6, 99.6
70	0	0	0	0	0	0	0	0	65- 70	0.0032	604.7	99.6, 99.6
75	0	0	0	0	0	0	0	0	70- 75	0	604.7	99.6, 99.6
80	0	0	0	0	0	0	0	0	75- 80	0	604.7	99.6, 99.6
85	0	0	0	0	0	0	0	0	80- 85	0	604.7	99.6, 99.6
90	0	0	0	0	0	0	0	0	85- 90	0	604.7	99.6, 99.6
95	0	0	0	0	0	0	0	0	90- 95	0	604.7	99.6, 99.6
100	0	0	0	0	0	0	0	0	95-100	0	604.7	99.6, 99.6
105	0	0	0	0	0	0	0	0	100-105	0	604.7	99.6, 99.6
110	0	0	0	0	0	0	0	0	105-110	0	604.7	99.6, 99.6
115	0	0	0	0	0	0	0	0	110-115	0	604.7	99.6, 99.6
120	0	0	0	0	0	0	0	0	115-120	0	604.7	99.6, 99.6
125	0	0.0007	0	0.0007	0	0.0007	0	0.0007	120-125	0.0000	604.7	99.6, 99.6
130	0.0396	0.0344	0.0001	0.0344	0.0396	0.0344	0.0001	0.0344	125-130	0.0042	604.7	99.6, 99.6
135	0.1799	0.1364	0.0952	0.1364	0.1799	0.1364	0.0952	0.1364	130-135	0.0299	604.7	99.6, 99.6
140	0.4679	0.3916	0.3411	0.3916	0.4679	0.3916	0.3411	0.3916	135-140	0.0938	604.8	99.6, 99.6
145	0.9174	0.8201	0.7643	0.8201	0.9174	0.8201	0.7643	0.8201	140-145	0.1984	605.0	99.6, 99.6
150	1.484	1.405	1.352	1.405	1.484	1.405	1.352	1.405	145-150	0.3244	605.3	99.7, 99.7
155	2.087	2.056	2.037	2.056	2.087	2.056	2.037	2.056	150-155	0.4368	605.7	99.7, 99.7
160	2.606	2.634	2.675	2.634	2.606	2.634	2.675	2.634	155-160	0.4930	606.2	99.8, 99.8
165	2.931	2.987	3.074	2.987	2.931	2.987	3.074	2.987	160-165	0.4662	606.7	99.9, 99.9
170	3.085	3.085	3.140	3.085	3.085	3.085	3.140	3.085	165-170	0.3629	607.1	100, 100
175	3.095	3.111	3.090	3.111	3.095	3.111	3.090	3.111	170-175	0.2217	607.3	100, 100
180	3.161	3.143	3.151	3.143	3.161	3.143	3.151	3.143	175-180	0.0746	607.4	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 596.42 lm

%lum = 98.2%

%lamp = 98.2%

锥面光通量(120度): 604.45 lm

%lum = 99.5%


%lamp = 99.5%

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2018-04-16

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具亮度限制曲线

实测参数: U:220.2V I:0.0948A P:11.91W PF:0.5705 实检光通:607.359x1 lm		
灯具名称:MQT-LED0210C(H)	灯具类型:LED 3000K	灯具重量:N/A
灯具规格:MQT-LED0210C(H)	外型尺寸: 83*110mm	测试编号:19
制造厂商: C1	发光口面:0.055	遮光角:N/A

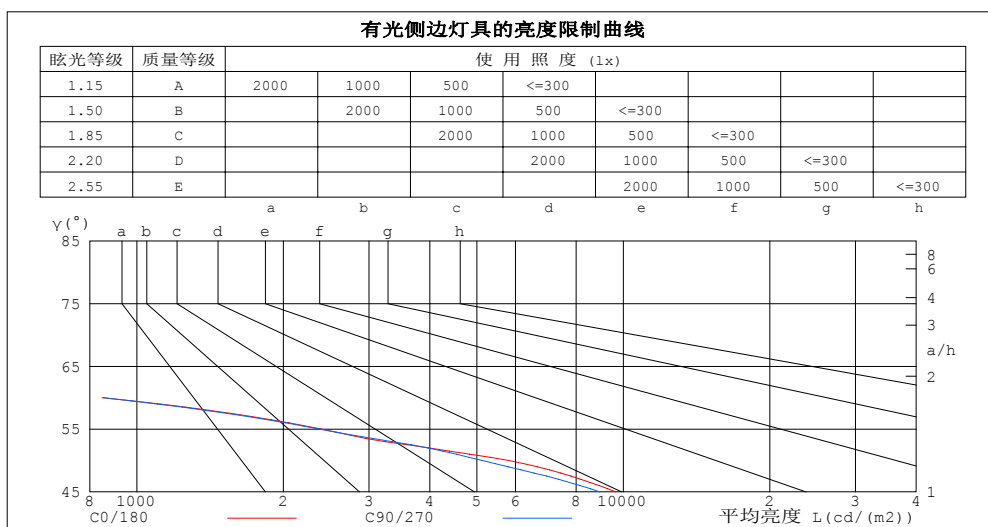

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	0	0
65	0	89
60	848	852
55	2398	2373
50	5804	5123
45	9649	8953


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:weijie
测试日期:2018-04-16

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度:65.0%
测试距离:9.490米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:220.2V I:0.0948A P:11.91W PF:0.5705 实检光通:607.359x1 lm		
灯具名称:MQT-LED0210C(H)	灯具类型:LED 3000K	灯具重量:N/A
灯具规格:MQT-LED0210C(H)	外型尺寸: 83*110mm	测试编号:19
制造厂商: C1	发光口面:0.055	遮光角:N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.09	1.10	1.08	1.07	1.06	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96
2.0	1.07	1.03	1.01	1.05	1.02	.00	1.02	.99	.97	.99	.97	.95	.96	.95	.93	.92
3.0	1.02	.98	.95	1.00	.97	.94	.98	.95	.92	.95	.93	.91	.93	.91	.90	.88
4.0	.97	.93	.90	.96	.92	.89	.94	.91	.88	.92	.89	.87	.90	.88	.86	.85
5.0	.93	.89	.85	.92	.88	.85	.91	.87	.84	.89	.86	.84	.88	.85	.83	.82
6.0	.89	.85	.82	.89	.85	.81	.87	.84	.81	.86	.83	.80	.85	.82	.80	.79
7.0	.86	.82	.78	.86	.81	.78	.84	.81	.78	.83	.80	.77	.82	.79	.77	.76
8.0	.83	.79	.76	.83	.78	.75	.82	.78	.75	.81	.77	.75	.80	.77	.74	.73
9.0	.80	.76	.73	.80	.76	.73	.79	.75	.73	.78	.75	.72	.77	.74	.72	.71
10.0	.78	.73	.70	.77	.73	.70	.77	.73	.70	.76	.72	.70	.75	.72	.70	.69

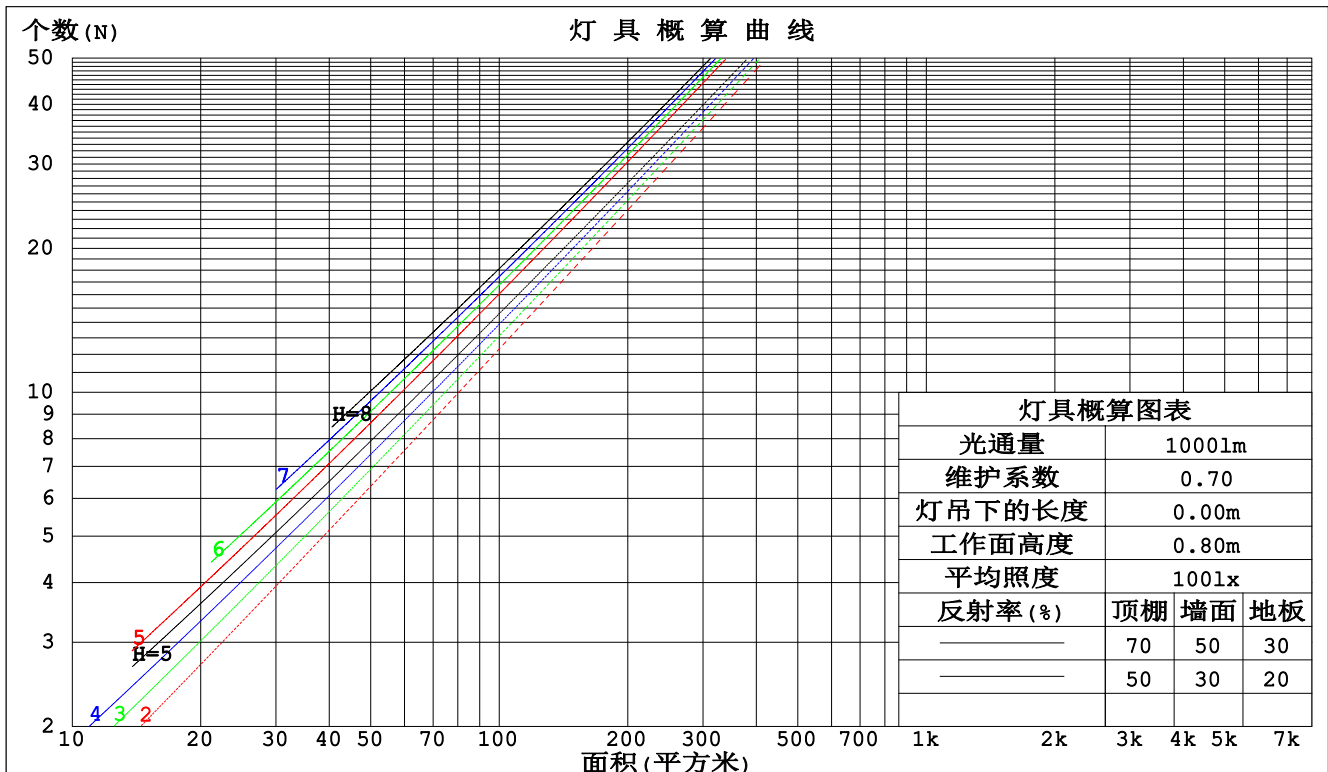

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2018-04-16

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

墙面和天花板利用系数

实测参数: U:220.2V I:0.0948A P:11.91W PF:0.5705 实检光通:607.359x1 lm					
灯具名称: MQT-LED0210C(H)			灯具类型: LED 3000K		灯具重量: N/A
灯具规格: MQT-LED0210C(H)			外型尺寸: 83*110mm		测试编号: 19
制造厂商: C1			发光口面: 0.055		遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.144	.082	.026	.138	.079	.025	.125	.072	.023	.113	.065	.021	.103	.059	.019	
2.0	.135	.074	.023	.129	.071	.022	.119	.066	.021	.109	.061	.019	.100	.057	.018	
3.0	.127	.067	.020	.122	.065	.020	.113	.061	.019	.105	.057	.018	.097	.054	.017	
4.0	.119	.062	.018	.115	.060	.018	.108	.057	.017	.101	.054	.016	.094	.051	.016	
5.0	.113	.057	.017	.109	.056	.016	.103	.054	.016	.097	.051	.015	.091	.049	.015	
6.0	.107	.054	.015	.104	.053	.015	.098	.050	.015	.093	.048	.014	.088	.047	.014	
7.0	.102	.050	.014	.099	.049	.014	.094	.048	.014	.090	.046	.013	.085	.044	.013	
8.0	.097	.048	.013	.095	.047	.013	.091	.045	.013	.087	.044	.013	.083	.043	.012	
9.0	.093	.045	.013	.091	.044	.012	.087	.043	.012	.084	.042	.012	.080	.041	.012	
10.0	.089	.043	.012	.087	.042	.012	.084	.041	.012	.081	.040	.011	.078	.039	.011	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.172	.161	.151	.147	.138	.130	.101	.095	.090	.058	.055	.052	.019	.018	.017	
2.0	.155	.136	.120	.133	.117	.104	.091	.081	.073	.052	.047	.043	.017	.015	.014	
3.0	.140	.117	.098	.120	.101	.085	.083	.070	.060	.048	.041	.035	.015	.013	.012	
4.0	.128	.102	.081	.110	.088	.070	.076	.061	.050	.044	.036	.029	.014	.012	.010	
5.0	.118	.089	.068	.102	.077	.059	.070	.054	.042	.041	.032	.025	.013	.010	.008	
6.0	.110	.080	.058	.094	.069	.051	.065	.048	.036	.038	.028	.021	.012	.009	.007	
7.0	.102	.072	.050	.088	.062	.044	.061	.043	.031	.035	.026	.018	.011	.008	.006	
8.0	.096	.065	.043	.083	.056	.038	.057	.040	.027	.033	.023	.016	.011	.008	.005	
9.0	.091	.059	.038	.078	.051	.033	.054	.036	.024	.031	.021	.014	.010	.007	.005	
10.0	.086	.055	.034	.074	.047	.030	.051	.033	.021	.030	.020	.013	.010	.006	.004	

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.2V I:0.0948A P:11.91W PF:0.5705 实检光通:607.359x1 lm										
灯具名称: MQT-LED0210C(H)					灯具类型: LED 3000K			灯具重量: N/A		
灯具规格: MQT-LED0210C(H)					外型尺寸: 83*110mm			测试编号: 19		
制造厂商: C1					发光口面: 0.055			遮光角: N/A		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	11.9	12.6	12.1	12.7	12.9	10.6	11.3	10.8	11.4	11.6
3H	11.7	12.4	12.0	12.6	12.8	10.4	11.1	10.7	11.3	11.5
4H	11.6	12.2	11.9	12.5	12.7	10.3	11.0	10.6	11.2	11.4
6H	11.5	12.1	11.8	12.4	12.6	10.2	10.8	10.5	11.1	11.3
8H	11.5	12.1	11.8	12.3	12.6	10.2	10.8	10.5	11.0	11.3
12H	11.4	12.0	11.8	12.3	12.5	10.2	10.7	10.5	11.0	11.2
4H 2H	11.6	12.3	11.9	12.5	12.7	10.4	11.0	10.6	11.2	11.4
3H	11.5	12.0	11.8	12.3	12.6	10.2	10.7	10.5	11.0	11.3
4H	11.4	11.9	11.7	12.2	12.5	10.1	10.6	10.4	10.9	11.2
6H	11.3	11.7	11.6	12.0	12.4	10.0	10.4	10.4	10.8	11.1
8H	11.2	11.6	11.6	12.0	12.3	9.9	10.3	10.3	10.7	11.1
12H	11.2	11.5	11.6	11.9	12.3	9.9	10.2	10.3	10.6	11.0
8H 4H	11.2	11.6	11.6	12.0	12.3	9.9	10.3	10.3	10.7	11.1
6H	11.1	11.4	11.5	11.8	12.3	9.8	10.1	10.2	10.5	11.0
8H	11.0	11.3	11.5	11.8	12.2	9.7	10.0	10.2	10.5	10.9
12H	11.0	11.2	11.4	11.7	12.2	9.7	9.9	10.2	10.4	10.9
12H 4H	11.2	11.5	11.6	11.9	12.3	9.9	10.2	10.3	10.6	11.0
6H	11.0	11.3	11.5	11.8	12.2	9.7	10.0	10.2	10.5	10.9
8H	11.0	11.2	11.4	11.7	12.2	9.7	9.9	10.2	10.4	10.9
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 3.3 / -10.2					+ 2.6 / - 9.7				
1.5H	+ 4.6 / - 7.2					+ 3.7 / - 6.8				
2.0H	+ 5.8 / -21.9					+ 5.7 / -17.9				

依据CIE Pub.117计算, 表格已按607.41m光源光通进行修正 ($81\log(F/F_0) = -1.7$)。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:220.2V I:0.0948A P:11.91W PF:0.5705 实检光通:607.359x1 lm		
灯具名称: MQT-LED0210C(H)	灯具类型: LED 3000K	灯具重量: N/A
灯具规格: MQT-LED0210C(H)	外型尺寸: 83*110mm	测试编号: 19
制造厂商: C1	发光口面: 0.055	遮光角: N/A


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	80	89	84	80	88	83	80	77
0.80	97	91	88	96	91	88	95	90	87	84
1.00	101	96	92	100	95	92	98	95	91	88
1.25	105	100	97	103	99	96	102	98	95	91
1.50	107	103	100	106	102	99	104	100	98	94
2.00	109	105	103	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	104	102	96
3.00	112	109	107	110	108	105	107	105	103	97
4.00	114	112	110	112	110	108	108	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2018-04-16

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具等光强曲线

实测参数: U:220.2V I:0.0948A P:11.91W PF:0.5705 实检光通:607.359x1 lm		
灯具名称: MQT-LED0210C(H)	灯具类型: LED 3000K	灯具重量: N/A
灯具规格: MQT-LED0210C(H)	外型尺寸: 83*110mm	测试编号: 19
制造厂商: C1	发光口面: 0.055	遮光角: N/A

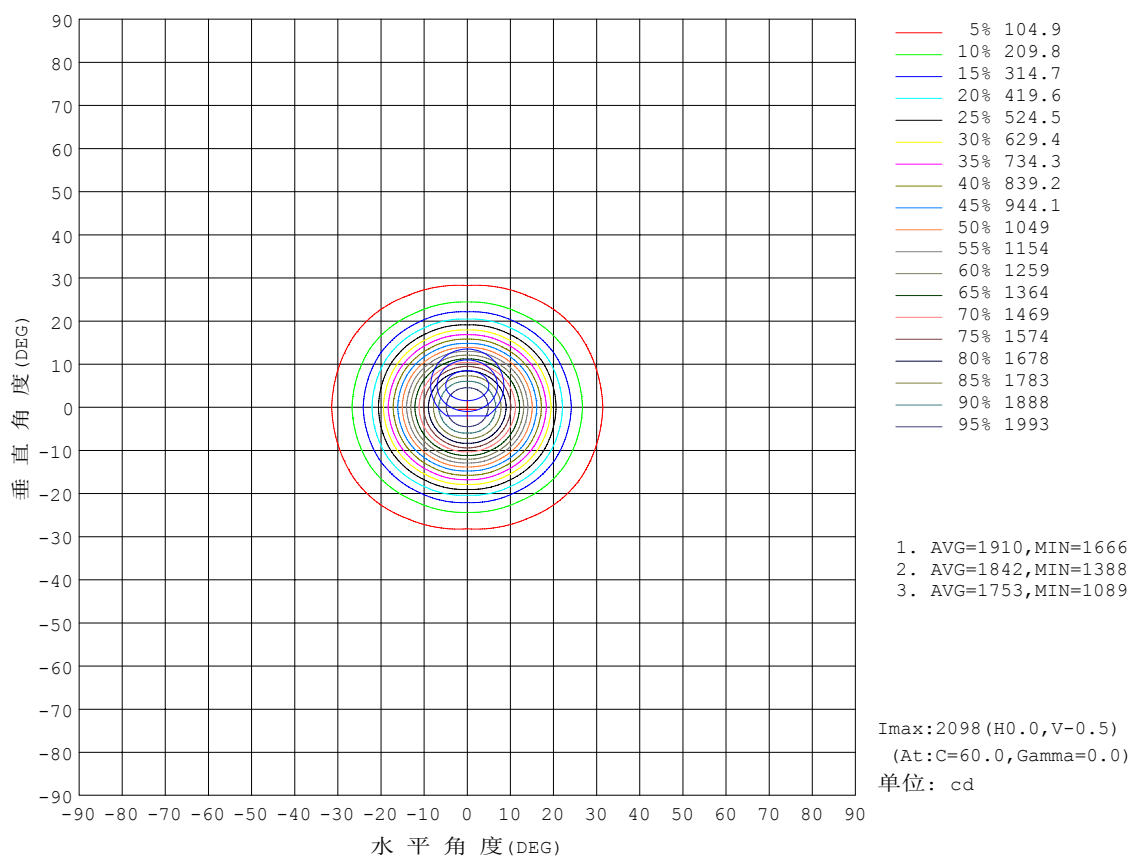


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:220.2V I:0.0948A P:11.91W PF:0.5705 实检光通:607.359x1 lm		
灯具名称: MQT-LED0210C(H)	灯具类型:LED 3000K	灯具重量:N/A
灯具规格:MQT-LED0210C(H)	外型尺寸: 83*110mm	测试编号:19
制造厂商: C1	发光口面:0.055	遮光角:N/A

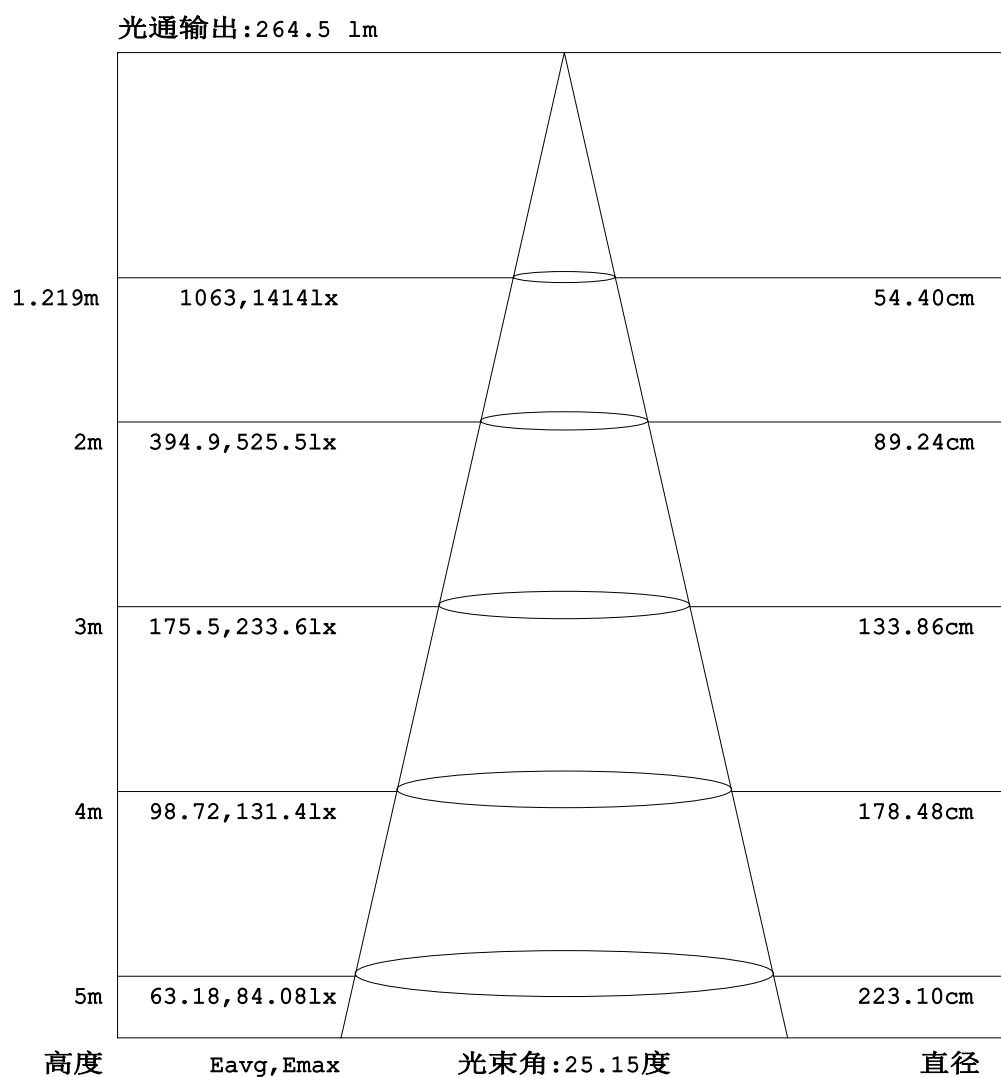


注:曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:weijie
测试日期:2018-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度:65.0%
测试距离:9.490米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:220.2V I:0.0948A P:11.91W PF:0.5705 实检光通:607.359x1 lm		
灯具名称: MQT-LED0210C(H)	灯具类型: LED 3000K	灯具重量: N/A
灯具规格: MQT-LED0210C(H)	外型尺寸: 83*110mm	测试编号: 19
制造厂商: C1	发光口面: 0.055	遮光角: N/A

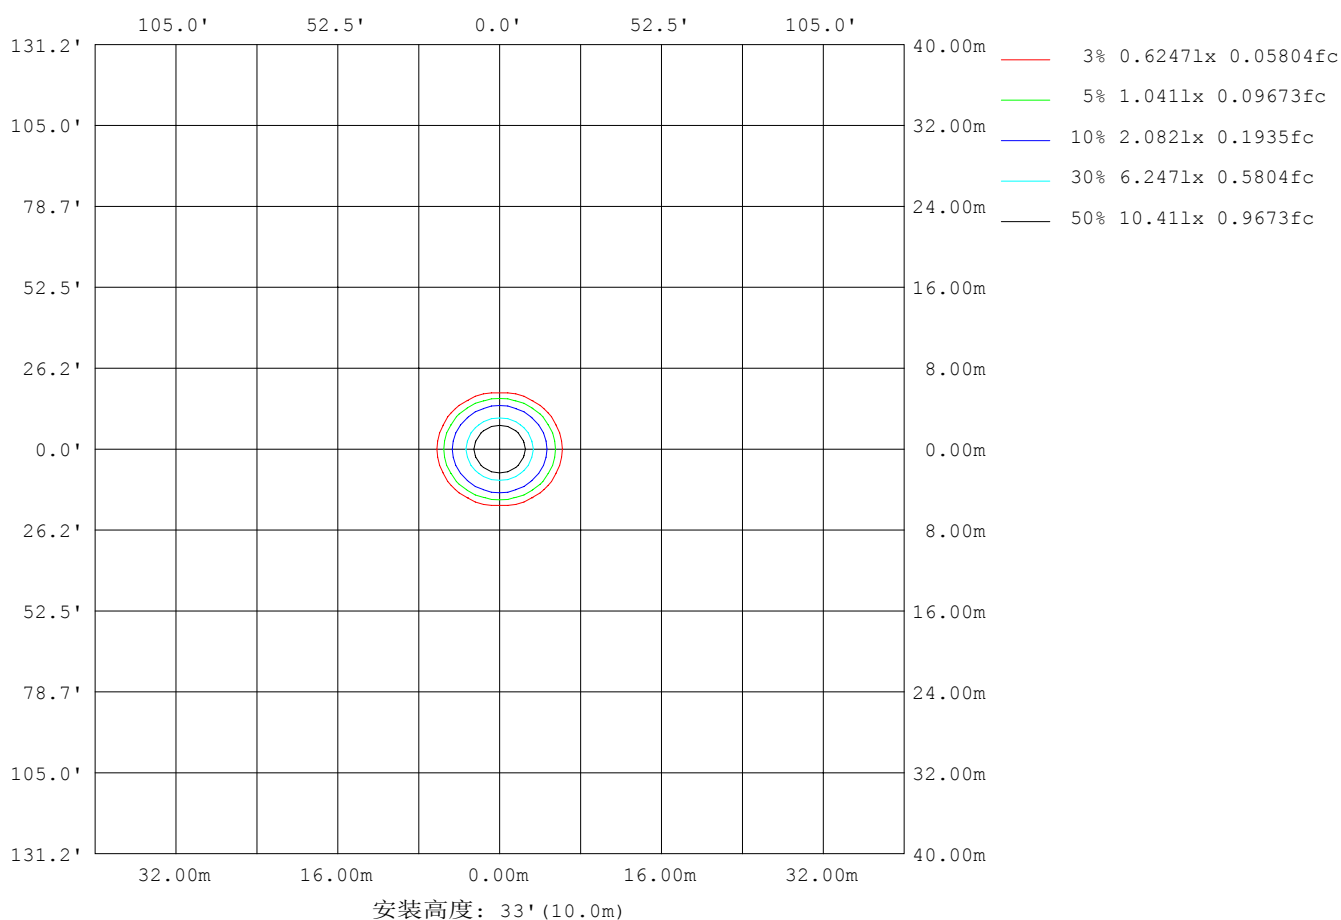

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.2V I:0.0948A P:11.91W PF:0.5705 实检光通:607.359x1 lm		
灯具名称:MQT-LED0210C(H)	灯具类型:LED 3000K	灯具重量:N/A
灯具规格:MQT-LED0210C(H)	外型尺寸: 83*110mm	测试编号:19
制造厂商: C1	发光口面:0.055	遮光角:N/A


平均亮度	数值(cd/m2)
L横(65)av	0
L横(75)av	0
L横(85)av	0
L纵(65)av	89
L纵(75)av	0
L纵(85)av	0
L45(65)av	64
L45(75)av	0
L45(85)av	0

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:weijie
测试日期:2018-04-16

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度:65.0%
测试距离:9.490米 [K=1.0000]
备注:

平面照度曲线

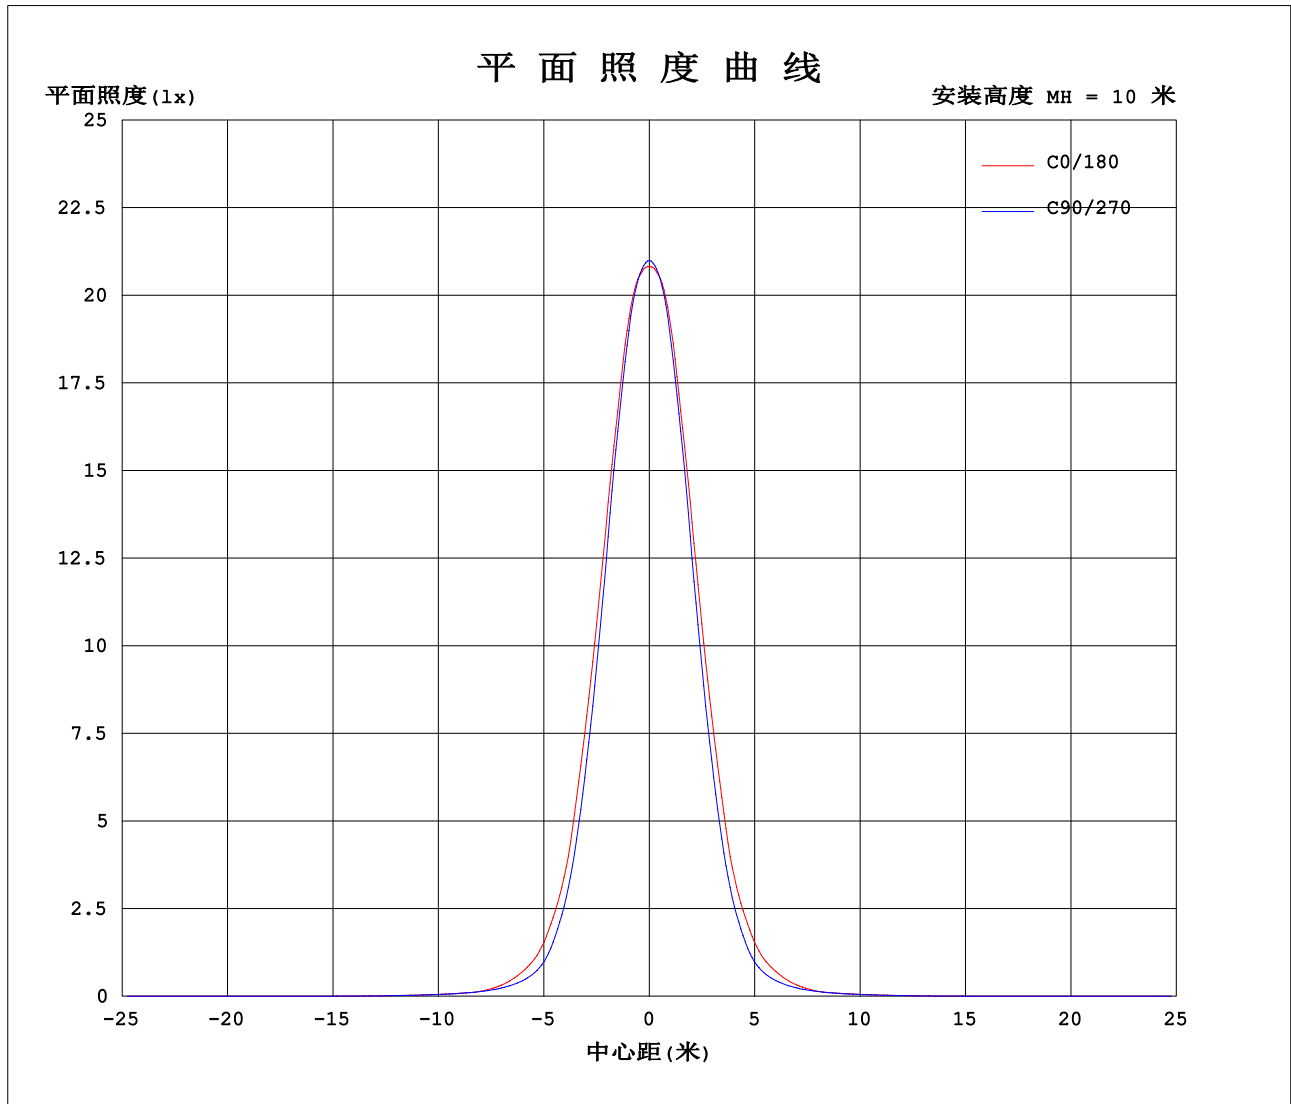

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-16

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:220.2V I:0.0948A P:11.91W PF:0.5705 实检光通:607.359x1 lm																	
灯具名称: MQT-LED0210C(H)									灯具类型: LED 3000K						灯具重量: N/A		
灯具规格: MQT-LED0210C(H)									外型尺寸: 83*110mm						测试编号: 19		
制造厂商: C1									发光口面: 0.055						遮光角: N/A		

表--1

单位: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330					
0	2082	2092	2102	2099	2102	2092	2082	2092	2102	2099	2102	2092					
5	1988	1983	1975	1963	1975	1983	1988	1983	1975	1963	1975	1983					
10	1589	1560	1525	1511	1525	1560	1589	1560	1525	1511	1525	1560					
15	1059	1021	954	919	954	1021	1059	1021	954	919	954	1021					
20	577	545	483	448	483	545	577	545	483	448	483	545					
25	277	251	203	185	203	251	277	251	203	185	203	251					
30	129	116	92.7	81.1	92.7	116	129	116	92.7	81.1	92.7	116					
35	58.8	54.2	46.3	43.3	46.3	54.2	58.8	54.2	46.3	43.3	46.3	54.2					
40	25.0	25.4	25.2	24.9	25.2	25.4	25.0	25.4	25.2	24.9	25.2	25.4					
45	16.2	15.8	15.2	15.0	15.2	15.8	16.2	15.8	15.2	15.0	15.2	15.8					
50	8.86	8.47	7.94	7.82	7.94	8.47	8.86	8.47	7.94	7.82	7.94	8.47					
55	3.27	3.22	3.17	3.23	3.17	3.22	3.27	3.22	3.17	3.23	3.17	3.22					
60	1.01	1.00	0.98	1.01	0.98	1.00	1.01	1.00	0.98	1.01	0.98	1.00					
65	0.00	0.05	0.08	0.09	0.08	0.05	0.00	0.05	0.08	0.09	0.08	0.05					
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00					
130	0.04	0.04	0.03	0.00	0.03	0.04	0.04	0.04	0.03	0.00	0.03	0.04					
135	0.18	0.15	0.12	0.10	0.12	0.15	0.18	0.15	0.12	0.10	0.12	0.15					
140	0.47	0.42	0.36	0.34	0.36	0.42	0.47	0.42	0.36	0.34	0.36	0.42					
145	0.92	0.85	0.79	0.76	0.79	0.85	0.92	0.85	0.79	0.76	0.79	0.85					
150	1.48	1.44	1.37	1.35	1.37	1.44	1.48	1.44	1.37	1.35	1.37	1.44					
155	2.09	2.07	2.04	2.04	2.04	2.07	2.09	2.07	2.04	2.04	2.04	2.07					
160	2.61	2.62	2.65	2.67	2.65	2.62	2.61	2.62	2.65	2.67	2.65	2.62					
165	2.93	2.96	3.01	3.07	3.01	2.96	2.93	2.96	3.01	3.07	3.01	2.96					
170	3.08	3.07	3.10	3.14	3.10	3.07	3.08	3.07	3.10	3.14	3.10	3.07					
175	3.10	3.09	3.14	3.09	3.14	3.09	3.10	3.09	3.14	3.09	3.14	3.09					
180	3.16	3.14	3.14	3.15	3.14	3.14	3.16	3.14	3.14	3.15	3.14	3.14					

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: weijie

测试日期: 2018-04-16

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351

环境湿度: 65.0%

测试距离: 9.490米 [K=1.0000]

备注: