


室内灯具光度数据


实测参数: U:220.2V I:0.0868A P:10.74W PF:0.5617 实检光通:826.437x1 lm		
灯具名称:MQT-LED0210C	灯具类型:LED 3000K	灯具重量:N/A
灯具规格:MQT-LED0210C	外型尺寸:100x92mm	测试编号:11
制造厂商:C1	发光口面:0.09	遮光角:N/A

光源数据		光度数据				光效: 76.95 lm/W
型号	cree 1507 3000k	峰值光强(cd)	1807	S/MH(C0/180)	0.67	
标称功率(W)	22.1092	灯具效率(%)	100.0	S/MH(C90/270)	0.59	
额定电源电压(V)	220	总光通量(lm)	826.44	η UP, DN(C0-180)	0.2, 49.8	
额定光通量(lm)	826.437	CIE分类	直接	η UP, DN(C180-360)	0.2, 49.8	
灯具内光源数(只)	1	上射光通比(%)	0.5	CIBSE SHR NOM	0.50	
实测电源电压(V)	220.1	下射光通比(%)	99.5	CIBSE SHR MAX	0.65	

室内灯具配光曲线

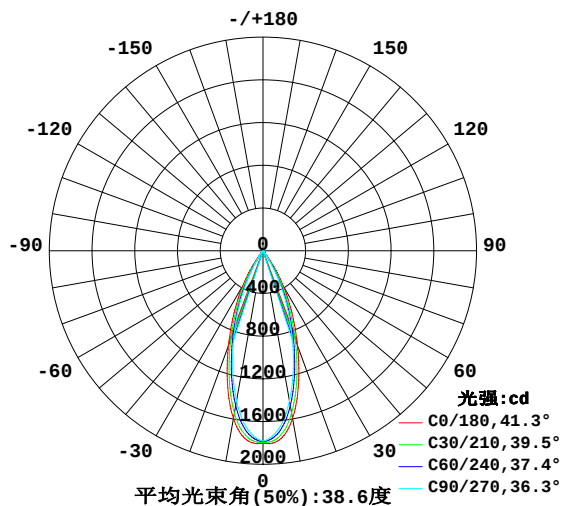

空间等照度曲线(单位:lx)

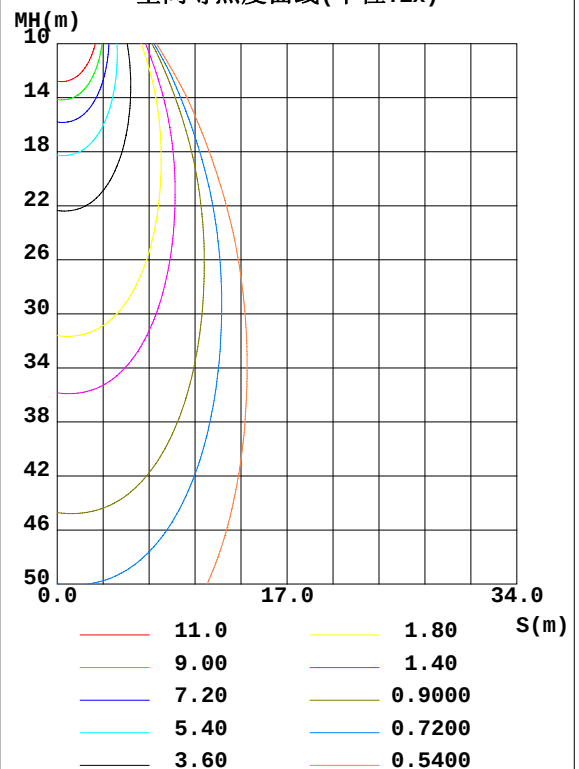

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-14

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
5	1777	1727	1676	1727	1777	1727	1676	1727	0- 5	42.08	42.08	5.09, 5.09
10	1595	1509	1428	1509	1595	1509	1428	1509	5- 10	115.8	157.9	19.1, 19.1
15	1288	1187	1103	1187	1288	1187	1103	1187	10- 15	159.5	317.3	38.4, 38.4
20	947.1	844.9	770.6	844.9	947.1	844.9	770.6	844.9	15- 20	166.6	483.9	58.6, 58.6
25	642.4	541.5	473.9	541.5	642.4	541.5	473.9	541.5	20- 25	144.5	628.5	76.7, 76.7
30	380.1	287.6	231.8	287.6	380.1	287.6	231.8	287.6	25- 30	104.5	732.9	88.7, 88.7
35	163.1	85.60	58.29	85.60	163.1	85.60	58.29	85.60	30- 35	54.92	787.8	95.3, 95.3
40	37.14	25.42	21.91	25.42	37.14	25.42	21.91	25.42	35- 40	16.62	804.5	97.3, 97.3
45	15.65	11.63	10.09	11.63	15.65	11.63	10.09	11.63	40- 45	6.703	811.2	98.2, 98.2
50	7.145	5.180	4.338	5.180	7.145	5.180	4.338	5.180	45- 50	3.306	814.5	98.6, 98.6
55	3.728	3.266	3.023	3.266	3.728	3.266	3.023	3.266	50- 55	1.795	816.3	98.8, 98.8
60	2.881	2.806	2.808	2.806	2.881	2.806	2.808	2.806	55- 60	1.377	817.6	98.9, 98.9
65	2.633	2.522	2.477	2.522	2.633	2.522	2.477	2.522	60- 65	1.305	819.0	99.1, 99.1
70	2.252	2.127	2.068	2.127	2.252	2.127	2.068	2.127	65- 70	1.184	820.1	99.2, 99.2
75	1.800	1.656	1.561	1.656	1.800	1.656	1.561	1.656	70- 75	0.9975	821.1	99.4, 99.4
80	1.265	1.084	0.9313	1.084	1.265	1.084	0.9313	1.084	75- 80	0.7412	821.9	99.4, 99.4
85	0.6415	0.3975	0.1915	0.3975	0.6415	0.3975	0.1915	0.3975	80- 85	0.4103	822.3	99.5, 99.5
90	0.0004	0	0	0	0.0004	0	0	0	85- 90	0.0707	822.4	99.5, 99.5
95	0	0	0	0	0	0	0	0	90- 95	0.0000	822.4	99.5, 99.5
100	0	0	0	0	0	0	0	0	95-100	0	822.4	99.5, 99.5
105	0	0	0	0	0	0	0	0	100-105	0	822.4	99.5, 99.5
110	0	0	0	0	0	0	0	0	105-110	0	822.4	99.5, 99.5
115	0	0	0	0	0	0	0	0	110-115	0	822.4	99.5, 99.5
120	0	0	0	0	0	0	0	0	115-120	0	822.4	99.5, 99.5
125	0	0.0057	0.0830	0.0057	0	0.0057	0.0830	0.0057	120-125	0.0018	822.4	99.5, 99.5
130	0.0824	0.2012	0.3097	0.2012	0.0824	0.2012	0.3097	0.2012	125-130	0.0414	822.4	99.5, 99.5
135	0.3637	0.5104	0.6573	0.5104	0.3637	0.5104	0.6573	0.5104	130-135	0.1401	822.5	99.5, 99.5
140	0.7714	0.9654	1.138	0.9654	0.7714	0.9654	1.138	0.9654	135-140	0.2684	822.8	99.6, 99.6
145	1.306	1.523	1.734	1.523	1.306	1.523	1.734	1.523	140-145	0.4104	823.2	99.6, 99.6
150	1.924	2.149	2.374	2.149	1.924	2.149	2.374	2.149	145-150	0.5381	823.8	99.7, 99.7
155	2.548	2.770	2.953	2.770	2.548	2.770	2.953	2.770	150-155	0.6208	824.4	99.8, 99.8
160	3.072	3.275	3.460	3.275	3.072	3.275	3.460	3.275	155-160	0.6330	825.0	99.8, 99.8
165	3.514	3.680	3.890	3.680	3.514	3.680	3.890	3.680	160-165	0.5731	825.6	99.9, 99.9
170	3.884	4.017	4.133	4.017	3.884	4.017	4.133	4.017	165-170	0.4562	826.0	100, 100
175	4.133	4.229	4.221	4.229	4.133	4.229	4.221	4.229	170-175	0.2945	826.3	100, 100
180	4.320	4.273	4.243	4.273	4.320	4.273	4.243	4.273	175-180	0.1016	826.4	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 811.17 lm

%lum = 98.2%

%lamp = 98.2%

锥面光通量(120度): 817.65 lm

%lum = 98.9%


%lamp = 98.9%

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2018-04-14

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具亮度限制曲线

实测参数: U:220.2V I:0.0868A P:10.74W PF:0.5617 实检光通:826.437x1 lm		
灯具名称:MQT-LED0210C	灯具类型:LED 3000K	灯具重量:N/A
灯具规格:MQT-LED0210C	外型尺寸: 100x92mm	测试编号:11
制造厂商: C1	发光口面:0.09	遮光角:N/A

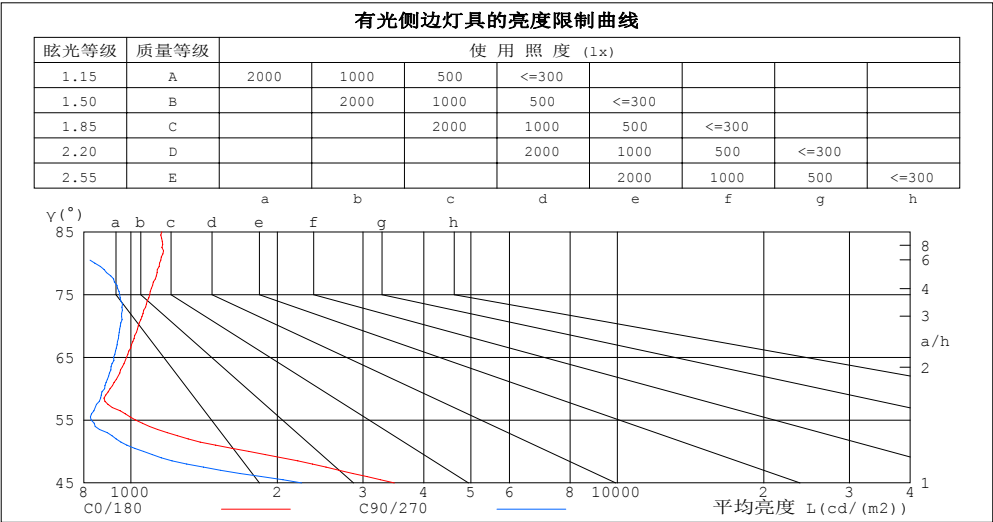

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	1158	346
80	1146	843
75	1094	948
70	1036	951
65	980	922
60	906	883
55	1022	829
50	1748	1061
45	3480	2245


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:weijie
测试日期:2018-04-14

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度:65.0%
测试距离:9.490米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:220.2V I:0.0868A P:10.74W PF:0.5617 实检光通:826.437x1 lm		
灯具名称: MQT-LED0210C	灯具类型: LED 3000K	灯具重量: N/A
灯具规格: MQT-LED0210C	外型尺寸: 100x92mm	测试编号: 11
制造厂商: C1	发光口面: 0.09	遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.09	1.08	1.10	1.08	1.06	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95
2.0	1.05	1.02	.99	1.04	1.00	.98	1.00	.98	.96	.97	.95	.93	.95	.93	.91	.90
3.0	.90	.95	.92	.98	.94	.91	.96	.92	.90	.93	.90	.88	.91	.89	.87	.85
4.0	.94	.90	.86	.93	.89	.86	.91	.88	.85	.89	.86	.84	.87	.85	.83	.81
5.0	.90	.85	.81	.89	.84	.81	.87	.83	.80	.86	.82	.79	.84	.81	.79	.77
6.0	.86	.81	.77	.85	.80	.77	.83	.79	.76	.82	.78	.76	.81	.78	.75	.74
7.0	.82	.77	.73	.81	.76	.73	.80	.76	.73	.79	.75	.72	.78	.74	.72	.71
8.0	.78	.73	.70	.78	.73	.70	.77	.72	.69	.76	.72	.69	.75	.71	.69	.67
9.0	.75	.70	.67	.74	.70	.66	.74	.69	.66	.73	.69	.66	.72	.68	.66	.65
10.0	.72	.67	.64	.71	.67	.64	.71	.66	.63	.70	.66	.63	.69	.66	.63	.62

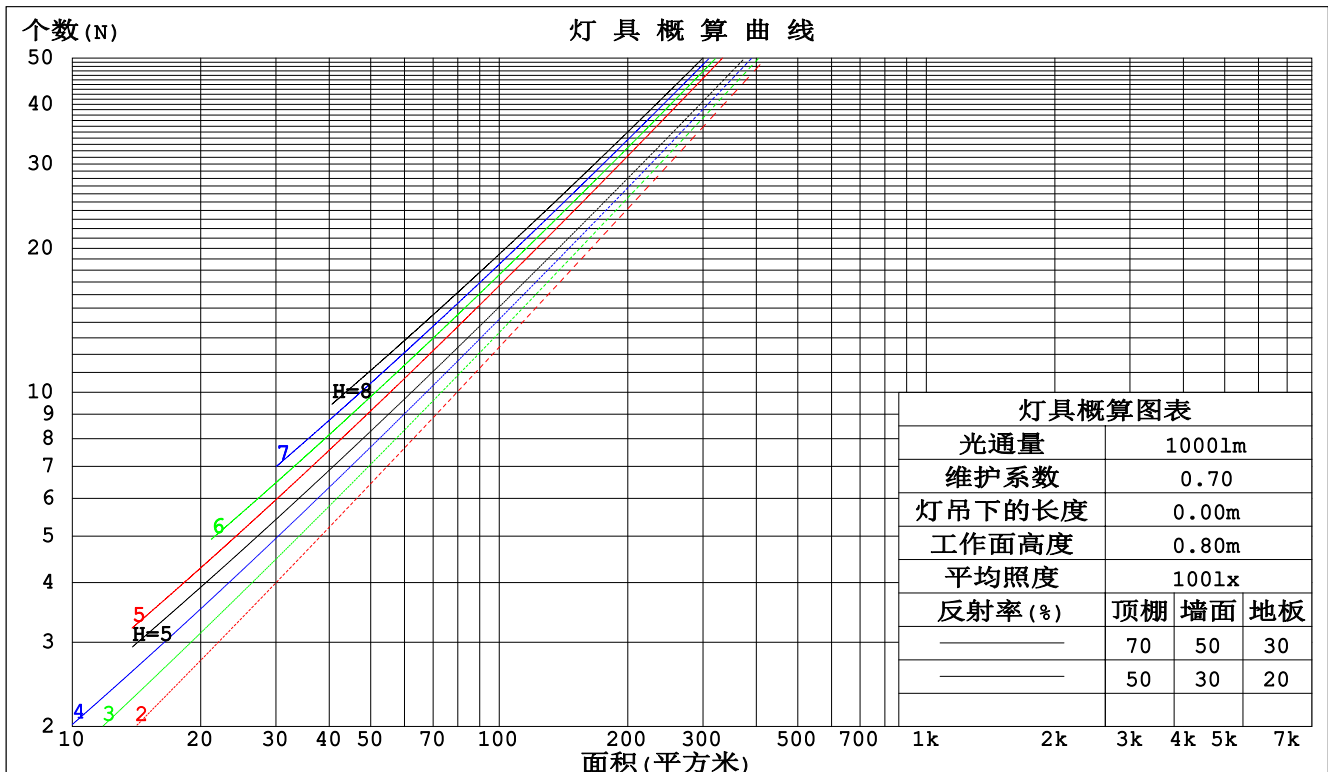

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2018-04-14

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

墙面和天花板利用系数

实测参数: U:220.2V I:0.0868A P:10.74W PF:0.5617 实检光通:826.437x1 lm					
灯具名称:MQT-LED0210C			灯具类型:LED 3000K		灯具重量:N/A
灯具规格:MQT-LED0210C			外型尺寸:100x92mm		测试编号:11
制造厂商:C1			发光口面:0.09		遮光角:N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.158	.090	.028	.151	.086	.027	.138	.079	.025	.126	.073	.023	.116	.067	.022	
2.0	.148	.081	.025	.143	.079	.024	.132	.073	.023	.122	.068	.021	.113	.064	.020	
3.0	.140	.074	.022	.135	.072	.022	.126	.068	.021	.118	.064	.020	.110	.061	.019	
4.0	.132	.069	.020	.128	.067	.020	.120	.064	.019	.113	.061	.018	.106	.058	.018	
5.0	.125	.064	.019	.122	.063	.018	.115	.060	.018	.109	.058	.017	.103	.055	.017	
6.0	.119	.060	.017	.116	.059	.017	.111	.057	.016	.105	.055	.016	.100	.053	.016	
7.0	.114	.056	.016	.111	.055	.016	.106	.054	.015	.101	.052	.015	.097	.050	.015	
8.0	.109	.053	.015	.107	.053	.015	.102	.051	.015	.098	.050	.014	.094	.048	.014	
9.0	.105	.051	.014	.103	.050	.014	.098	.049	.014	.095	.047	.014	.091	.046	.013	
10.0	.101	.048	.013	.099	.048	.013	.095	.047	.013	.092	.045	.013	.088	.044	.013	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.174	.161	.150	.149	.138	.129	.102	.095	.089	.058	.055	.052	.019	.018	.017	
2.0	.157	.136	.119	.134	.117	.103	.092	.081	.072	.053	.047	.042	.017	.015	.014	
3.0	.143	.117	.097	.123	.101	.084	.084	.070	.059	.049	.041	.035	.016	.013	.011	
4.0	.132	.102	.080	.113	.088	.069	.078	.062	.049	.045	.036	.029	.014	.012	.009	
5.0	.122	.090	.067	.105	.078	.058	.072	.055	.041	.042	.032	.024	.014	.010	.008	
6.0	.114	.081	.057	.098	.070	.049	.068	.049	.035	.039	.029	.021	.013	.009	.007	
7.0	.107	.073	.049	.092	.063	.042	.064	.044	.030	.037	.026	.018	.012	.009	.006	
8.0	.101	.066	.042	.087	.058	.037	.060	.040	.026	.035	.024	.016	.011	.008	.005	
9.0	.096	.061	.037	.083	.053	.033	.057	.037	.023	.033	.022	.014	.011	.007	.005	
10.0	.091	.056	.033	.079	.049	.029	.055	.034	.021	.032	.020	.012	.010	.007	.004	

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-14

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.2V I:0.0868A P:10.74W PF:0.5617 实检光通:826.437x1 lm										
灯具名称: MQT-LED0210C					灯具类型: LED 3000K			灯具重量: N/A		
灯具规格: MQT-LED0210C					外型尺寸: 100x92mm			测试编号: 11		
制造厂商: C1					发光口面: 0.09			遮光角: N/A		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	12.9	13.7	13.1	13.8	14.0	9.0	9.8	9.2	10.0	10.1
3H	12.8	13.5	13.0	13.7	13.9	9.0	9.8	9.3	10.0	10.2
4H	12.8	13.4	13.0	13.7	13.9	9.1	9.8	9.3	10.0	10.2
6H	12.7	13.4	13.0	13.6	13.9	9.1	9.7	9.4	10.0	10.2
8H	12.7	13.3	13.0	13.6	13.9	9.1	9.7	9.4	10.0	10.2
12H	12.7	13.3	13.0	13.6	13.8	9.1	9.7	9.4	9.9	10.2
4H 2H	12.7	13.4	12.9	13.6	13.8	8.8	9.5	9.1	9.7	10.0
3H	12.6	13.2	12.9	13.5	13.7	8.9	9.5	9.3	9.8	10.1
4H	12.6	13.1	12.9	13.4	13.7	9.0	9.6	9.4	9.9	10.2
6H	12.6	13.1	12.9	13.4	13.7	9.1	9.6	9.5	9.9	10.3
8H	12.6	13.0	13.0	13.4	13.7	9.1	9.6	9.5	9.9	10.3
12H	12.6	13.0	13.0	13.3	13.7	9.1	9.5	9.5	9.9	10.3
8H 4H	12.5	12.9	12.9	13.3	13.6	9.0	9.5	9.4	9.8	10.2
6H	12.5	12.9	12.9	13.3	13.7	9.2	9.5	9.6	9.9	10.4
8H	12.5	12.8	13.0	13.2	13.7	9.2	9.5	9.7	10.0	10.4
12H	12.5	12.8	13.0	13.2	13.7	9.2	9.5	9.7	9.9	10.4
12H 4H	12.4	12.8	12.8	13.2	13.6	9.0	9.4	9.4	9.8	10.2
6H	12.4	12.8	12.9	13.2	13.6	9.1	9.5	9.6	9.9	10.3
8H	12.5	12.7	12.9	13.2	13.7	9.2	9.5	9.7	9.9	10.4
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 4.1 / - 3.6					+ 1.9 / - 2.0				
1.5H	+ 6.4 / - 3.6					+ 3.7 / - 2.0				
2.0H	+ 3.0 / - 0.8					+ 1.7 / - 0.5				

依据CIE Pub.117计算, 表格已按826.4lm光源光通进行修正 ($81\log(F/F_0) = -0.7$)。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-14

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:220.2V I:0.0868A P:10.74W PF:0.5617 实检光通:826.437x1 lm		
灯具名称: MQT-LED0210C	灯具类型: LED 3000K	灯具重量: N/A
灯具规格: MQT-LED0210C	外型尺寸: 100x92mm	测试编号: 11
制造厂商: C1	发光口面: 0.09	遮光角: N/A


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	81	89	84	81	89	84	80	77
0.80	97	92	88	96	91	88	95	91	88	84
1.00	101	96	92	100	95	92	98	95	92	88
1.25	104	100	97	103	99	96	101	98	95	91
1.50	107	103	100	106	102	99	104	100	98	94
2.00	109	105	102	108	104	102	105	102	100	95
2.50	111	107	104	109	106	104	106	104	102	96
3.00	112	109	107	110	108	105	107	105	103	97
4.00	114	112	110	112	110	108	108	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2018-04-14

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具等光强曲线

实测参数: U:220.2V I:0.0868A P:10.74W PF:0.5617 实检光通:826.437x1 lm		
灯具名称:MQT-LED0210C	灯具类型:LED 3000K	灯具重量:N/A
灯具规格:MQT-LED0210C	外型尺寸:100x92mm	测试编号:11
制造厂商:C1	发光口面:0.09	遮光角:N/A

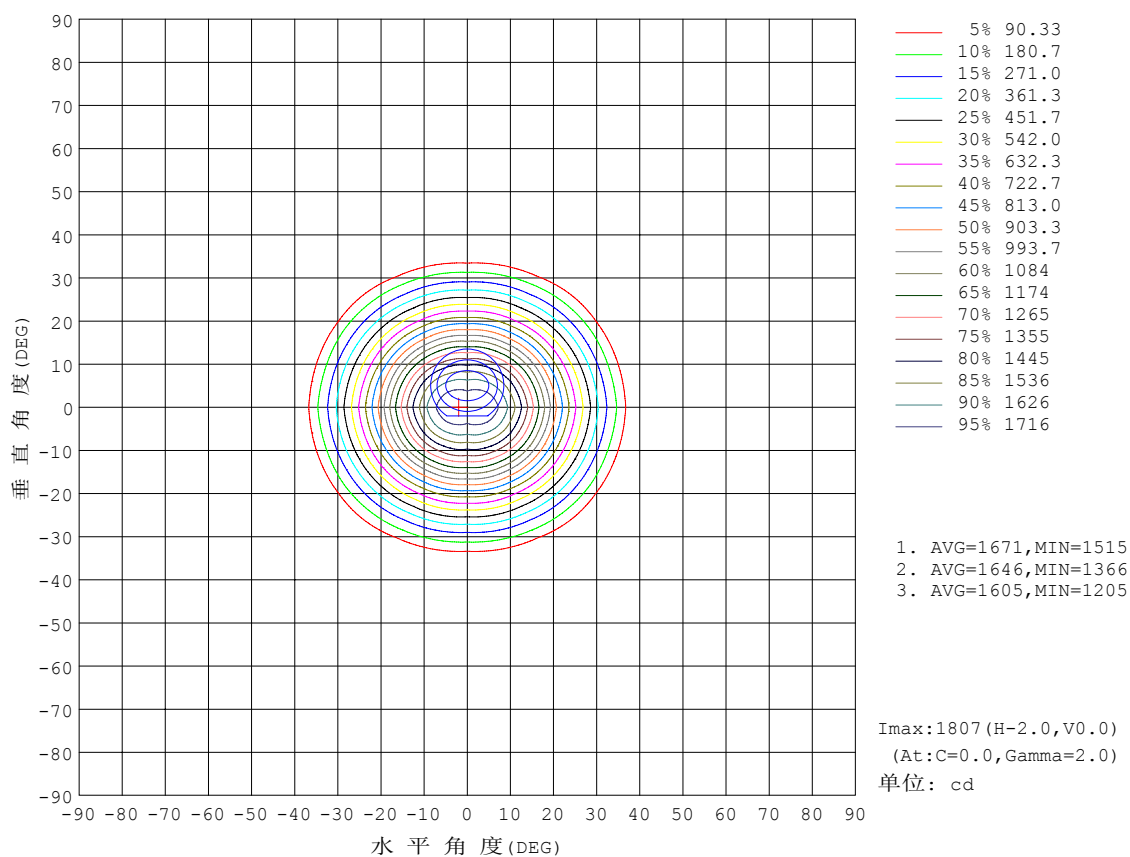


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-14

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:220.2V I:0.0868A P:10.74W PF:0.5617 实检光通:826.437x1 lm		
灯具名称:MQT-LED0210C	灯具类型:LED 3000K	灯具重量:N/A
灯具规格:MQT-LED0210C	外型尺寸: 100x92mm	测试编号:11
制造厂商: C1	发光口面:0.09	遮光角:N/A

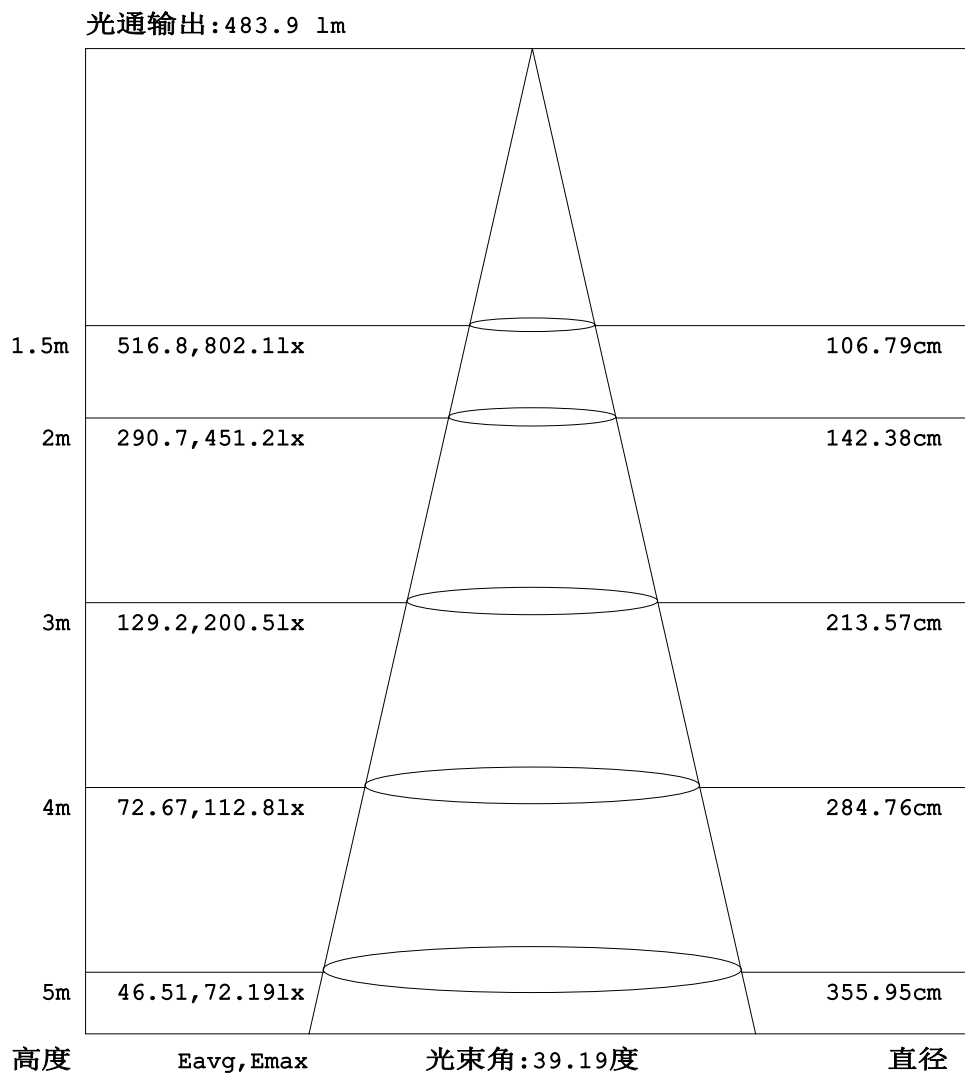


注:曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:weijie
测试日期:2018-04-14

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度:65.0%
测试距离:9.490米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:220.2V I:0.0868A P:10.74W PF:0.5617 实检光通:826.437x1 lm		
灯具名称: MQT-LED0210C	灯具类型: LED 3000K	灯具重量: N/A
灯具规格: MQT-LED0210C	外型尺寸: 100x92mm	测试编号: 11
制造厂商: C1	发光口面: 0.09	遮光角: N/A

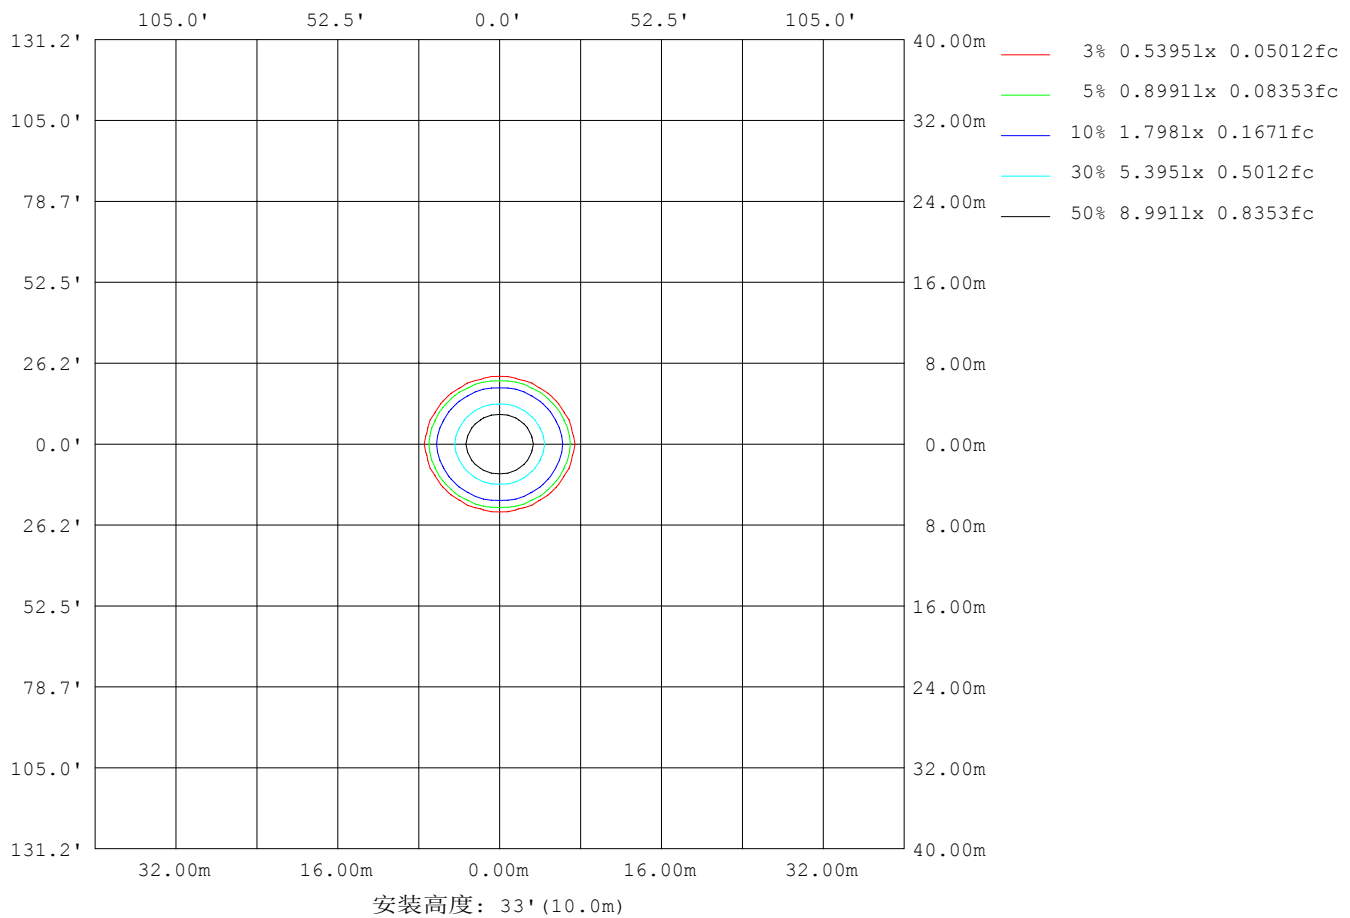

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-14

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.2V I:0.0868A P:10.74W PF:0.5617 实检光通:826.437x1 lm		
灯具名称: MQT-LED0210C	灯具类型: LED 3000K	灯具重量: N/A
灯具规格: MQT-LED0210C	外型尺寸: 100x92mm	测试编号: 11
制造厂商: C1	发光口面: 0.09	遮光角: N/A


平均亮度	数值(cd/m2)
L横(65)av	980
L横(75)av	1094
L横(85)av	1158
L纵(65)av	922
L纵(75)av	948
L纵(85)av	346
L45(65)av	937
L45(75)av	1004
L45(85)av	713

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-14

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

平面照度曲线

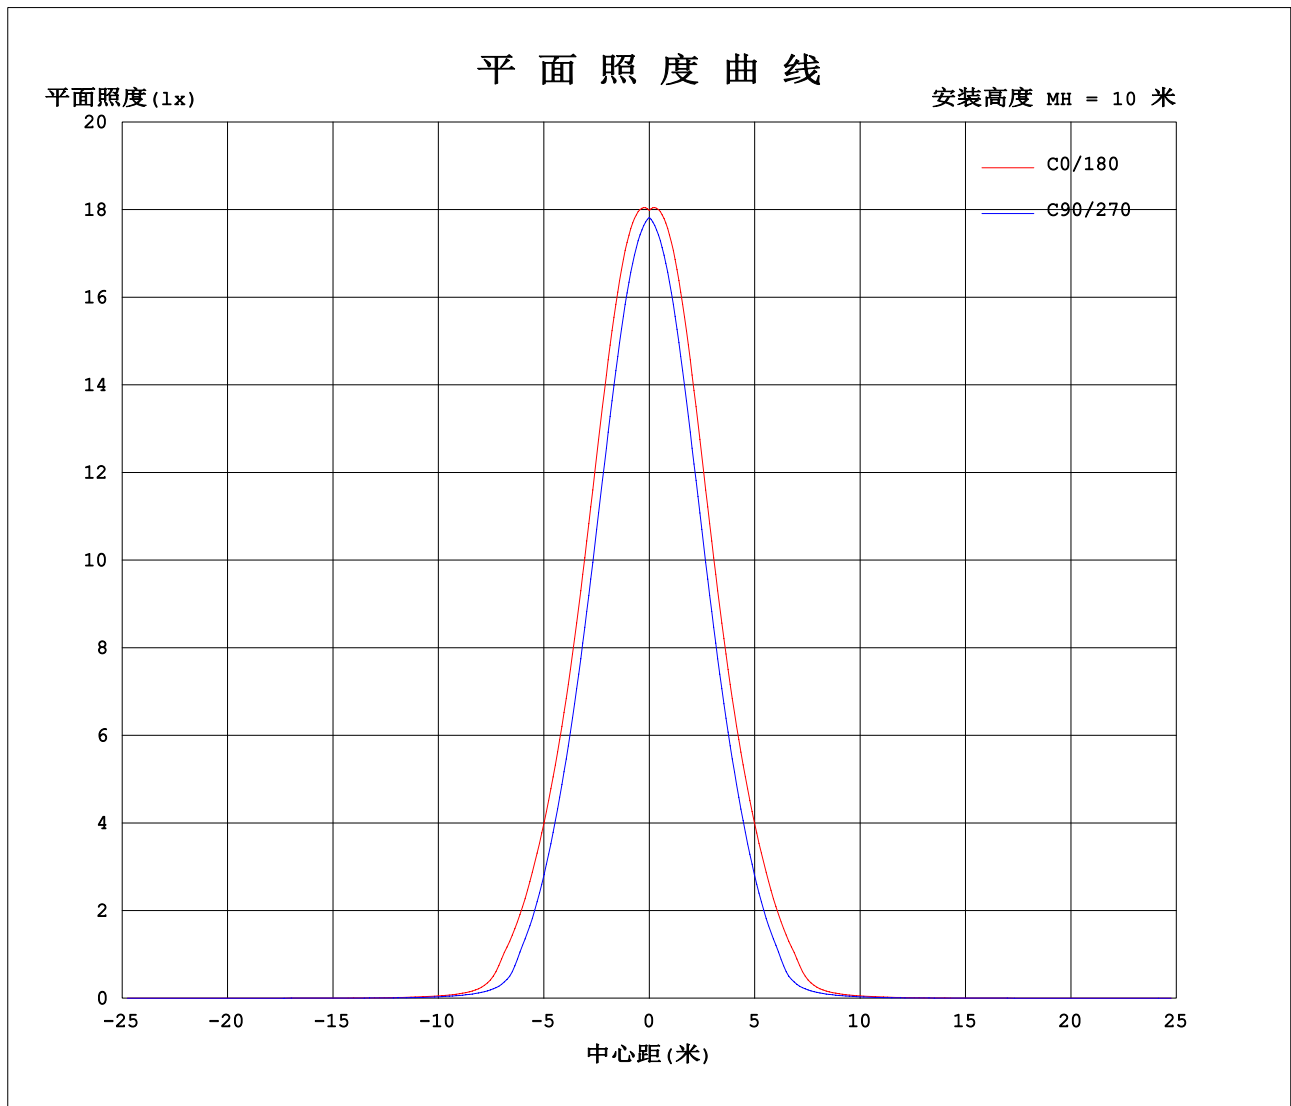

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-14

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:220.2V I:0.0868A P:10.74W PF:0.5617 实检光通:826.437x1 lm																	
灯具名称: MQT-LED0210C									灯具类型: LED 3000K						灯具重量: N/A		
灯具规格: MQT-LED0210C									外型尺寸: 100x92mm						测试编号: 11		
制造厂商: C1									发光口面: 0.09						遮光角: N/A		

表--1

单位: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1798	1792	1786	1783	1786	1792	1798	1792	1786	1783	1786	1792						
5	1777	1747	1706	1676	1706	1747	1777	1747	1706	1676	1706	1747						
10	1595	1544	1474	1428	1474	1544	1595	1544	1474	1428	1474	1544						
15	1288	1226	1148	1103	1148	1226	1288	1226	1148	1103	1148	1226						
20	947	882	808	771	808	882	947	882	808	771	808	882						
25	642	575	508	474	508	575	642	575	508	474	508	575						
30	380	319	256	232	256	319	380	319	256	232	256	319						
35	163	104	66.8	58.3	66.8	104	163	104	66.8	58.3	66.8	104						
40	37.1	28.2	22.6	21.9	22.6	28.2	37.1	28.2	22.6	21.9	22.6	28.2						
45	15.6	12.7	10.6	10.1	10.6	12.7	15.6	12.7	10.6	10.1	10.6	12.7						
50	7.15	5.68	4.69	4.34	4.69	5.68	7.15	5.68	4.69	4.34	4.69	5.68						
55	3.73	3.41	3.12	3.02	3.12	3.41	3.73	3.41	3.12	3.02	3.12	3.41						
60	2.88	2.79	2.83	2.81	2.83	2.79	2.88	2.79	2.83	2.81	2.83	2.79						
65	2.63	2.52	2.53	2.48	2.53	2.52	2.63	2.52	2.53	2.48	2.53	2.52						
70	2.25	2.12	2.13	2.07	2.13	2.12	2.25	2.12	2.13	2.07	2.13	2.12						
75	1.80	1.67	1.65	1.56	1.65	1.67	1.80	1.67	1.65	1.56	1.65	1.67						
80	1.26	1.11	1.06	0.93	1.06	1.11	1.26	1.11	1.06	0.93	1.06	1.11						
85	0.64	0.45	0.35	0.19	0.35	0.45	0.64	0.45	0.35	0.19	0.35	0.45						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.01	0.00	0.08	0.00	0.01	0.00	0.01	0.00	0.08	0.00	0.01						
130	0.08	0.20	0.20	0.31	0.20	0.20	0.08	0.20	0.20	0.31	0.20	0.20						
135	0.36	0.49	0.53	0.66	0.53	0.49	0.36	0.49	0.53	0.66	0.53	0.49						
140	0.77	0.93	1.00	1.14	1.00	0.93	0.77	0.93	1.00	1.14	1.00	0.93						
145	1.31	1.47	1.57	1.73	1.57	1.47	1.31	1.47	1.57	1.73	1.57	1.47						
150	1.92	2.10	2.20	2.37	2.20	2.10	1.92	2.10	2.20	2.37	2.20	2.10						
155	2.55	2.73	2.81	2.95	2.81	2.73	2.55	2.73	2.81	2.95	2.81	2.73						
160	3.07	3.23	3.32	3.46	3.32	3.23	3.07	3.23	3.32	3.46	3.32	3.23						
165	3.51	3.66	3.70	3.89	3.70	3.66	3.51	3.66	3.70	3.89	3.70	3.66						
170	3.88	4.00	4.03	4.13	4.03	4.00	3.88	4.00	4.03	4.13	4.03	4.00						
175	4.13	4.24	4.22	4.22	4.22	4.24	4.13	4.24	4.22	4.22	4.22	4.24						
180	4.32	4.30	4.24	4.24	4.24	4.30	4.32	4.30	4.24	4.24	4.24	4.30						

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: weijie

测试日期: 2018-04-14

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351

环境湿度: 65.0%

测试距离: 9.490米 [K=1.0000]

备注: