

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
5	2650	2651	2632	2651	2650	2609	2632	2609	0- 5	65.72	65.72	7.09, 7.09
10	2076	2045	2020	2045	2076	2018	2020	2018	5- 10	166.4	232.2	25.1, 25.1
15	1348	1288	1275	1288	1348	1313	1275	1313	10- 15	195.5	427.7	46.2, 46.2
20	761.2	677.2	674.2	677.2	761.2	729.6	674.2	729.6	15- 20	160.5	588.2	63.5, 63.5
25	407.5	363.1	368.1	363.1	407.5	395.4	368.1	395.4	20- 25	109.3	697.5	75.3, 75.3
30	235.2	214.3	219.7	214.3	235.2	231.2	219.7	231.2	25- 30	74.19	771.7	83.3, 83.3
35	145.1	135.9	139.4	135.9	145.1	143.0	139.4	143.0	30- 35	52.39	824.1	88.9, 88.9
40	92.30	89.09	92.22	89.09	92.30	91.72	92.22	91.72	35- 40	37.98	862.0	93.93
45	55.81	53.71	52.09	53.71	55.81	56.32	52.09	56.32	40- 45	26.62	888.7	95.9, 95.9
50	25.02	23.27	21.51	23.27	25.02	25.44	21.51	25.44	45- 50	15.22	903.9	97.5, 97.5
55	10.39	7.886	7.429	7.886	10.39	10.13	7.429	10.13	50- 55	6.583	910.5	98.2, 98.2
60	6.133	5.868	5.828	5.868	6.133	5.964	5.828	5.964	55- 60	3.190	913.7	98.6, 98.6
65	5.090	5.124	5.068	5.124	5.090	4.963	5.068	4.963	60- 65	2.661	916.3	98.9, 98.9
70	4.159	4.129	3.992	4.129	4.159	4.005	3.992	4.005	65- 70	2.322	918.6	99.1, 99.1
75	3.029	2.960	2.807	2.960	3.029	2.852	2.807	2.852	70- 75	1.828	920.5	99.3, 99.3
80	1.880	1.796	1.624	1.796	1.880	1.706	1.624	1.706	75- 80	1.242	921.7	99.5, 99.5
85	0.7989	0.7433	0.6034	0.7433	0.7989	0.6980	0.6034	0.6980	80- 85	0.6616	922.4	99.5, 99.5
90	0.1974	0.0564	0.0060	0.0564	0.1974	0.1369	0.0060	0.1369	85- 90	0.1950	922.6	99.5, 99.5
95	0	0	0	0	0	0	0	0	90- 95	0.0101	922.6	99.5, 99.5
100	0	0	0	0	0	0	0	0	95-100	0	922.6	99.5, 99.5
105	0	0	0	0	0	0	0	0	100-105	0	922.6	99.5, 99.5
110	0	0	0	0	0	0	0	0	105-110	0	922.6	99.5, 99.5
115	0	0	0	0	0	0	0	0	110-115	0	922.6	99.5, 99.5
120	0.0026	0.0186	0.0213	0.0186	0.0026	0.0052	0.0213	0.0052	115-120	0.0015	922.6	99.5, 99.5
125	0.1005	0.0741	0.0715	0.0741	0.1005	0.0978	0.0715	0.0978	120-125	0.0202	922.6	99.6, 99.6
130	0.2325	0.2117	0.2116	0.2117	0.2325	0.2170	0.2116	0.2170	125-130	0.0629	922.7	99.6, 99.6
135	0.4522	0.4153	0.3996	0.4153	0.4522	0.4363	0.3996	0.4363	130-135	0.1243	922.8	99.6, 99.6
140	0.8356	0.7621	0.7435	0.7621	0.8356	0.7880	0.7435	0.7880	135-140	0.2167	923.0	99.6, 99.6
145	1.417	1.325	1.307	1.325	1.417	1.346	1.307	1.346	140-145	0.3482	923.4	99.6, 99.6
150	2.177	2.093	2.072	2.093	2.177	2.101	2.072	2.101	145-150	0.5033	923.9	99.7, 99.7
155	3.002	2.957	2.936	2.957	3.002	2.955	2.936	2.955	150-155	0.6390	924.5	99.8, 99.8
160	3.712	3.732	3.748	3.732	3.712	3.696	3.748	3.696	155-160	0.7016	925.2	99.8, 99.8
165	4.130	4.182	4.240	4.182	4.130	4.146	4.240	4.146	160-165	0.6548	925.9	99.9, 99.9
170	4.275	4.291	4.312	4.291	4.275	4.233	4.312	4.233	165-170	0.5034	926.4	100, 100
175	4.241	4.299	4.225	4.299	4.241	4.272	4.225	4.272	170-175	0.3050	926.7	100, 100
180	4.375	4.309	4.352	4.309	4.375	4.360	4.352	4.360	175-180	0.1023	926.8	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 888.67 lm

%lum = 95.9%

%lamp = 95.9%

锥面光通量(120度): 913.66 lm

%lum = 98.6%


%lamp = 98.6%

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-26

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数: U:220.1V I:0.0625A P:12.46W PF:0.9049 实检光通:926.763x1 lm		
灯具名称:MQT-LED0412-I2(K)	灯具类型:LED 3000K	灯具重量:N/A
灯具规格:MQT-LED0412-I2(K)	外型尺寸: 89*87MM	测试编号:28
制造厂商: C1	发光口面:0.075	遮光角:N/A

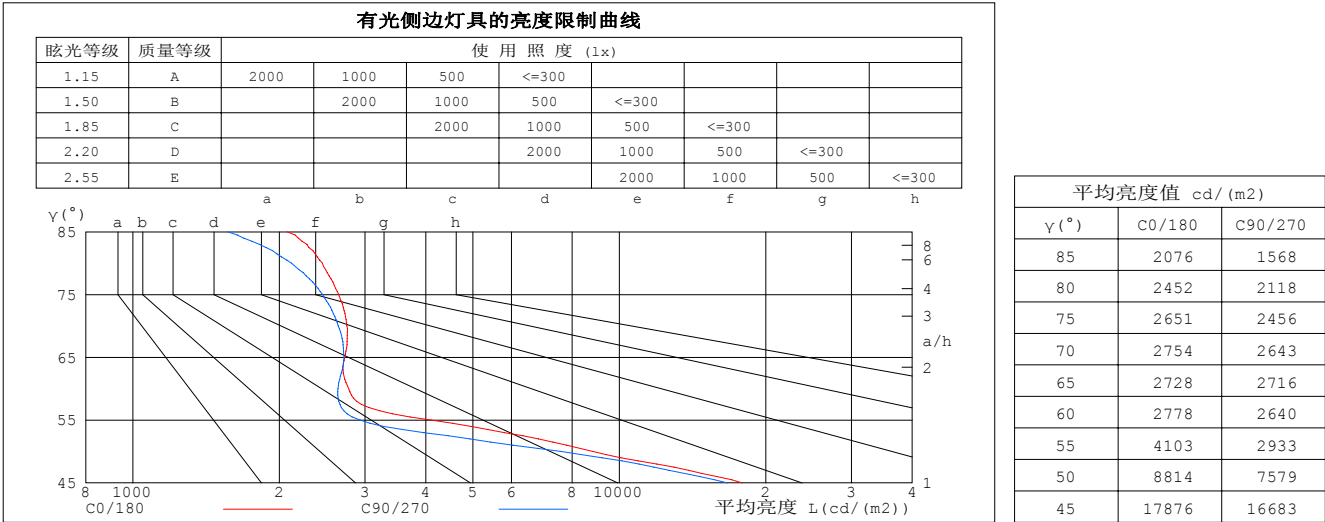


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:weijie
测试日期:2018-04-26

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度:65.0%
测试距离:9.490米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:220.1V I:0.0625A P:12.46W PF:0.9049 实检光通:926.763x1 lm		
灯具名称:MQT-LED0412-I2(K)	灯具类型:LED 3000K	灯具重量:N/A
灯具规格:MQT-LED0412-I2(K)	外型尺寸: 89*87MM	测试编号:28
制造厂商: C1	发光口面:0.075	遮光角:N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.09	1.07	1.09	1.08	1.06	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95
2.0	1.05	1.02	.99	1.03	1.00	.98	1.00	.98	.95	.97	.95	.93	.94	.93	.91	.90
3.0	.90	.95	.92	.98	.94	.91	.96	.92	.90	.93	.90	.88	.91	.89	.87	.85
4.0	.94	.90	.86	.93	.89	.86	.91	.88	.85	.89	.86	.84	.87	.85	.83	.81
5.0	.90	.85	.81	.89	.84	.81	.87	.83	.80	.86	.82	.80	.84	.81	.79	.78
6.0	.86	.81	.77	.85	.80	.77	.84	.80	.77	.82	.79	.76	.81	.78	.75	.74
7.0	.82	.77	.74	.82	.77	.74	.80	.76	.73	.79	.75	.73	.78	.75	.72	.71
8.0	.79	.74	.71	.78	.74	.70	.77	.73	.70	.76	.73	.70	.75	.72	.69	.68
9.0	.76	.71	.68	.75	.71	.68	.74	.70	.67	.74	.70	.67	.73	.69	.67	.66
10.0	.73	.68	.65	.73	.68	.65	.72	.68	.65	.71	.67	.65	.70	.67	.64	.63

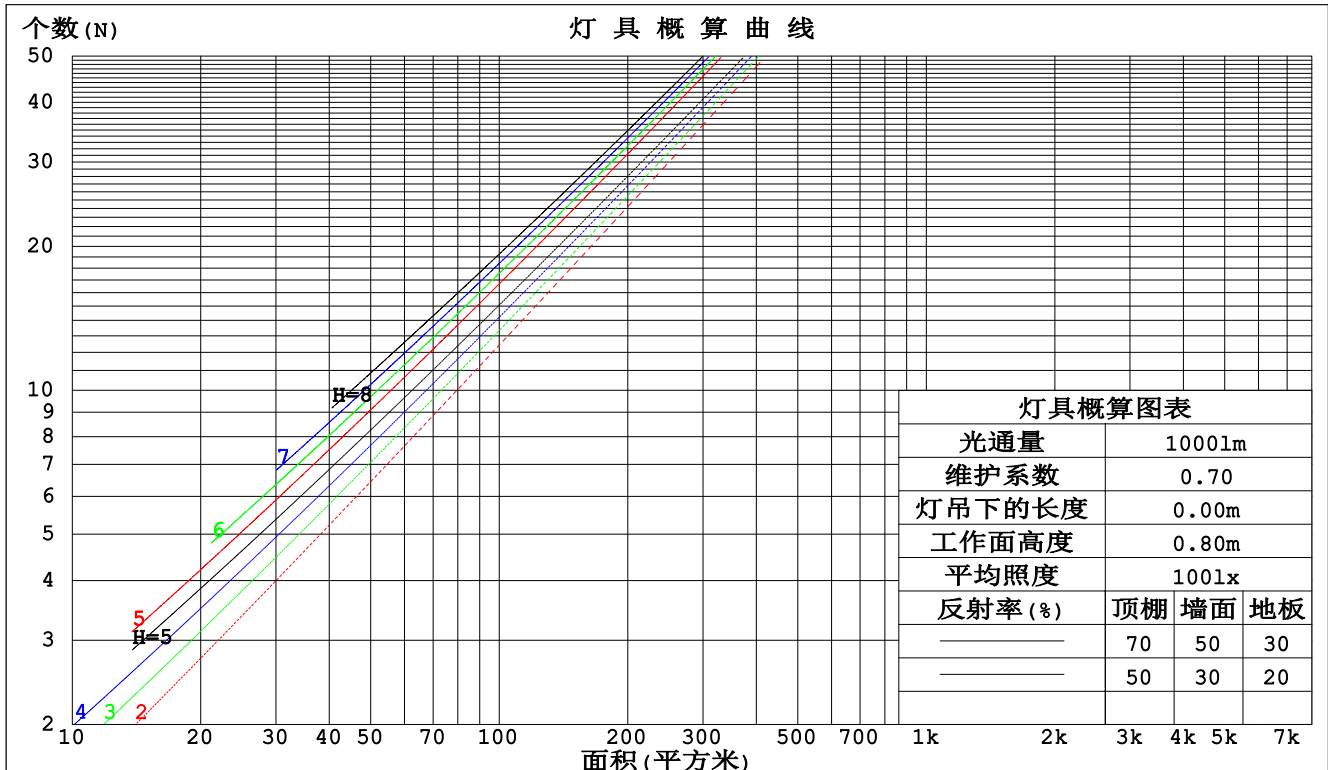

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2018-04-26

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

墙面和天花板利用系数

实测参数: U:220.1V I:0.0625A P:12.46W PF:0.9049 实检光通:926.763x1 lm					
灯具名称: MQT-LED0412-I2(K)			灯具类型: LED 3000K		灯具重量: N/A
灯具规格: MQT-LED0412-I2(K)			外型尺寸: 89*87MM		测试编号: 28
制造厂商: C1			发光口面: 0.075		遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.158	.090	.029	.151	.086	.027	.139	.080	.025	.127	.073	.024	.116	.067	.022	
2.0	.149	.082	.025	.143	.079	.024	.133	.074	.023	.123	.069	.022	.114	.064	.020	
3.0	.140	.075	.022	.135	.072	.022	.126	.068	.021	.118	.065	.020	.110	.061	.019	
4.0	.132	.069	.020	.128	.067	.020	.120	.064	.019	.113	.061	.018	.107	.058	.018	
5.0	.125	.064	.018	.121	.062	.018	.115	.060	.018	.109	.057	.017	.103	.055	.017	
6.0	.119	.059	.017	.115	.058	.017	.110	.056	.016	.104	.054	.016	.099	.052	.016	
7.0	.113	.056	.016	.110	.055	.016	.105	.053	.015	.100	.051	.015	.096	.050	.015	
8.0	.108	.053	.015	.105	.052	.015	.101	.050	.014	.096	.049	.014	.092	.047	.014	
9.0	.103	.050	.014	.101	.049	.014	.097	.048	.014	.093	.047	.013	.089	.045	.013	
10.0	.098	.047	.013	.096	.047	.013	.093	.046	.013	.089	.044	.013	.086	.043	.012	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.173	.161	.150	.148	.138	.129	.101	.095	.089	.058	.055	.052	.019	.018	.017	
2.0	.157	.136	.119	.134	.117	.103	.092	.081	.072	.053	.047	.042	.017	.015	.014	
3.0	.143	.117	.096	.123	.101	.083	.084	.070	.058	.049	.041	.034	.016	.013	.011	
4.0	.132	.102	.079	.113	.088	.069	.078	.061	.049	.045	.036	.029	.014	.012	.009	
5.0	.122	.090	.066	.105	.078	.058	.072	.054	.041	.042	.032	.024	.013	.010	.008	
6.0	.114	.080	.056	.098	.070	.049	.067	.049	.035	.039	.029	.021	.013	.009	.007	
7.0	.106	.072	.049	.092	.063	.042	.063	.044	.030	.037	.026	.018	.012	.008	.006	
8.0	.100	.066	.042	.086	.057	.037	.060	.040	.026	.035	.024	.016	.011	.008	.005	
9.0	.095	.060	.037	.082	.052	.032	.057	.037	.023	.033	.022	.014	.011	.007	.005	
10.0	.090	.056	.033	.078	.048	.029	.054	.034	.021	.031	.020	.012	.010	.007	.004	

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-26

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.1V I:0.0625A P:12.46W PF:0.9049 实检光通:926.763x1 lm										
灯具名称: MQT-LED0412-I2(K)					灯具类型: LED 3000K			灯具重量: N/A		
灯具规格: MQT-LED0412-I2(K)					外型尺寸: 89*87MM			测试编号: 28		
制造厂商: C1					发光口面: 0.075			遮光角: N/A		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	15.1	15.9	15.4	16.1	16.3	15.0	15.7	15.2	15.9	16.1
3H	15.1	15.9	15.4	16.1	16.3	15.0	15.7	15.2	15.9	16.1
4H	15.2	15.9	15.4	16.1	16.3	15.0	15.7	15.2	15.9	16.1
6H	15.2	15.8	15.5	16.1	16.3	15.0	15.6	15.3	15.9	16.1
8H	15.2	15.8	15.5	16.0	16.3	14.9	15.6	15.3	15.8	16.1
12H	15.1	15.7	15.5	16.0	16.3	14.9	15.5	15.2	15.8	16.1
4H 2H	15.0	15.7	15.2	15.9	16.1	14.8	15.5	15.1	15.7	15.9
3H	15.0	15.6	15.4	15.9	16.2	14.9	15.5	15.2	15.7	16.0
4H	15.1	15.6	15.4	15.9	16.3	14.9	15.5	15.3	15.8	16.1
6H	15.1	15.6	15.5	16.0	16.3	14.9	15.4	15.3	15.8	16.1
8H	15.2	15.6	15.6	16.0	16.3	14.9	15.4	15.3	15.7	16.1
12H	15.1	15.6	15.6	15.9	16.3	14.9	15.3	15.3	15.7	16.1
8H 4H	15.0	15.5	15.4	15.8	16.2	14.8	15.3	15.2	15.7	16.0
6H	15.1	15.5	15.6	15.9	16.3	14.9	15.3	15.4	15.7	16.1
8H	15.2	15.5	15.6	15.9	16.4	14.9	15.3	15.4	15.7	16.1
12H	15.2	15.5	15.6	15.9	16.4	14.9	15.2	15.4	15.7	16.1
12H 4H	15.0	15.4	15.4	15.8	16.2	14.8	15.2	15.2	15.6	16.0
6H	15.1	15.4	15.5	15.8	16.3	14.9	15.2	15.3	15.6	16.1
8H	15.1	15.4	15.6	15.9	16.3	14.9	15.2	15.4	15.7	16.1
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 2.1 / - 4.3					+ 2.0 / - 4.6				
1.5H	+ 3.4 / - 4.9					+ 3.5 / - 5.0				
2.0H	+ 5.0 / - 2.8					+ 5.1 / - 2.7				

依据CIE Pub.117计算, 表格已按926.81lm光源光通进行修正 ($81\log(F/F_0) = -0.3$)。

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-26

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:220.1V I:0.0625A P:12.46W PF:0.9049 实检光通:926.763x1 lm		
灯具名称: MQT-LED0412-I2(K)	灯具类型: LED 3000K	灯具重量: N/A
灯具规格: MQT-LED0412-I2(K)	外型尺寸: 89*87MM	测试编号: 28
制造厂商: C1	发光口面: 0.075	遮光角: N/A


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	87	81	77	86	80	77	73
0.80	95	89	85	94	88	85	93	88	85	81
1.00	99	94	90	98	93	90	97	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	105	100	97	102	99	96	92
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	106	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2018-04-26

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具等光强曲线

实测参数: U:220.1V I:0.0625A P:12.46W PF:0.9049 实检光通:926.763x1 lm		
灯具名称: MQT-LED0412-I2(K)	灯具类型: LED 3000K	灯具重量: N/A
灯具规格: MQT-LED0412-I2(K)	外型尺寸: 89*87MM	测试编号: 28
制造厂商: C1	发光口面: 0.075	遮光角: N/A

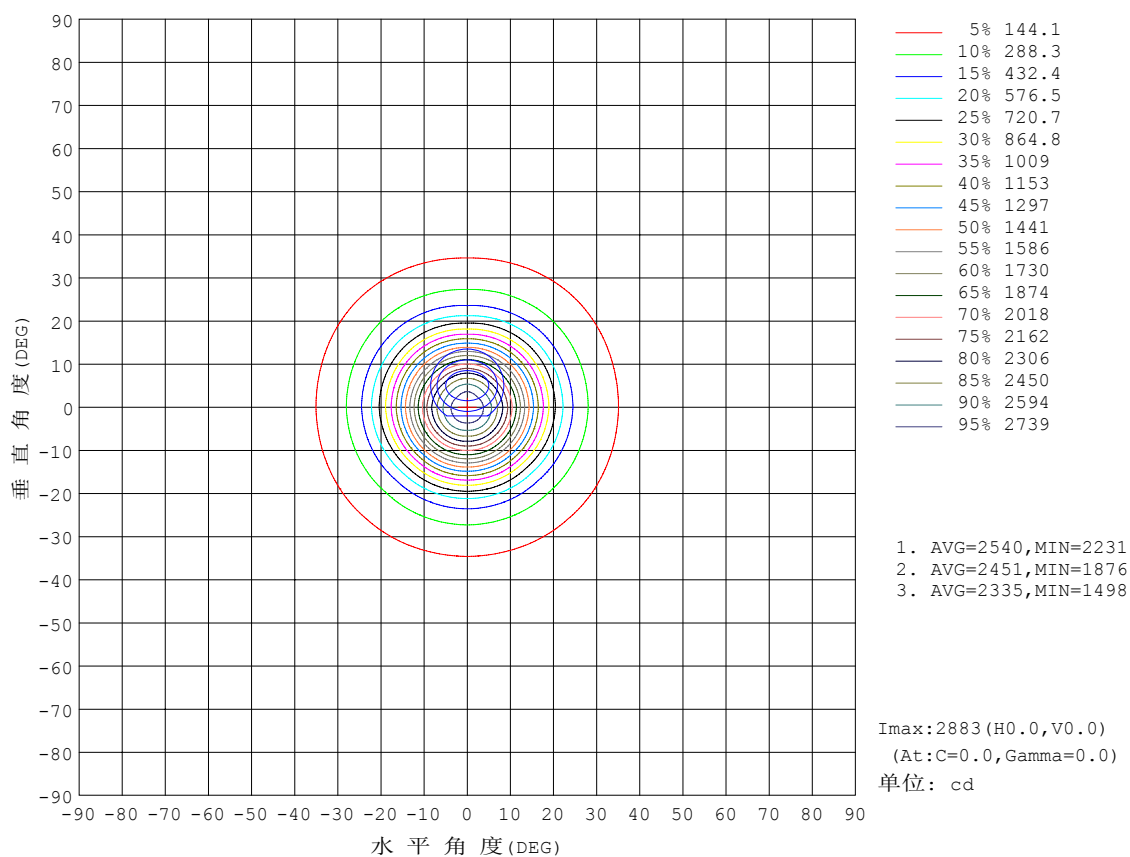


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-26

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:220.1V I:0.0625A P:12.46W PF:0.9049 实检光通:926.763x1 lm		
灯具名称: MQT-LED0412-I2(K)	灯具类型: LED 3000K	灯具重量: N/A
灯具规格: MQT-LED0412-I2(K)	外型尺寸: 89*87MM	测试编号: 28
制造厂商: C1	发光口面: 0.075	遮光角: N/A

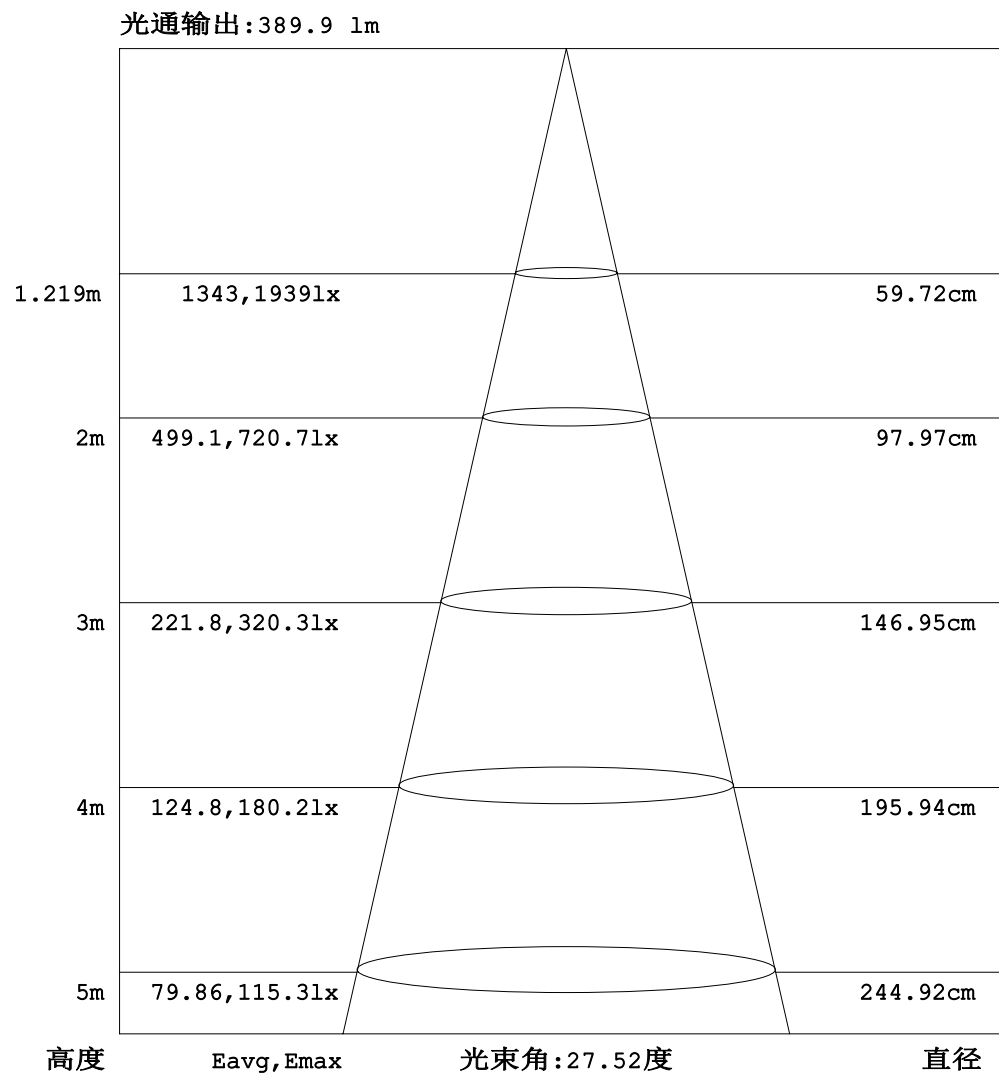


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-26

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:220.1V I:0.0625A P:12.46W PF:0.9049 实检光通:926.763x1 lm		
灯具名称: MQT-LED0412-I2(K)	灯具类型: LED 3000K	灯具重量: N/A
灯具规格: MQT-LED0412-I2(K)	外型尺寸: 89*87MM	测试编号: 28
制造厂商: C1	发光口面: 0.075	遮光角: N/A

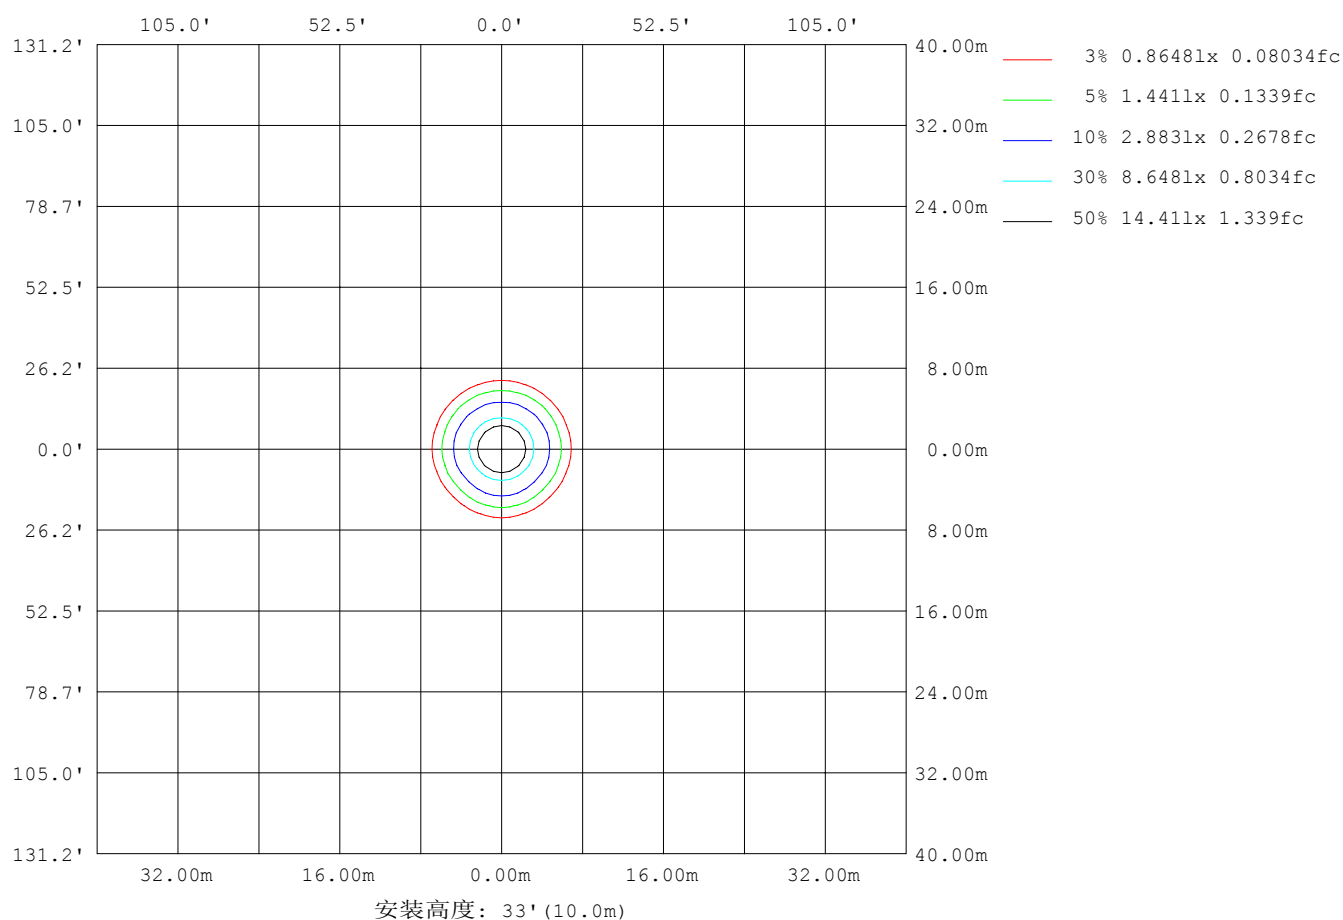

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-26

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.1V I:0.0625A P:12.46W PF:0.9049 实检光通:926.763x1 lm		
灯具名称:MQT-LED0412-I2(K)	灯具类型:LED 3000K	灯具重量:N/A
灯具规格:MQT-LED0412-I2(K)	外型尺寸: 89*87MM	测试编号:28
制造厂商: C1	发光口面:0.075	遮光角:N/A


平均亮度	数值(cd/m2)
L横(65)av	2728
L横(75)av	2651
L横(85)av	2076
L纵(65)av	2716
L纵(75)av	2456
L纵(85)av	1568
L45(65)av	2703
L45(75)av	2543
L45(85)av	1873

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:weijie
测试日期:2018-04-26

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度:65.0%
测试距离:9.490米 [K=1.0000]
备注:

平面照度曲线

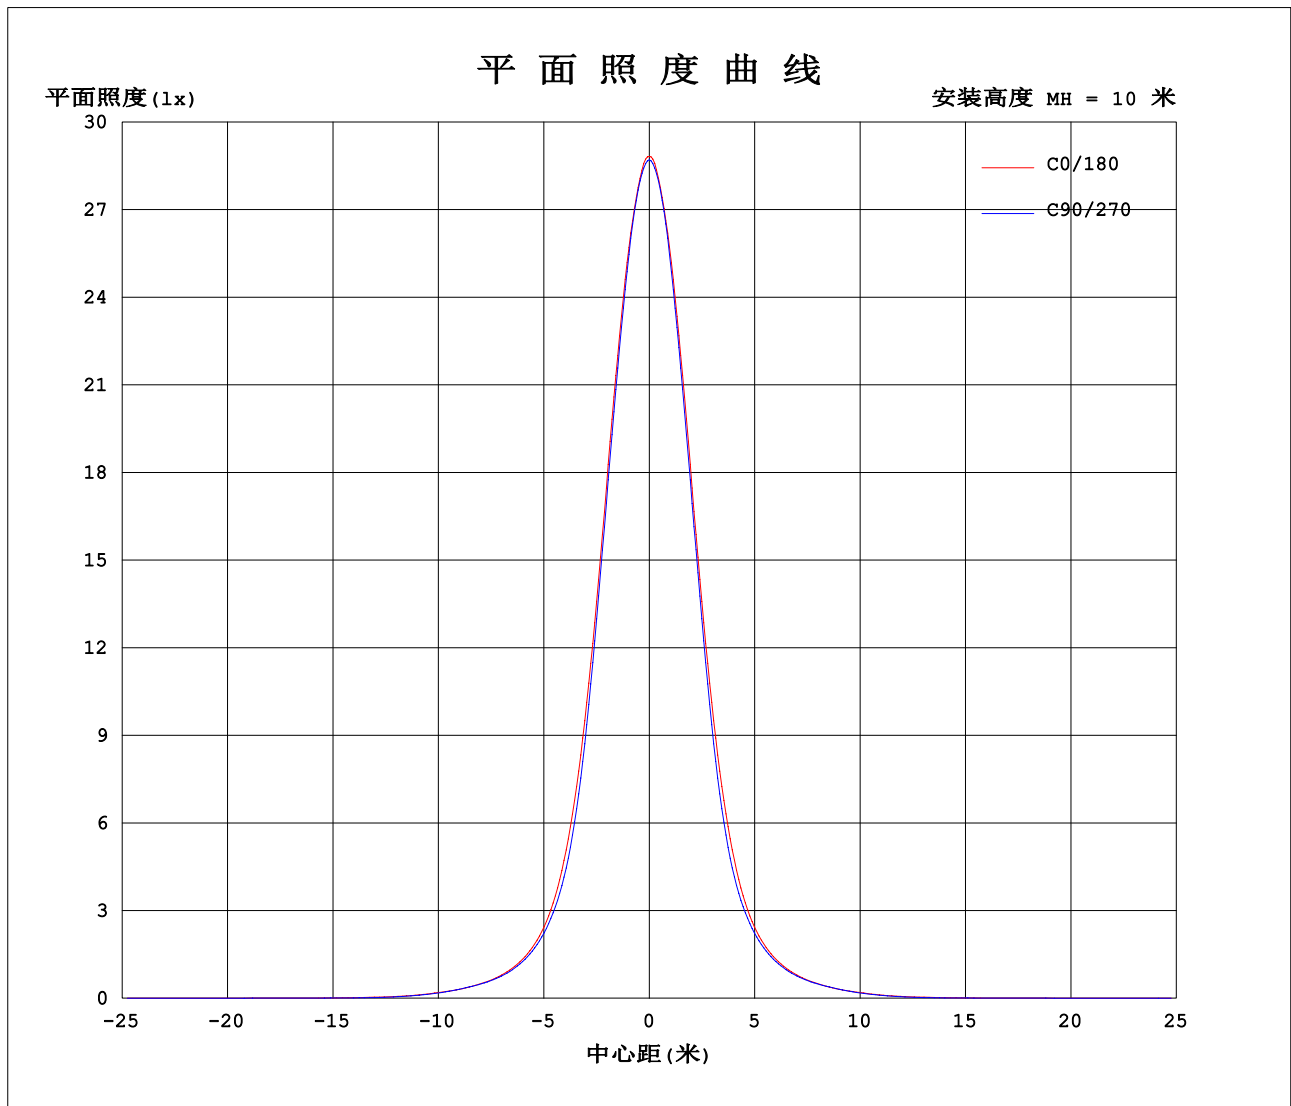

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-04-26

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:220.1V I:0.0625A P:12.46W PF:0.9049 实检光通:926.763x1 lm		
灯具名称: MQT-LED0412-I2(K)	灯具类型: LED 3000K	灯具重量: N/A
灯具规格: MQT-LED0412-I2(K)	外型尺寸: 89*87MM	测试编号: 28
制造厂商: C1	发光口面: 0.075	遮光角: N/A

表--1

单位: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2883	2881	2871	2881	2883	2852	2871	2852										
5	2650	2651	2632	2651	2650	2609	2632	2609										
10	2076	2045	2020	2045	2076	2018	2020	2018										
15	1348	1288	1275	1288	1348	1313	1275	1313										
20	761	677	674	677	761	730	674	730										
25	407	363	368	363	407	395	368	395										
30	235	214	220	214	235	231	220	231										
35	145	136	139	136	145	143	139	143										
40	92.3	89.1	92.2	89.1	92.3	91.7	92.2	91.7										
45	55.8	53.7	52.1	53.7	55.8	56.3	52.1	56.3										
50	25.0	23.3	21.5	23.3	25.0	25.4	21.5	25.4										
55	10.4	7.89	7.43	7.89	10.4	10.1	7.43	10.1										
60	6.13	5.87	5.83	5.87	6.13	5.96	5.83	5.96										
65	5.09	5.12	5.07	5.12	5.09	4.96	5.07	4.96										
70	4.16	4.13	3.99	4.13	4.16	4.01	3.99	4.01										
75	3.03	2.96	2.81	2.96	3.03	2.85	2.81	2.85										
80	1.88	1.80	1.62	1.80	1.88	1.71	1.62	1.71										
85	0.80	0.74	0.60	0.74	0.80	0.70	0.60	0.70										
90	0.20	0.06	0.01	0.06	0.20	0.14	0.01	0.14										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
120	0.00	0.02	0.02	0.02	0.00	0.01	0.02	0.01										
125	0.10	0.07	0.07	0.07	0.10	0.10	0.07	0.10										
130	0.23	0.21	0.21	0.21	0.23	0.22	0.21	0.22										
135	0.45	0.42	0.40	0.42	0.45	0.44	0.40	0.44										
140	0.84	0.76	0.74	0.76	0.84	0.79	0.74	0.79										
145	1.42	1.33	1.31	1.33	1.42	1.35	1.31	1.35										
150	2.18	2.09	2.07	2.09	2.18	2.10	2.07	2.10										
155	3.00	2.96	2.94	2.96	3.00	2.95	2.94	2.95										
160	3.71	3.73	3.75	3.73	3.71	3.70	3.75	3.70										
165	4.13	4.18	4.24	4.18	4.13	4.15	4.24	4.15										
170	4.28	4.29	4.31	4.29	4.28	4.23	4.31	4.23										
175	4.24	4.30	4.22	4.30	4.24	4.27	4.22	4.27										
180	4.38	4.31	4.35	4.31	4.38	4.36	4.35	4.36										

C角度范围: 0度 - 360度

C角度间隔: 45.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: weijie

测试日期: 2018-04-26

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351

环境湿度: 65.0%

测试距离: 9.490米 [K=1.0000]

备注: