
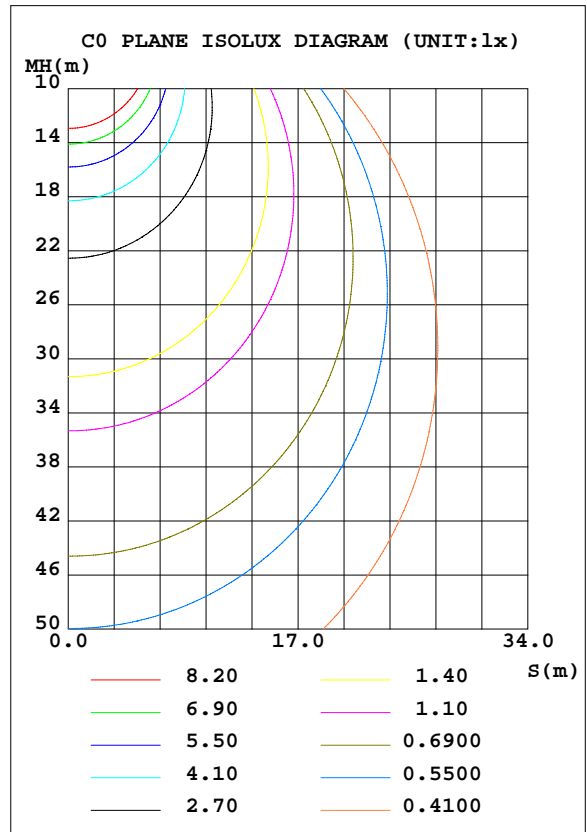


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.0V I:0.1910A P:40.80W PF:0.9712 Lamp Flux:3597.38x1 lm		
NAME: MQG-LED-140H	TYPE:LED	WEIGHT:
SPEC.:MQG-LED-140H	DIM.:	SERIAL No.:1
MFR.: CHONON	SUR.:1.15*0.065	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 88.17 lm/W			
MODEL	s2835.44.NW	Imax(cd)	1372	S/MH(C0/180)	1.21
NOMINAL POWER(W)	40.7985	LOR(%)	100.0	S/MH(C90/270)	1.20
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3597.4	η UP, DN(C0-180)	0.3,49.5
NOMINAL FLUX(lm)	3597.38	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.3,50.0
LAMPS INSIDE	1	η up(%)	0.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220.1	η down(%)	99.5	CIBSE SHR MAX	1.35

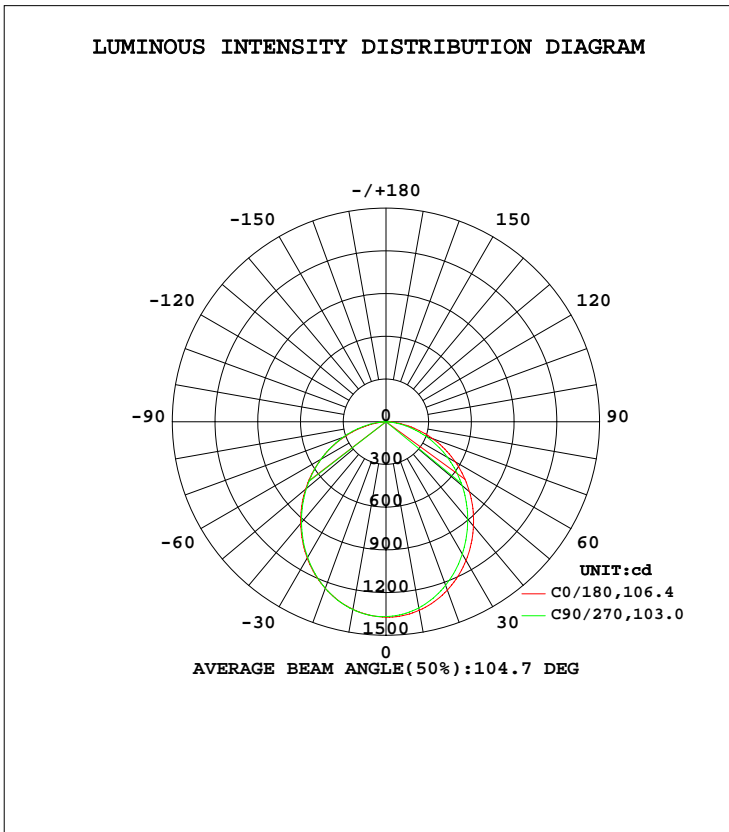

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:weijie
 Test Date:2016-04-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.490m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1345	1337	1327	1328	1338	1338	1339	1340	0- 10	129.1	129.1	3.59,3.59
20	1259	1242	1223	1228	1246	1244	1245	1253	10- 20	365.4	494.5	13.7,13.7
30	1125	1101	1072	1082	1106	1101	1100	1115	20- 30	541.7	1036	28.8,28.8
40	956.0	926.2	892.5	905.1	932.1	924.3	923.6	943.0	30- 40	635.3	1671	46.5,46.5
50	765.5	734.0	698.6	710.6	737.0	728.7	729.5	751.3	40- 50	640.4	2312	64.3,64.3
60	561.5	531.2	497.6	505.2	528.7	523.1	527.6	548.8	50- 60	563.8	2876	79.9,79.9
70	349.8	325.8	295.6	297.9	313.0	312.8	323.0	341.2	60- 70	419.4	3295	91.6,91.6
80	144.0	129.1	109.2	104.0	108.1	115.3	130.3	141.8	70- 80	230.9	3526	98,98
90	3.311	1.543	0.6388	0.7093	0.6829	0.6320	1.561	3.575	80- 90	53.21	3579	99.5,99.5
100	1.227	1.191	1.121	1.297	1.318	1.163	1.059	1.036	90-100	1.006	3580	99.5,99.5
110	2.031	1.921	1.819	2.037	2.096	1.877	1.726	1.745	100-110	1.618	3582	99.6,99.6
120	2.861	2.725	2.586	2.799	2.916	2.623	2.487	2.497	110-120	2.268	3584	99.6,99.6
130	3.660	3.519	3.343	3.551	3.710	3.428	3.276	3.279	120-130	2.757	3587	99.7,99.7
140	4.385	4.429	4.089	4.265	4.408	4.279	4.043	4.152	130-140	2.976	3590	99.8,99.8
150	4.973	5.075	4.925	5.017	5.075	5.047	4.943	5.189	140-150	2.910	3593	99.9,99.9
160	5.497	5.624	5.618	5.767	5.619	5.751	5.815	5.703	150-160	2.503	3595	99.9,99.9
170	5.872	5.873	5.983	5.899	6.005	5.968	6.074	5.904	160-170	1.643	3597	100,100
180	6.169	6.095	6.254	6.031	6.180	6.084	6.259	6.016	170-180	0.5730	3597	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1996.4 lm

%lum = 55.5%
%lamp = 55.5%

Conical surface Flux(120deg): 2875.6 lm


%lum = 79.9%
%lamp = 79.9%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:weijie
Test Date:2016-04-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:9.490m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.0V I:0.1910A P:40.80W PF:0.9712 Lamp Flux:3597.38x1 lm		
NAME: MQG-LED-140H	TYPE:LED	WEIGHT:
SPEC.:MQG-LED-140H	DIM.:	SERIAL No.:1
MFR.: CHONON	SUR.:1.15*0.065	Shielding Angle:

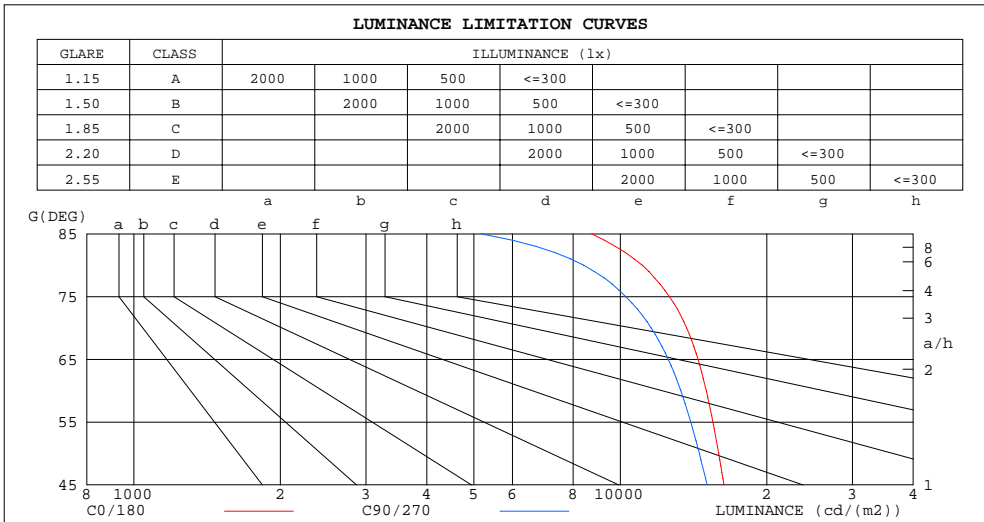

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	8734	5173
80	11092	8411
75	12612	10258
70	13681	11564
65	14447	12546
60	15023	13314
55	15501	13957
50	15932	14539
45	16325	15074


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:weijie
 Test Date:2016-04-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.490m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.0V I:0.1910A P:40.80W PF:0.9712 Lamp Flux:3597.38x1 lm		
NAME: MQG-LED-140H	TYPE:LED	WEIGHT:
SPEC.:MQG-LED-140H	DIM.:	SERIAL No.:1
MFR.: CHONON	SUR.:1.15*0.065	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.99
1.0	1.04	1.00	.96	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.79	.89	.83	.78	.86	.80	.76	.82	.78	.74	.79	.76	.72	.70
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.67	.63	.70	.66	.62	.59
4.0	.71	.63	.56	.70	.62	.55	.67	.60	.55	.65	.59	.54	.63	.57	.53	.51
5.0	.64	.55	.48	.63	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.46	.44
6.0	.57	.49	.42	.56	.48	.42	.55	.47	.42	.53	.46	.41	.51	.45	.41	.39
7.0	.52	.43	.37	.51	.43	.37	.50	.42	.37	.48	.42	.37	.47	.41	.36	.34
8.0	.48	.39	.33	.47	.39	.33	.46	.38	.33	.44	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.30	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.29	.28
10.0	.40	.33	.27	.40	.32	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

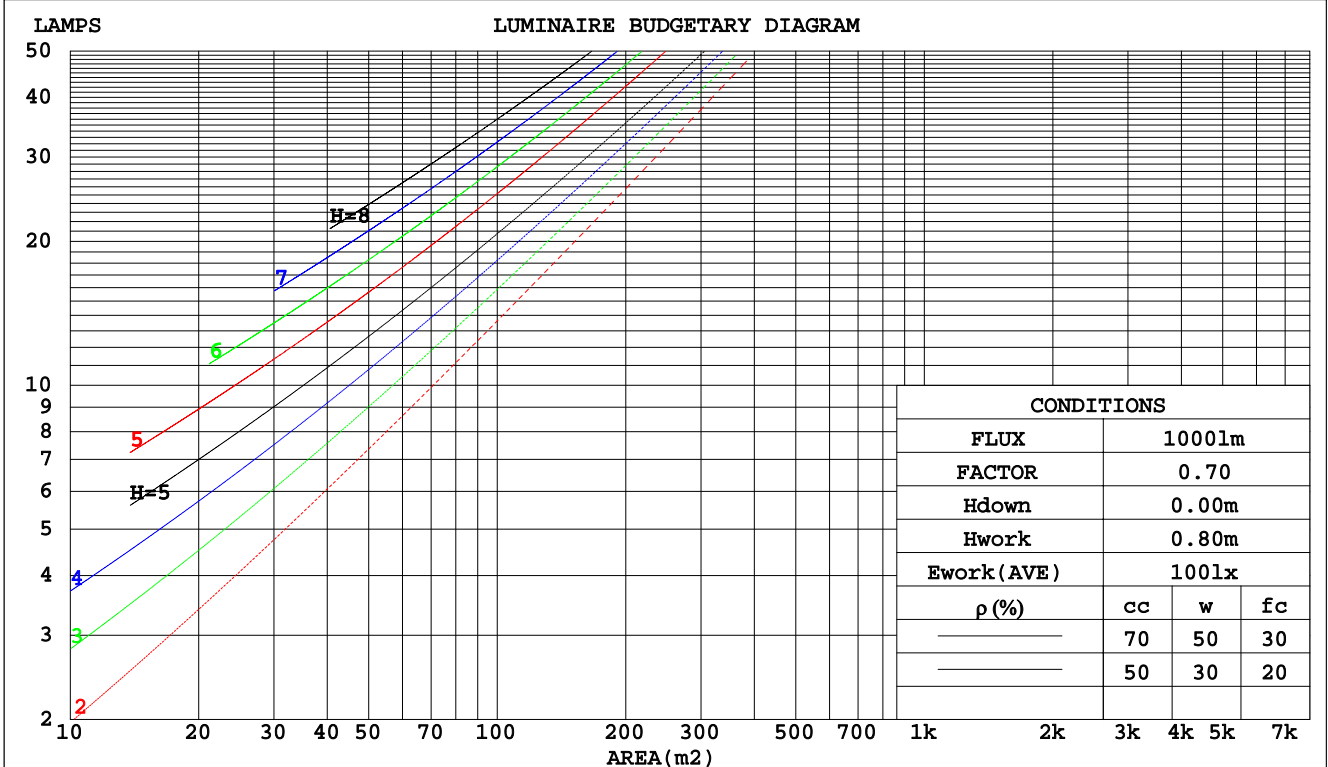

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:weijie
 Test Date:2016-04-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.490m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.0V I:0.1910A P:40.80W PF:0.9712 Lamp Flux:3597.38x1 lm		
NAME: MQG-LED-140H	TYPE:LED	WEIGHT:
SPEC.:MQG-LED-140H	DIM.:	SERIAL No.:1
MFR.: CHONON	SUR.:1.15*0.065	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.300	.170	.054	.292	.167	.053	.279	.160	.051	.267	.154	.049	.255	.148	.048	
2.0	.284	.156	.048	.278	.153	.047	.266	.148	.046	.255	.143	.045	.245	.138	.044	
3.0	.264	.140	.042	.258	.138	.042	.248	.134	.041	.238	.130	.040	.229	.127	.039	
4.0	.244	.127	.037	.239	.125	.037	.230	.122	.036	.221	.119	.036	.213	.116	.035	
5.0	.226	.115	.033	.222	.114	.033	.213	.111	.033	.206	.109	.032	.198	.106	.032	
6.0	.210	.105	.030	.206	.104	.030	.199	.102	.030	.192	.100	.029	.185	.098	.029	
7.0	.196	.097	.027	.192	.096	.027	.186	.094	.027	.179	.092	.027	.174	.090	.027	
8.0	.183	.089	.025	.180	.089	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024	
9.0	.172	.083	.023	.169	.082	.023	.164	.081	.023	.159	.079	.023	.154	.078	.023	
10.0	.162	.077	.022	.159	.077	.021	.154	.076	.021	.150	.074	.021	.145	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.183	.160	.139	.157	.137	.120	.107	.095	.083	.062	.055	.048	.020	.018	.016	
2.0	.175	.136	.103	.150	.117	.089	.103	.081	.062	.059	.047	.036	.019	.015	.012	
3.0	.167	.118	.079	.143	.102	.069	.098	.071	.048	.057	.041	.028	.018	.013	.009	
4.0	.160	.105	.063	.137	.091	.055	.094	.063	.039	.054	.037	.023	.018	.012	.008	
5.0	.152	.094	.052	.131	.082	.045	.090	.057	.032	.052	.033	.019	.017	.011	.006	
6.0	.145	.086	.044	.125	.074	.038	.086	.052	.027	.050	.031	.016	.016	.010	.005	
7.0	.138	.079	.038	.119	.069	.033	.082	.048	.023	.048	.028	.014	.015	.009	.005	
8.0	.132	.073	.033	.114	.064	.029	.079	.045	.020	.046	.026	.012	.015	.009	.004	
9.0	.126	.068	.029	.108	.059	.026	.075	.042	.018	.044	.025	.011	.014	.008	.004	
10.0	.120	.064	.027	.104	.056	.023	.072	.039	.017	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:weijie
 Test Date:2016-04-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.490m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.0V I:0.1910A P:40.80W PF:0.9712 Lamp Flux:3597.38x1 lm										
NAME: MQG-LED-140H					TYPE:LED			WEIGHT:		
SPEC.:MQG-LED-140H					DIM.:			SERIAL No.:1		
MFR.: CHONON					SUR.:1.15*0.065			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.3	23.8	22.6	24.0	24.3	21.9	23.4	22.2	23.6	23.8
3H	23.9	25.2	24.2	25.5	25.7	23.3	24.6	23.6	24.9	25.1
4H	24.5	25.8	24.8	26.0	26.3	23.8	25.1	24.1	25.3	25.6
6H	24.9	26.1	25.2	26.4	26.7	24.1	25.3	24.4	25.6	25.9
8H	25.0	26.2	25.3	26.5	26.8	24.2	25.4	24.5	25.6	25.9
12H	25.1	26.2	25.4	26.5	26.8	24.2	25.3	24.5	25.6	25.9
4H 2H	22.9	24.2	23.2	24.4	24.7	22.5	23.9	22.9	24.1	24.4
3H	24.6	25.7	24.9	26.0	26.3	24.1	25.2	24.5	25.5	25.9
4H	25.3	26.3	25.7	26.7	27.0	24.7	25.8	25.1	26.1	26.4
6H	25.8	26.8	26.2	27.1	27.5	25.1	26.1	25.6	26.4	26.8
8H	26.0	26.9	26.4	27.2	27.6	25.3	26.1	25.7	26.5	26.9
12H	26.1	26.9	26.5	27.3	27.7	25.3	26.1	25.7	26.5	26.9
8H 4H	25.5	26.4	25.9	26.8	27.1	25.0	25.9	25.4	26.2	26.6
6H	26.2	26.9	26.6	27.3	27.8	25.6	26.3	26.0	26.7	27.1
8H	26.4	27.1	26.9	27.5	28.0	25.7	26.4	26.2	26.8	27.3
12H	26.6	27.1	27.1	27.6	28.1	25.8	26.4	26.3	26.8	27.3
12H 4H	25.5	26.3	25.9	26.7	27.1	25.0	25.8	25.4	26.2	26.6
6H	26.2	26.9	26.7	27.3	27.8	25.6	26.2	26.1	26.7	27.1
8H	26.5	27.0	27.0	27.5	28.0	25.8	26.4	26.3	26.8	27.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 3597 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.4)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:weijie
 Test Date:2016-04-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.490m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.0V I:0.1910A P:40.80W PF:0.9712 Lamp Flux:3597.38x1 lm		
NAME: MQG-LED-140H	TYPE:LED	WEIGHT:
SPEC.:MQG-LED-140H	DIM.:	SERIAL No.:1
MFR.: CHONON	SUR.:1.15*0.065	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	57	50	68	57	50	66	56	49	43
1.00	77	66	59	76	65	59	73	67	58	51
1.25	84	74	67	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	77	71	63
2.00	96	87	81	94	86	80	90	84	79	71
2.50	99	92	86	97	90	85	93	88	83	75
3.00	103	96	91	100	94	90	96	91	87	79
4.00	107	101	97	104	99	95	100	96	92	83
5.00	109	104	100	106	102	99	102	99	96	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:weijie
 Test Date:2016-04-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.490m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.0V I:0.1910A P:40.80W PF:0.9712 Lamp Flux:3597.38x1 lm		
NAME: MQG-LED-140H	TYPE:LED	WEIGHT:
SPEC.:MQG-LED-140H	DIM.:	SERIAL No.:1
MFR.: CHONON	SUR.:1.15*0.065	Shielding Angle:

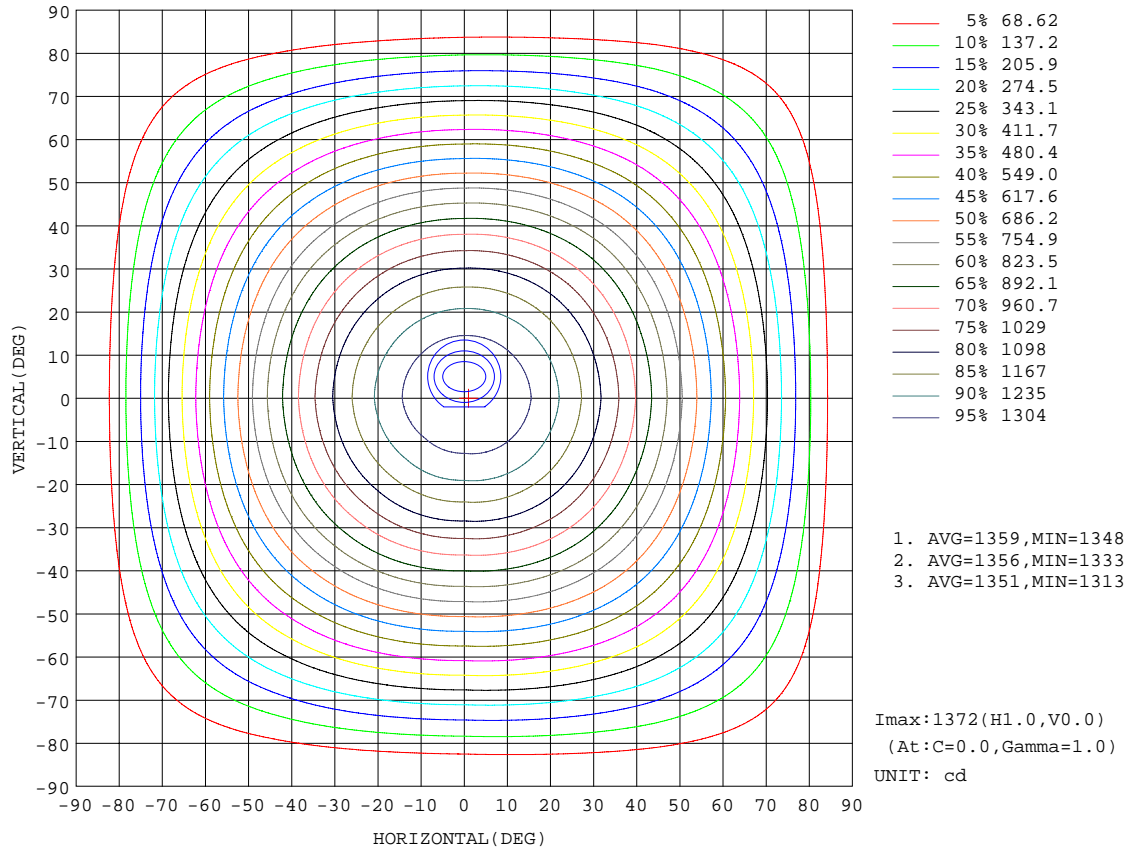


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:weijie
 Test Date:2016-04-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.490m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.0V I:0.1910A P:40.80W PF:0.9712 Lamp Flux:3597.38x1 lm		
NAME: MQG-LED-140H	TYPE:LED	WEIGHT:
SPEC.:MQG-LED-140H	DIM.:	SERIAL No.:1
MFR.: CHONON	SUR.:1.15*0.065	Shielding Angle:

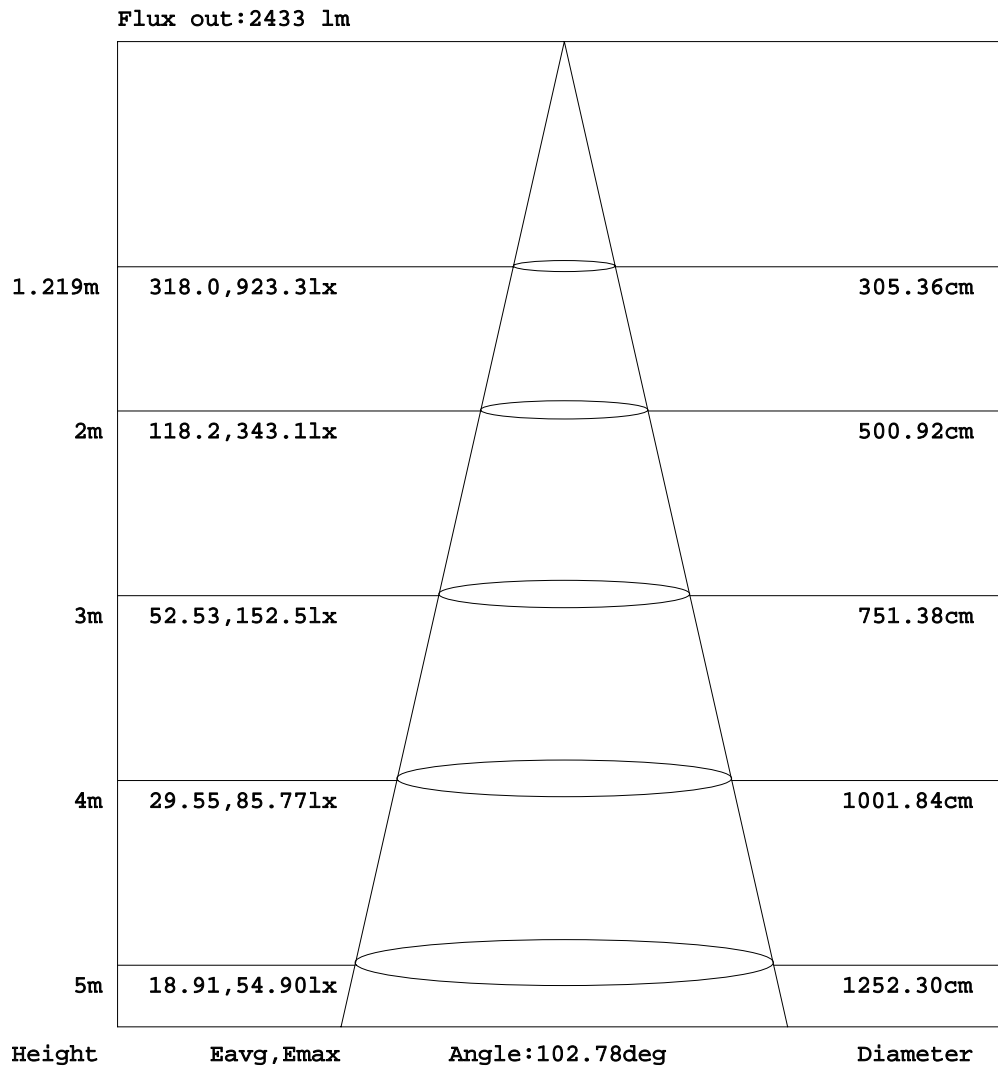


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:weijie
 Test Date:2016-04-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.490m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.0V I:0.1910A P:40.80W PF:0.9712 Lamp Flux:3597.38x1 lm		
NAME: MQG-LED-140H	TYPE:LED	WEIGHT:
SPEC.:MQG-LED-140H	DIM.:	SERIAL No.:1
MFR.: CHONON	SUR.:1.15*0.065	Shielding Angle:

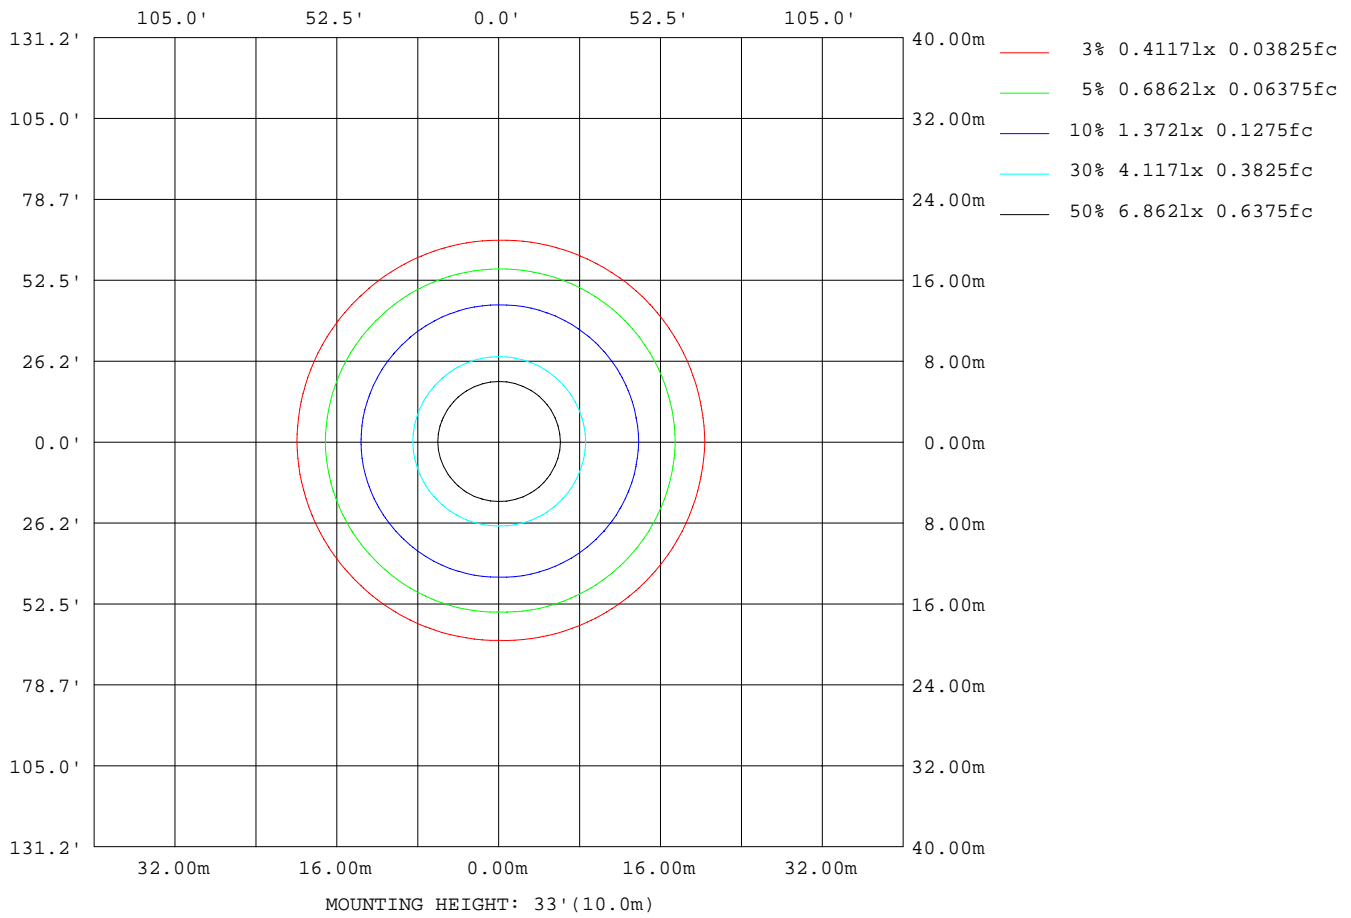

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:weijie
 Test Date:2016-04-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.490m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.0V I:0.1910A P:40.80W PF:0.9712 Lamp Flux:3597.38x1 lm		
NAME: MQG-LED-140H	TYPE:LED	WEIGHT:
SPEC.:MQG-LED-140H	DIM.:	SERIAL No.:1
MFR.: CHONON	SUR.:1.15*0.065	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	13890
L_0~180(75)av	11649
L_0~180(85)av	6643
L_90~270(65)av	13001
L_90~270(75)av	10910
L_90~270(85)av	6374
L_45(65)av	13399
L_45(75)av	11245
L_45(85)av	6527

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:weijie
 Test Date:2016-04-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.490m [K=1.0000]
 Remarks:

Planar Illuminance Curve

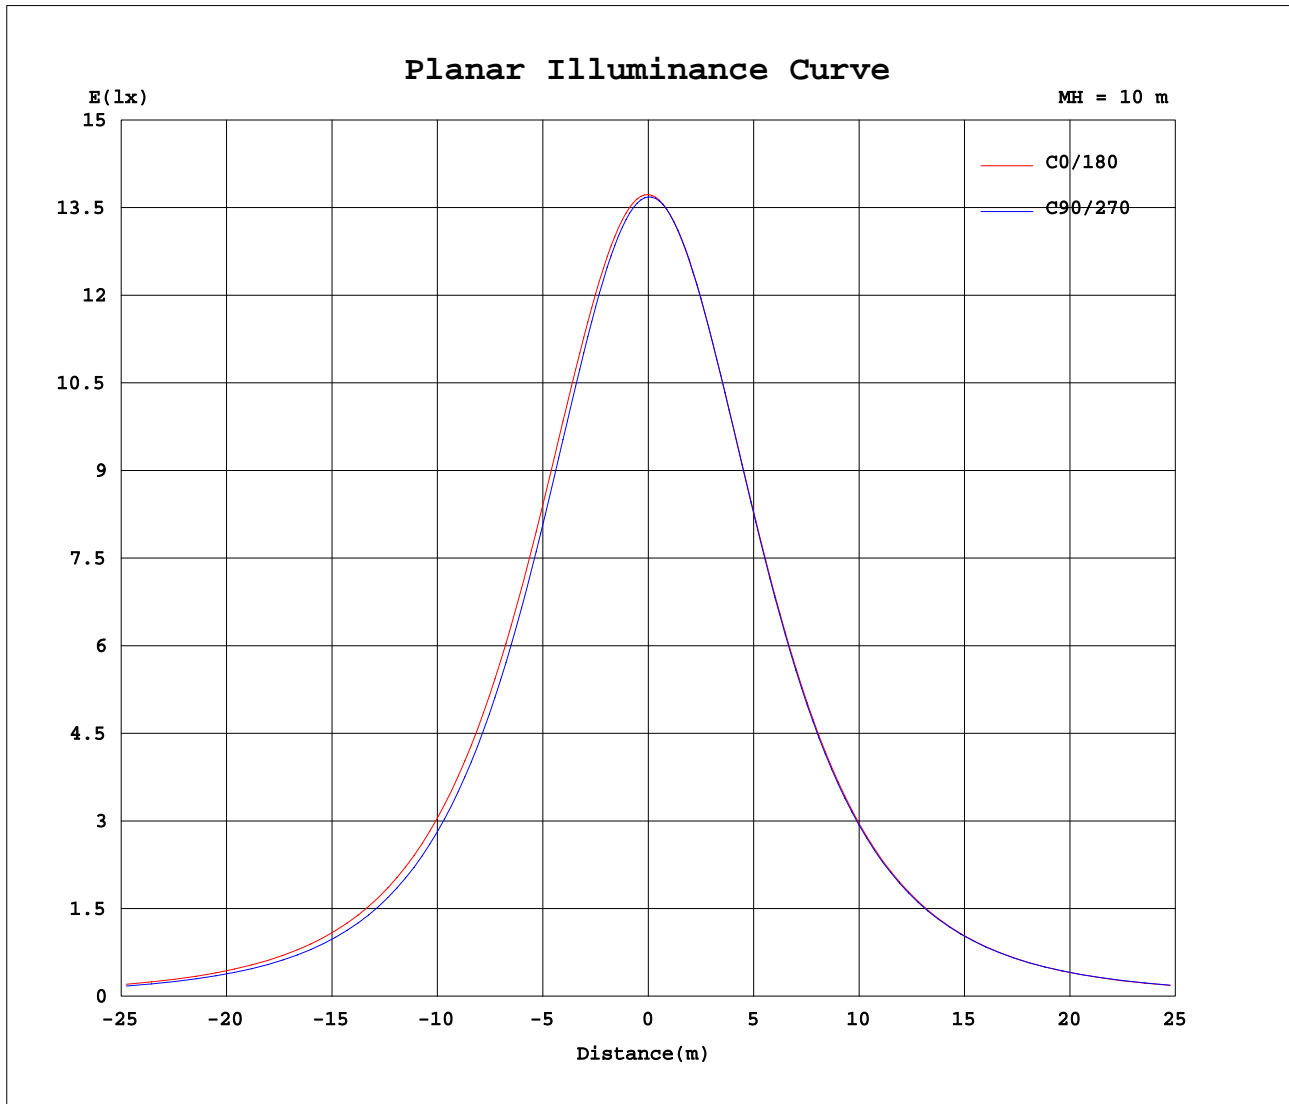

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: weijie
 Test Date: 2016-04-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 9.490m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.0V I:0.1910A P:40.80W PF:0.9712 Lamp Flux:3597.38x1 lm		
NAME: MQG-LED-140H	TYPE:LED	WEIGHT:
SPEC.:MQG-LED-140H	DIM.:	SERIAL No.:1
MFR.: CHONON	SUR.:1.15*0.065	Shielding Angle:

Table--1

UNIT: cd

C(DEG)\ γ (DEG)	0	45	90	135	180	225	270	315											
0	1372	1370	1368	1367	1372	1370	1368	1367											
5	1366	1362	1356	1355	1363	1362	1363	1362											
10	1345	1337	1327	1328	1338	1338	1339	1340											
15	1309	1296	1282	1285	1298	1297	1300	1304											
20	1259	1242	1223	1228	1246	1244	1245	1253											
25	1197	1176	1152	1160	1181	1177	1178	1189											
30	1125	1101	1072	1082	1106	1101	1100	1115											
35	1044	1016	985	997	1022	1015	1015	1032											
40	956	926	893	905	932	924	924	943											
45	863	831	797	809	836	828	828	849											
50	766	734	699	711	737	729	730	751											
55	665	634	598	609	634	627	629	651											
60	561	531	498	505	529	523	528	549											
65	456	428	396	401	421	418	425	445											
70	350	326	296	298	313	313	323	341											
75	244	225	198	197	207	210	224	239											
80	144	129	109	104	108	115	130	142											
85	56.9	47.6	33.7	28.5	29.7	36.4	49.4	57.6											
90	3.31	1.54	0.64	0.71	0.68	0.63	1.56	3.57											
95	0.87	0.88	0.82	0.97	0.97	0.83	0.78	0.74											
100	1.23	1.19	1.12	1.30	1.32	1.16	1.06	1.04											
105	1.61	1.55	1.45	1.66	1.69	1.51	1.38	1.38											
110	2.03	1.92	1.82	2.04	2.10	1.88	1.73	1.75											
115	2.46	2.32	2.19	2.39	2.47	2.25	2.09	2.11											
120	2.86	2.73	2.59	2.80	2.92	2.62	2.49	2.50											
125	3.28	3.12	2.97	3.17	3.32	3.03	2.88	2.89											
130	3.66	3.52	3.34	3.55	3.71	3.43	3.28	3.28											
135	4.03	3.93	3.71	3.89	4.07	3.82	3.65	3.69											
140	4.38	4.43	4.09	4.27	4.41	4.28	4.04	4.15											
145	4.72	4.74	4.46	4.64	4.77	4.62	4.44	4.68											
150	4.97	5.07	4.92	5.02	5.07	5.05	4.94	5.19											
155	5.26	5.35	5.30	5.72	5.36	5.72	5.40	5.56											
160	5.50	5.62	5.62	5.77	5.62	5.75	5.82	5.70											
165	5.71	5.78	5.77	5.91	5.83	5.86	5.85	5.76											
170	5.87	5.87	5.98	5.90	6.01	5.97	6.07	5.90											
175	6.00	5.97	6.05	5.95	6.11	5.99	6.17	5.95											
180	6.17	6.09	6.25	6.03	6.18	6.08	6.26	6.02											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:weijie
 Test Date:2016-04-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.490m [K=1.0000]
 Remarks: