


室内灯具光度数据


实测参数: U:220.1V I:0.1801A P:38.10W PF:0.9610 实检光通:3352.6x1 lm		
灯具名称: MQG-LED40G2	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED40G2	外型尺寸: 1200*246*10mm	测试编号: 4
制造厂商: CL	发光口面: 1.195*0.23	遮光角: N/A

光源数据		光度数据				光效: 87.98 lm/W
型号	6*J2835.30	峰值光强(cd)	1609	S/MH(C0/180)	1.20	
标称功率(W)	38.1042	灯具效率(%)	100.0	S/MH(C90/270)	1.24	
额定电源电压(V)	220	总光通量(lm)	3352.6	η UP, DN(C0-180)	0.2, 49.3	
额定光通量(lm)	3352.6	CIE分类	直接	η UP, DN(C180-360)	0.2, 50.3	
灯具内光源数(只)	1	上射光通比(%)	0.4	CIBSE SHR NOM	1.25	
实测电源电压(V)	220.1	下射光通比(%)	99.6	CIBSE SHR MAX	1.30	

室内灯具配光曲线

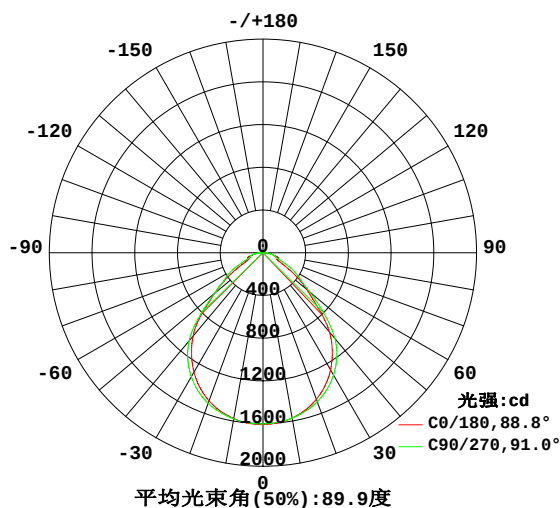

空间等照度曲线(单位: lx)

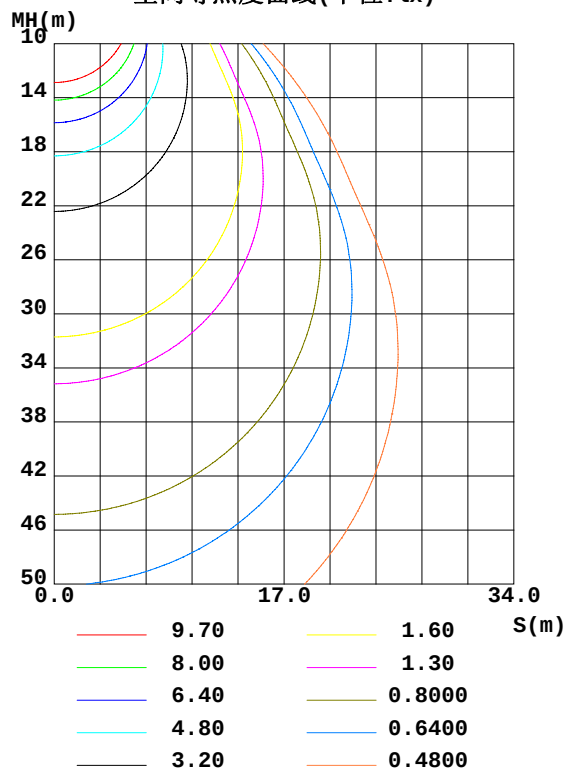

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-12-29

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
5	1599	1603	1594	1591	1601	1592	1598	1605	0- 5	38.30	38.30	1.14, 1.14
10	1572	1586	1572	1561	1577	1563	1580	1589	5- 10	113.5	151.8	4.53, 4.53
15	1526	1553	1536	1516	1536	1519	1547	1556	10- 15	184.6	336.4	10, 10
20	1461	1503	1485	1453	1477	1458	1500	1506	15- 20	248.7	585.0	17.4, 17.4
25	1375	1433	1414	1367	1395	1374	1432	1437	20- 25	302.5	887.5	26.5, 26.5
30	1265	1342	1322	1261	1293	1266	1342	1346	25- 30	342.8	1230	36.7, 36.7
35	1133	1227	1204	1128	1167	1134	1227	1228	30- 35	366.2	1597	47.6, 47.6
40	967.8	1082	1047	956.2	1018	963.5	1076	1084	35- 40	368.9	1965	58.6, 58.6
45	730.7	881.8	814.2	699.3	812.9	719.8	842.2	873.7	40- 45	339.0	2304	68.7, 68.7
50	538.6	639.8	572.9	508.9	594.5	527.4	593.2	634.9	45- 50	274.0	2578	76.9, 76.9
55	372.3	482.6	420.0	386.2	415.2	390.1	439.4	479.0	50- 55	215.2	2794	83.3, 83.3
60	210.5	343.6	324.5	282.3	245.2	279.9	340.0	346.1	55- 60	165.5	2959	88.3, 88.3
65	147.4	244.8	209.8	203.6	153.1	209.6	213.2	251.0	60- 65	119.5	3079	91.8, 91.8
70	151.3	184.8	132.9	147.9	154.3	153.1	131.0	191.7	65- 70	89.73	3168	94.5, 94.5
75	123.0	128.8	116.6	92.71	129.5	95.10	123.5	133.4	70- 75	71.84	3240	96.6, 96.6
80	85.31	83.41	78.01	65.96	90.37	68.45	85.26	85.23	75- 80	52.33	3293	98.2, 98.2
85	37.78	55.32	41.56	27.04	48.17	26.64	46.82	55.00	80- 85	33.98	3327	99.2, 99.2
90	0.3159	10.51	0.3934	0.3124	2.778	0.2857	2.061	9.600	85- 90	11.27	3338	99.6, 99.6
95	0.3488	0.3704	0.4596	0.4553	0.3653	0.4016	0.4342	0.3067	90- 95	0.3920	3338	99.6, 99.6
100	0.4972	0.5241	0.6979	0.6510	0.4924	0.5764	0.6352	0.4441	95-100	0.2569	3338	99.6, 99.6
105	0.7396	0.7465	1.020	0.9160	0.6831	0.8355	0.8949	0.6610	100-105	0.3643	3339	99.6, 99.6
110	1.005	1.053	1.412	1.265	0.9160	1.163	1.228	0.9308	105-110	0.5015	3339	99.6, 99.6
115	1.406	1.429	1.872	1.689	1.250	1.565	1.631	1.296	110-115	0.6646	3340	99.6, 99.6
120	1.851	1.874	2.348	2.170	1.673	2.020	2.075	1.734	115-120	0.8453	3341	99.6, 99.6
125	2.316	2.350	2.824	2.641	2.117	2.459	2.535	2.211	120-125	1.017	3342	99.7, 99.7
130	2.782	2.816	3.290	3.075	2.594	2.877	3.001	2.687	125-130	1.157	3343	99.7, 99.7
135	3.216	3.249	3.724	3.508	3.032	3.274	3.451	3.131	130-135	1.255	3344	99.8, 99.8
140	3.628	3.699	4.148	3.905	3.435	3.687	3.895	3.570	135-140	1.309	3346	99.8, 99.8
145	4.062	4.149	4.544	4.270	3.869	4.084	4.302	4.036	140-145	1.319	3347	99.8, 99.8
150	4.512	4.593	4.898	4.636	4.324	4.486	4.709	4.486	145-150	1.286	3348	99.9, 99.9
155	4.983	4.995	5.195	5.000	4.779	4.888	5.043	4.909	150-155	1.209	3349	99.9, 99.9
160	5.406	5.323	5.433	5.312	5.244	5.216	5.307	5.290	155-160	1.079	3350	99.9, 99.9
165	5.782	5.603	5.624	5.561	5.651	5.497	5.550	5.581	160-165	0.8998	3351	100, 100
170	6.052	5.788	5.761	5.751	5.974	5.740	5.725	5.798	165-170	0.6780	3352	100, 100
175	6.201	5.910	5.872	5.894	6.190	5.899	5.862	5.941	170-175	0.4217	3352	100, 100
180	6.211	5.957	5.941	6.016	6.217	5.957	5.941	6.016	175-180	0.1434	3353	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 2304.4 lm

%lum = 68.7%

%lamp = 68.7%

锥面光通量(120度): 2959.1 lm

%lum = 88.3%


%lamp = 88.3%

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2018-12-29

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具亮度限制曲线

实测参数: U:220.1V I:0.1801A P:38.10W PF:0.9610 实检光通:3352.6x1 lm		
灯具名称: MQG-LED40G2	灯具类型:LED 4000K	灯具重量:N/A
灯具规格:MQG-LED40G2	外型尺寸: 1200*246*10mm	测试编号:4
制造厂商: CL	发光口面:1.195*0.23	遮光角:N/A

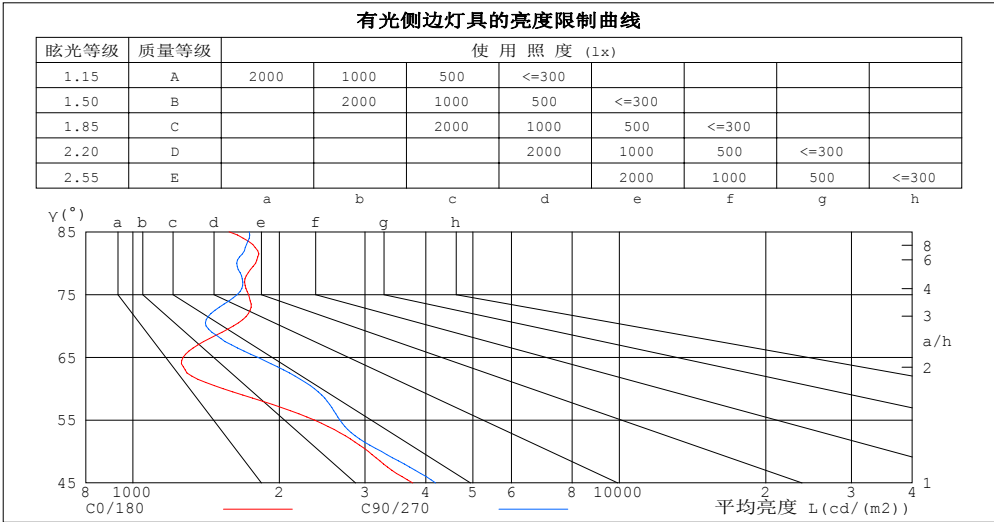

平均亮度值 cd/(m2)		
γ(°)	C0/180	C90/270
85	1577	1735
80	1787	1635
75	1729	1639
70	1609	1414
65	1269	1806
60	1532	2361
55	2362	2664
50	3048	3243
45	3760	4189


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度:25.3℃
测试人员:weijie
测试日期:2018-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度:65.0%
测试距离:9.490米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:220.1V I:0.1801A P:38.10W PF:0.9610 实检光通:3352.6x1 lm		
灯具名称: MQG-LED40G2	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED40G2	外型尺寸: 1200*246*10mm	测试编号: 4
制造厂商: CL	发光口面: 1.195*0.23	遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.03	.99	1.04	1.01	.98	.00	.97	.94	.96	.94	.92	.92	.90	.89	.87
2.0	.95	.89	.84	.93	.87	.83	.89	.85	.81	.86	.82	.79	.83	.80	.77	.75
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.69	.63	.75	.68	.62	.73	.66	.61	.70	.65	.61	.68	.64	.60	.58
5.0	.69	.61	.55	.68	.61	.55	.66	.59	.54	.64	.58	.54	.62	.57	.53	.51
6.0	.63	.55	.49	.62	.54	.49	.60	.54	.48	.59	.53	.48	.57	.52	.48	.46
7.0	.58	.50	.44	.57	.49	.44	.55	.49	.44	.54	.48	.43	.53	.47	.43	.41
8.0	.53	.45	.40	.52	.45	.40	.51	.44	.39	.50	.44	.39	.49	.43	.39	.37
9.0	.49	.41	.36	.48	.41	.36	.47	.41	.36	.46	.40	.36	.45	.40	.35	.34
10.0	.45	.38	.33	.45	.38	.33	.44	.37	.33	.43	.37	.33	.42	.37	.33	.31

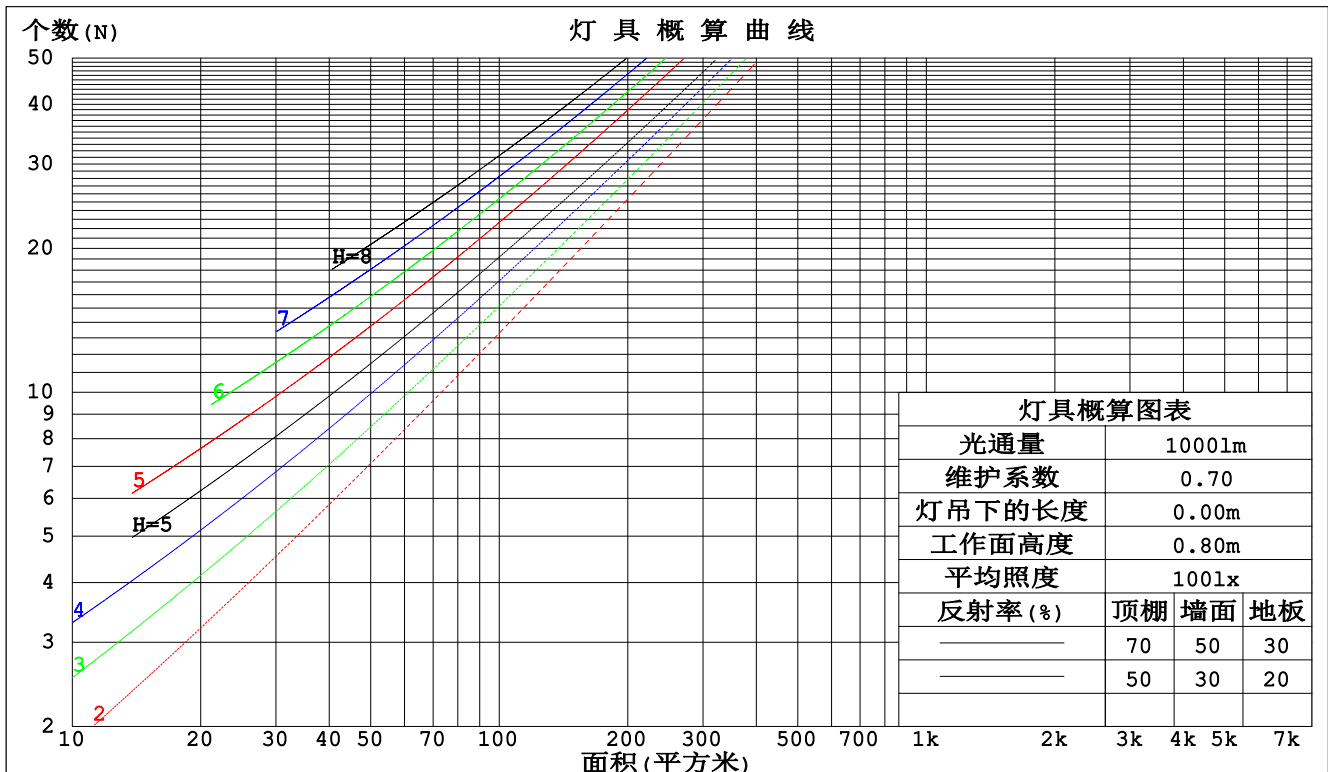

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2018-12-29

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

墙面和天花板利用系数

实测参数: U:220.1V I:0.1801A P:38.10W PF:0.9610 实检光通:3352.6x1 lm					
灯具名称: MQG-LED40G2			灯具类型: LED 4000K		灯具重量: N/A
灯具规格: MQG-LED40G2			外型尺寸: 1200*246*10mm		测试编号: 4
制造厂商: CL			发光口面: 1.195*0.23		遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.263	.150	.047	.256	.146	.046	.243	.139	.044	.230	.133	.043	.219	.127	.041	
2.0	.250	.137	.042	.243	.134	.041	.232	.129	.040	.221	.124	.039	.211	.120	.038	
3.0	.234	.125	.037	.229	.122	.037	.219	.118	.036	.209	.115	.035	.200	.111	.034	
4.0	.219	.114	.033	.214	.112	.033	.205	.109	.033	.197	.106	.032	.189	.103	.031	
5.0	.205	.104	.030	.201	.103	.030	.193	.100	.030	.185	.098	.029	.179	.095	.029	
6.0	.192	.096	.028	.188	.095	.027	.181	.093	.027	.175	.091	.027	.169	.089	.026	
7.0	.181	.089	.025	.177	.088	.025	.171	.086	.025	.165	.085	.025	.160	.083	.024	
8.0	.170	.083	.023	.167	.082	.023	.162	.081	.023	.156	.079	.023	.151	.078	.023	
9.0	.161	.078	.022	.158	.077	.022	.153	.076	.021	.148	.074	.021	.144	.073	.021	
10.0	.152	.073	.020	.150	.072	.020	.145	.071	.020	.141	.070	.020	.137	.069	.020	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.141	.154	.137	.122	.106	.094	.084	.061	.055	.049	.019	.018	.016	
2.0	.170	.136	.107	.146	.117	.092	.100	.081	.064	.058	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.058	.090	.062	.041	.052	.037	.024	.017	.012	.008	
5.0	.145	.093	.054	.125	.080	.047	.086	.056	.033	.050	.033	.020	.016	.011	.007	
6.0	.138	.084	.046	.119	.073	.040	.082	.051	.028	.048	.030	.017	.015	.010	.006	
7.0	.132	.077	.039	.114	.067	.034	.078	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.126	.072	.034	.109	.062	.030	.075	.044	.021	.044	.026	.013	.014	.008	.004	
9.0	.120	.067	.030	.104	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.115	.062	.027	.099	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.1V I:0.1801A P:38.10W PF:0.9610 实检光通:3352.6x1 lm										
灯具名称: MQG-LED40G2					灯具类型: LED 4000K			灯具重量: N/A		
灯具规格: MQG-LED40G2					外型尺寸: 1200*246*10mm			测试编号: 4		
制造厂商: CL					发光口面: 1.195*0.23			遮光角: N/A		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	15.4	16.8	15.7	17.0	17.2	16.0	17.4	16.3	17.6	17.8
3H	16.0	17.2	16.3	17.5	17.7	16.6	17.8	16.8	18.0	18.3
4H	16.4	17.6	16.8	17.9	18.1	16.8	18.0	17.2	18.3	18.5
6H	16.8	17.9	17.2	18.2	18.5	17.1	18.2	17.5	18.5	18.8
8H	17.0	18.1	17.3	18.3	18.6	17.3	18.3	17.6	18.6	18.9
12H	17.1	18.1	17.5	18.4	18.7	17.4	18.4	17.7	18.7	19.0
4H 2H	15.8	16.9	16.1	17.2	17.5	16.3	17.5	16.6	17.7	18.0
3H	16.6	17.7	17.0	18.0	18.3	17.0	18.1	17.4	18.4	18.7
4H	17.2	18.1	17.6	18.5	18.8	17.5	18.4	17.9	18.7	19.1
6H	17.7	18.5	18.1	18.9	19.3	17.9	18.7	18.3	19.1	19.5
8H	18.0	18.7	18.4	19.1	19.5	18.1	18.9	18.5	19.3	19.6
12H	18.1	18.8	18.6	19.2	19.6	18.3	19.0	18.7	19.4	19.8
8H 4H	17.4	18.2	17.8	18.5	18.9	17.7	18.4	18.1	18.8	19.2
6H	18.1	18.7	18.6	19.1	19.6	18.3	18.9	18.7	19.3	19.7
8H	18.5	19.0	18.9	19.5	19.9	18.6	19.1	19.0	19.6	20.0
12H	18.8	19.2	19.2	19.7	20.2	18.9	19.4	19.4	19.8	20.3
12H 4H	17.4	18.1	17.9	18.5	18.9	17.7	18.4	18.1	18.8	19.2
6H	18.2	18.7	18.6	19.2	19.6	18.3	18.9	18.8	19.3	19.8
8H	18.6	19.1	19.1	19.5	20.0	18.7	19.2	19.2	19.6	20.1
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 0.5 / - 0.6					+ 0.5 / - 0.6				
1.5H	+ 0.1 / - 0.4					+ 0.2 / - 0.5				
2.0H	+ 0.9 / - 1.3					+ 0.9 / - 0.6				

依据CIE Pub.117计算, 表格已按3353lm光源光通进行修正 ($81\log(F/F_0) = 4.2$) .

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:220.1V I:0.1801A P:38.10W PF:0.9610 实检光通:3352.6x1 lm		
灯具名称: MQG-LED40G2	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED40G2	外型尺寸: 1200*246*10mm	测试编号: 4
制造厂商: CL	发光口面: 1.195*0.23	遮光角: N/A


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	66	55	49	65	55	49	64	55	49	43
0.80	75	66	59	75	65	59	73	64	59	53
1.00	83	74	68	82	73	68	80	74	67	61
1.25	90	81	75	88	80	75	86	79	74	68
1.50	94	86	80	93	85	80	90	83	79	72
2.00	100	93	87	98	91	87	95	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	105	100	95	103	98	94	99	95	92	84
4.00	109	104	100	106	102	99	102	99	96	87
5.00	111	106	103	108	105	101	104	101	98	90
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2018-12-29

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具等光强曲线

实测参数: U:220.1V I:0.1801A P:38.10W PF:0.9610 实检光通:3352.6x1 lm		
灯具名称: MQG-LED40G2	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED40G2	外型尺寸: 1200*246*10mm	测试编号: 4
制造厂商: CL	发光口面: 1.195*0.23	遮光角: N/A

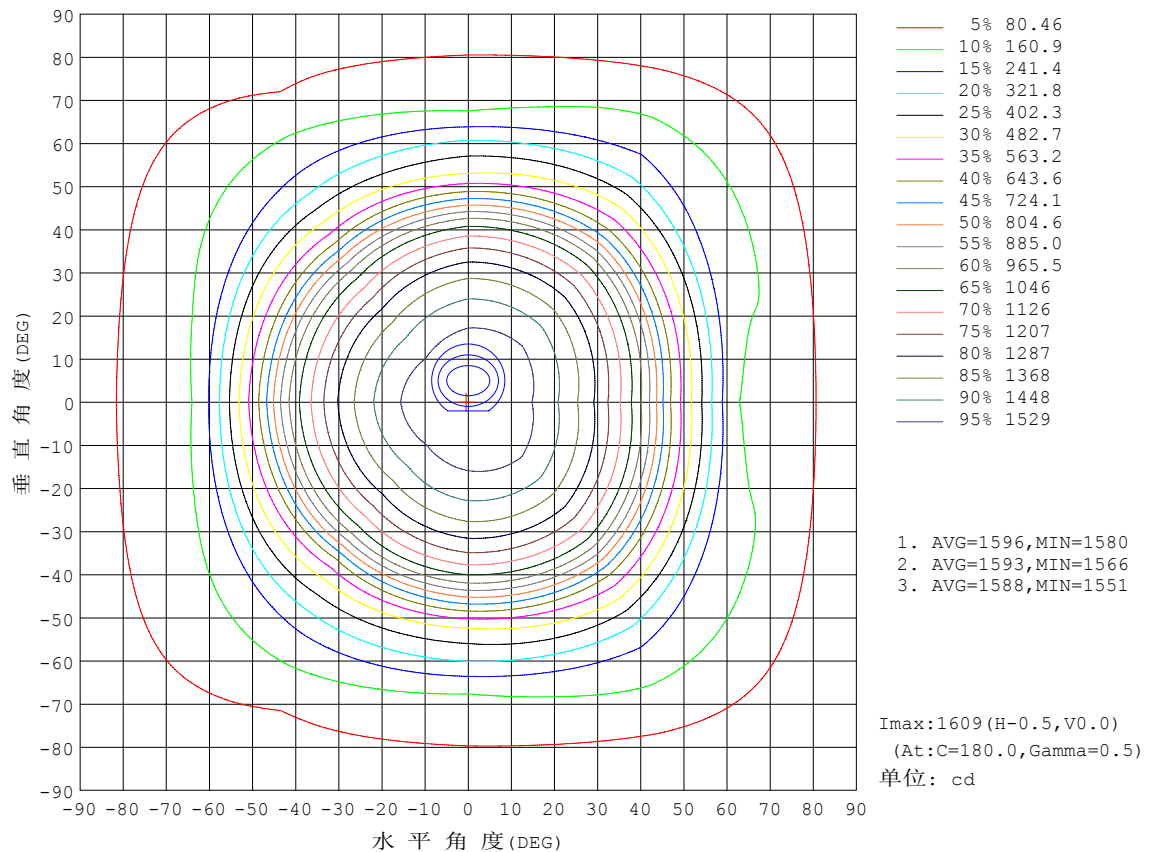


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:220.1V I:0.1801A P:38.10W PF:0.9610 实检光通:3352.6x1 lm		
灯具名称: MQG-LED40G2	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED40G2	外型尺寸: 1200*246*10mm	测试编号: 4
制造厂商: CL	发光口面: 1.195*0.23	遮光角: N/A

光通输出: 2273 lm

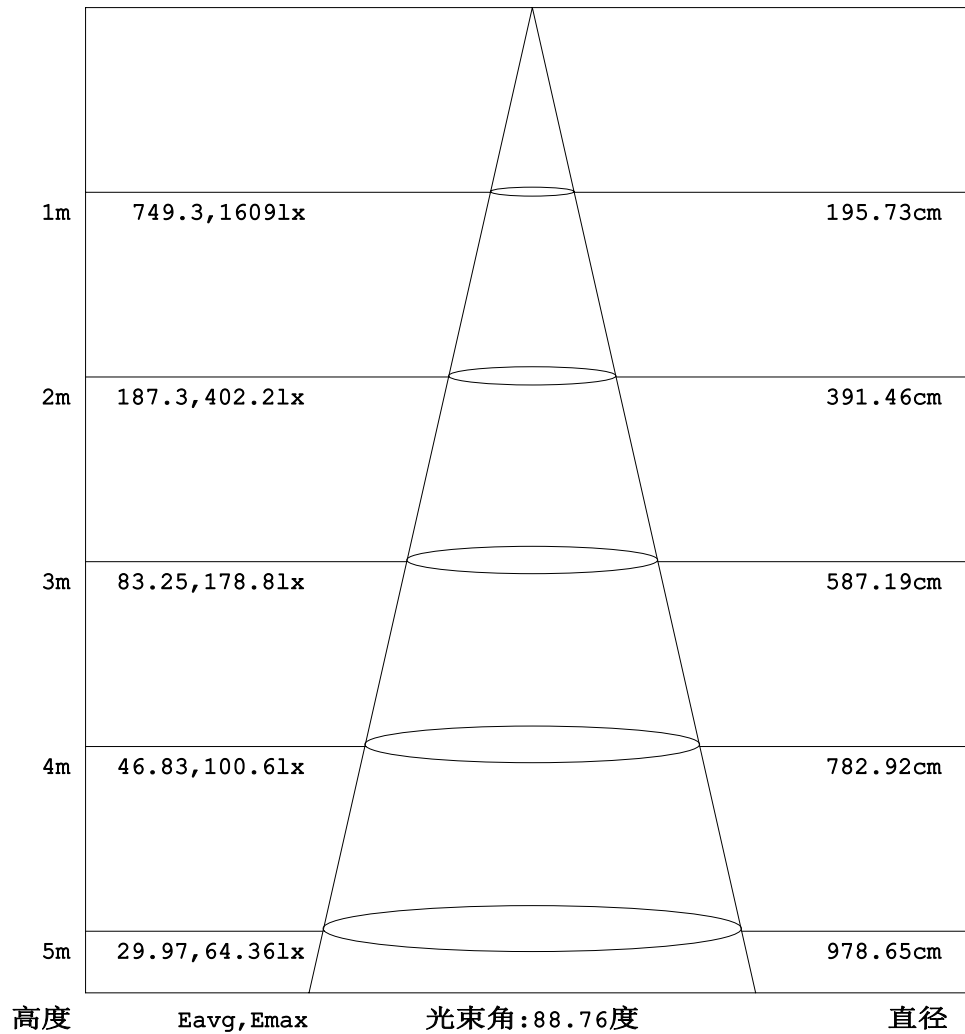


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2018-12-29

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

平面等照度曲线

实测参数: U:220.1V I:0.1801A P:38.10W PF:0.9610 实检光通:3352.6x1 lm		
灯具名称: MQG-LED40G2	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED40G2	外型尺寸: 1200*246*10mm	测试编号: 4
制造厂商: CL	发光口面: 1.195*0.23	遮光角: N/A

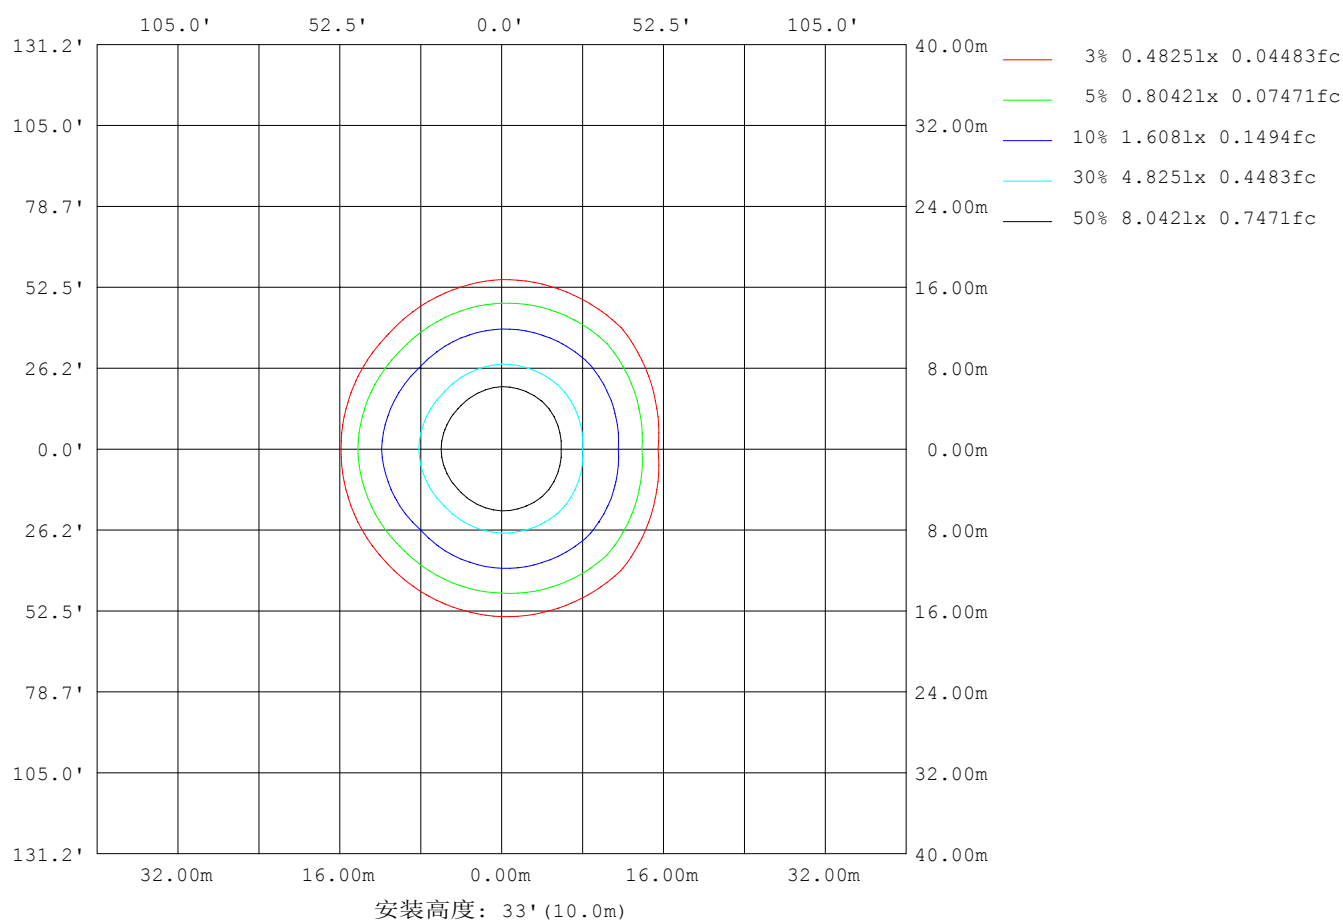

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.1V I:0.1801A P:38.10W PF:0.9610 实检光通:3352.6x1 lm		
灯具名称: MQG-LED40G2	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED40G2	外型尺寸: 1200*246*10mm	测试编号: 4
制造厂商: CL	发光口面: 1.195*0.23	遮光角: N/A


平均亮度	数值(cd/m2)
L横(65)av	1293
L横(75)av	1774
L横(85)av	1794
L纵(65)av	1821
L纵(75)av	1688
L纵(85)av	1845
L45(65)av	1956
L45(75)av	1581
L45(85)av	1712

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

平面照度曲线

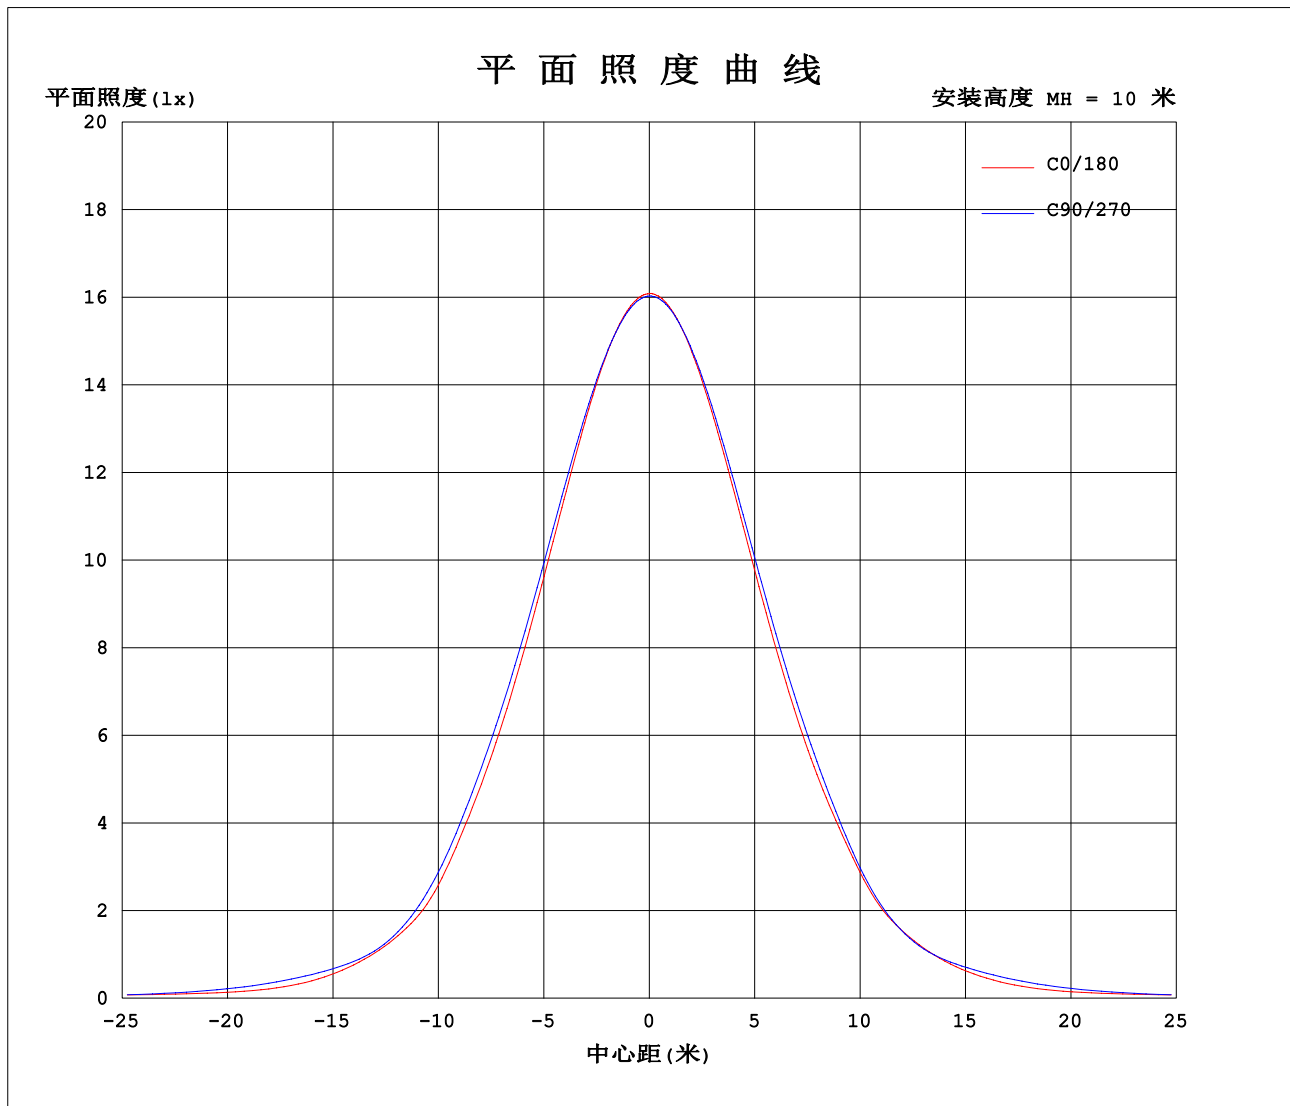

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2018-12-29

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:220.1V I:0.1801A P:38.10W PF:0.9610 实检光通:3352.6x1 lm		
灯具名称: MQG-LED40G2	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED40G2	外型尺寸: 1200*246*10mm	测试编号: 4
制造厂商: CL	发光口面: 1.195*0.23	遮光角: N/A

表--1

单位: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1608	1605	1603	1605	1608	1605	1603	1605										
5	1599	1603	1594	1591	1601	1592	1598	1605										
10	1572	1586	1572	1561	1577	1563	1580	1589										
15	1526	1553	1536	1516	1536	1519	1547	1556										
20	1461	1503	1485	1453	1477	1458	1500	1506										
25	1375	1433	1414	1367	1395	1374	1432	1437										
30	1265	1342	1322	1261	1293	1266	1342	1346										
35	1133	1227	1204	1128	1167	1134	1227	1228										
40	968	1082	1047	956	1018	964	1076	1084										
45	731	882	814	699	813	720	842	874										
50	539	640	573	509	594	527	593	635										
55	372	483	420	386	415	390	439	479										
60	210	344	325	282	245	280	340	346										
65	147	245	210	204	153	210	213	251										
70	151	185	133	148	154	153	131	192										
75	123	129	117	92.7	129	95.1	124	133										
80	85.3	83.4	78.0	66.0	90.4	68.4	85.3	85.2										
85	37.8	55.3	41.6	27.0	48.2	26.6	46.8	55.0										
90	0.32	10.5	0.39	0.31	2.78	0.29	2.06	9.60										
95	0.35	0.37	0.46	0.46	0.37	0.40	0.43	0.31										
100	0.50	0.52	0.70	0.65	0.49	0.58	0.64	0.44										
105	0.74	0.75	1.02	0.92	0.68	0.84	0.89	0.66										
110	1.00	1.05	1.41	1.27	0.92	1.16	1.23	0.93										
115	1.41	1.43	1.87	1.69	1.25	1.57	1.63	1.30										
120	1.85	1.87	2.35	2.17	1.67	2.02	2.07	1.73										
125	2.32	2.35	2.82	2.64	2.12	2.46	2.54	2.21										
130	2.78	2.82	3.29	3.07	2.59	2.88	3.00	2.69										
135	3.22	3.25	3.72	3.51	3.03	3.27	3.45	3.13										
140	3.63	3.70	4.15	3.91	3.43	3.69	3.90	3.57										
145	4.06	4.15	4.54	4.27	3.87	4.08	4.30	4.04										
150	4.51	4.59	4.90	4.64	4.32	4.49	4.71	4.49										
155	4.98	5.00	5.19	5.00	4.78	4.89	5.04	4.91										
160	5.41	5.32	5.43	5.31	5.24	5.22	5.31	5.29										
165	5.78	5.60	5.62	5.56	5.65	5.50	5.55	5.58										
170	6.05	5.79	5.76	5.75	5.97	5.74	5.73	5.80										
175	6.20	5.91	5.87	5.89	6.19	5.90	5.86	5.94										
180	6.21	5.96	5.94	6.02	6.22	5.96	5.94	6.02										

C角度范围: 0度 - 360度

C角度间隔: 45.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: weijie

测试日期: 2018-12-29

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351

环境湿度: 65.0%

测试距离: 9.490米 [K=1.0000]

备注: