


室内灯具光度数据


实测参数: U:220.0V I:0.1244A P:26.07W PF:0.9528 实检光通:2828.44x1 lm		
灯具名称: MQG-LED-220J-1	灯具类型: LED 4000k	灯具重量: N/A
灯具规格: MQG-LED-220J-1	外型尺寸: 600*600*35mm	测试编号: 1
制造厂商: CHONON	发光口面: 0.4*0.4	遮光角: N/A

光源数据		光度数据				光效: 108.51 lm/W
型号	XN2835.96.480	峰值光强(cd)	1696	S/MH(C0/180)	1.19	
标称功率(W)	26.0671	灯具效率(%)	100.0	S/MH(C90/270)	1.25	
额定电源电压(V)	220	总光通量(lm)	2828.4	η UP, DN(C0-180)	0.2, 48.5	
额定光通量(lm)	2828.44	CIE分类	直接	η UP, DN(C180-360)	0.2, 51.1	
灯具内光源数(只)	1	上射光通比(%)	0.4	CIBSE SHR NOM	1.25	
实测电源电压(V)	220.1	下射光通比(%)	99.6	CIBSE SHR MAX	1.35	

室内灯具配光曲线

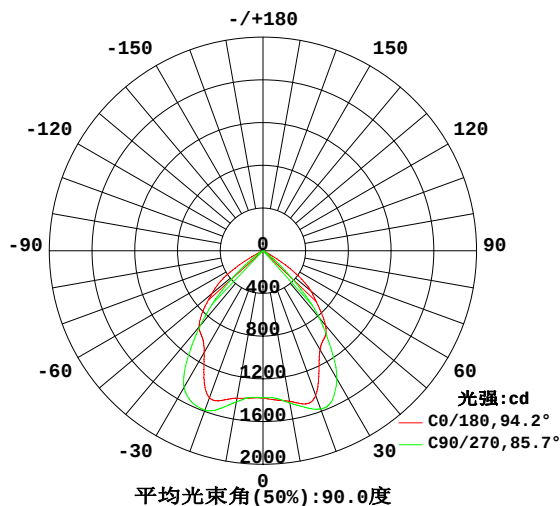

空间等照度曲线(单位: lx)

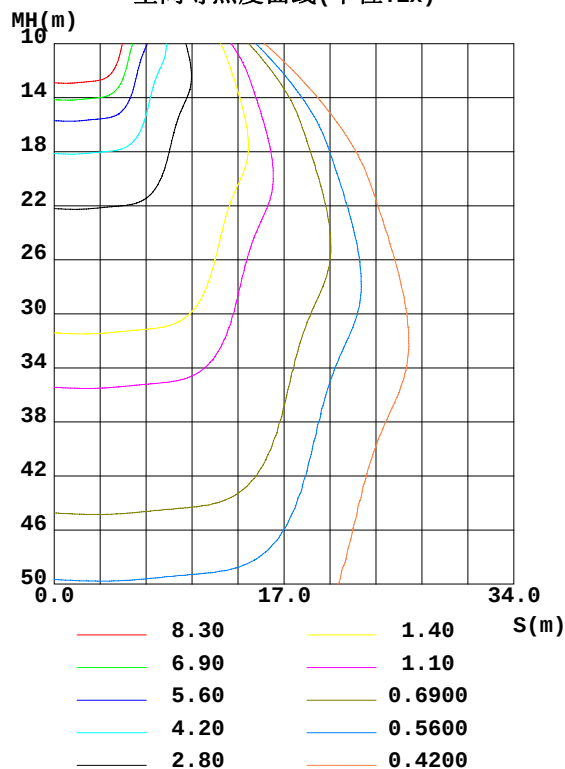

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-03-21

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
5	1403	1390	1386	1381	1385	1381	1379	1388	0- 5	33.03	33.03	1.17,1.17
10	1433	1436	1448	1422	1403	1417	1437	1430	5- 10	100.6	133.7	4.73,4.73
15	1485	1510	1518	1488	1448	1489	1528	1506	10- 15	173.6	307.2	10.9,10.9
20	1441	1604	1575	1577	1464	1601	1588	1623	15- 20	252.7	560.0	19.8,19.8
25	1242	1674	1539	1650	1314	1664	1569	1696	20- 25	327.2	887.2	31.4,31.4
30	1070	1582	1384	1571	1100	1554	1477	1595	25- 30	376.0	1263	44.7,44.7
35	1000	1334	1106	1327	992.5	1341	1232	1380	30- 35	388.0	1651	58.4,58.4
40	911.7	1089	820.2	1070	930.1	1126	909.8	1154	35- 40	368.9	2020	71.4,71.4
45	732.0	805.9	473.9	778.5	791.8	851.8	599.1	873.4	40- 45	323.8	2344	82.9,82.9
50	587.7	501.9	193.5	477.4	626.2	536.0	280.0	550.9	45- 50	241.0	2585	91.4,91.4
55	379.7	198.1	43.55	189.7	460.4	245.7	80.17	259.9	50- 55	151.6	2737	96.7,96.7
60	128.0	39.32	3.314	37.83	199.9	53.03	8.516	60.54	55- 60	64.48	2801	99.99
65	5.974	3.819	1.261	4.008	16.86	5.644	1.839	6.518	60- 65	13.41	2814	99.5,99.5
70	1.504	1.089	0.8526	1.078	2.008	1.578	1.131	1.456	65- 70	1.242	2816	99.5,99.5
75	0.7687	0.5337	0.4563	0.5389	1.078	0.8635	0.6235	0.8000	70- 75	0.5263	2816	99.6,99.6
80	0.2549	0.1368	0.1114	0.1474	0.4436	0.3340	0.1950	0.3127	75- 80	0.2399	2816	99.6,99.6
85	0	0	0	0	0.0571	0.0375	0	0.0216	80- 85	0.0570	2816	99.6,99.6
90	0	0	0	0	0	0	0	0	85- 90	0.0009	2816	99.6,99.6
95	0	0	0	0.0002	0.0005	0	0	0	90- 95	0.0000	2816	99.6,99.6
100	0.1478	0.0796	0	0.0954	0.1274	0.0525	0	0	95-100	0.0135	2816	99.6,99.6
105	0.4279	0.2544	0.0688	0.3020	0.3498	0.2270	0.0692	0.1586	100-105	0.0726	2817	99.6,99.6
110	0.8295	0.5720	0.3109	0.6408	0.6781	0.5073	0.2651	0.4648	105-110	0.1941	2817	99.6,99.6
115	1.274	1.038	0.6921	1.112	1.101	0.9251	0.5934	0.9092	110-115	0.3710	2817	99.6,99.6
120	1.724	1.567	1.247	1.651	1.530	1.417	1.059	1.412	115-120	0.5814	2818	99.6,99.6
125	2.152	2.112	1.877	2.175	1.964	1.930	1.636	1.946	120-125	0.7901	2818	99.6,99.6
130	2.596	2.631	2.517	2.646	2.377	2.385	2.250	2.449	125-130	0.9685	2819	99.7,99.7
135	3.068	3.096	3.078	3.043	2.837	2.788	2.821	2.920	130-135	1.099	2821	99.7,99.7
140	3.628	3.524	3.555	3.445	3.356	3.184	3.313	3.338	135-140	1.179	2822	99.8,99.8
145	4.152	3.942	3.962	3.879	3.927	3.634	3.752	3.771	140-145	1.215	2823	99.8,99.8
150	4.576	4.366	4.385	4.366	4.429	4.153	4.186	4.211	145-150	1.208	2824	99.8,99.8
155	4.899	4.762	4.809	4.820	4.831	4.639	4.673	4.629	150-155	1.150	2825	99.9,99.9
160	5.143	5.149	5.200	5.223	5.117	5.057	5.106	5.020	155-160	1.037	2826	99.9,99.9
165	5.391	5.498	5.528	5.561	5.360	5.412	5.466	5.380	160-165	0.8709	2827	100,100
170	5.650	5.778	5.766	5.810	5.630	5.682	5.746	5.666	165-170	0.6620	2828	100,100
175	5.893	5.958	5.911	5.974	5.894	5.909	5.936	5.884	170-175	0.4160	2828	100,100
180	6.000	5.994	5.978	6.005	6.000	5.978	5.984	6.005	175-180	0.1423	2828	100,100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 2343.9 lm

%lum = 82.9%

%lamp = 82.9%

锥面光通量(120度): 2801 lm

%lum = 99.0%


%lamp = 99.0%

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2019-03-21

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具亮度限制曲线

实测参数: U:220.0V I:0.1244A P:26.07W PF:0.9528 实检光通:2828.44x1 lm		
灯具名称: MQG-LED-220J-1	灯具类型: LED 4000k	灯具重量: N/A
灯具规格: MQG-LED-220J-1	外型尺寸: 600*600*35mm	测试编号: 1
制造厂商: CHONON	发光口面: 0.4*0.4	遮光角: N/A

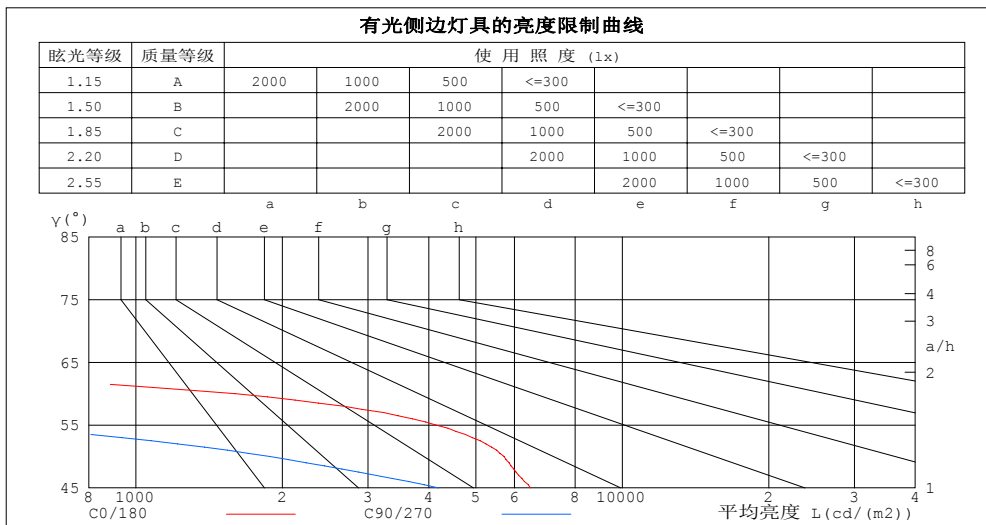

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	0	0
80	9	4
75	19	11
70	27	16
65	88	19
60	1600	41
55	4138	474
50	5715	1882
45	6470	4189


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-03-21

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:220.0V I:0.1244A P:26.07W PF:0.9528 实检光通:2828.44x1 lm		
灯具名称: MQG-LED-220J-1	灯具类型: LED 4000k	灯具重量: N/A
灯具规格: MQG-LED-220J-1	外型尺寸: 600*600*35mm	测试编号: 1
制造厂商: CHONON	发光口面: 0.4*0.4	遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.06	1.03	1.07	1.04	1.02	1.03	1.00	.98	.99	.97	.95	.95	.94	.93	.91
2.0	.99	.94	.90	.97	.93	.89	.94	.90	.87	.91	.88	.85	.88	.86	.83	.82
3.0	.90	.84	.79	.89	.83	.79	.86	.81	.77	.83	.79	.76	.81	.78	.75	.73
4.0	.82	.76	.70	.81	.75	.70	.79	.73	.69	.77	.72	.68	.75	.71	.67	.65
5.0	.75	.68	.63	.74	.68	.63	.72	.66	.62	.70	.65	.61	.69	.64	.61	.59
6.0	.69	.62	.56	.68	.61	.56	.66	.60	.56	.65	.59	.55	.63	.59	.55	.53
7.0	.63	.56	.51	.63	.56	.51	.61	.55	.50	.60	.54	.50	.59	.54	.50	.48
8.0	.58	.51	.46	.58	.51	.46	.56	.50	.46	.55	.50	.46	.54	.49	.45	.44
9.0	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.46	.42	.50	.45	.41	.40
10.0	.50	.43	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36

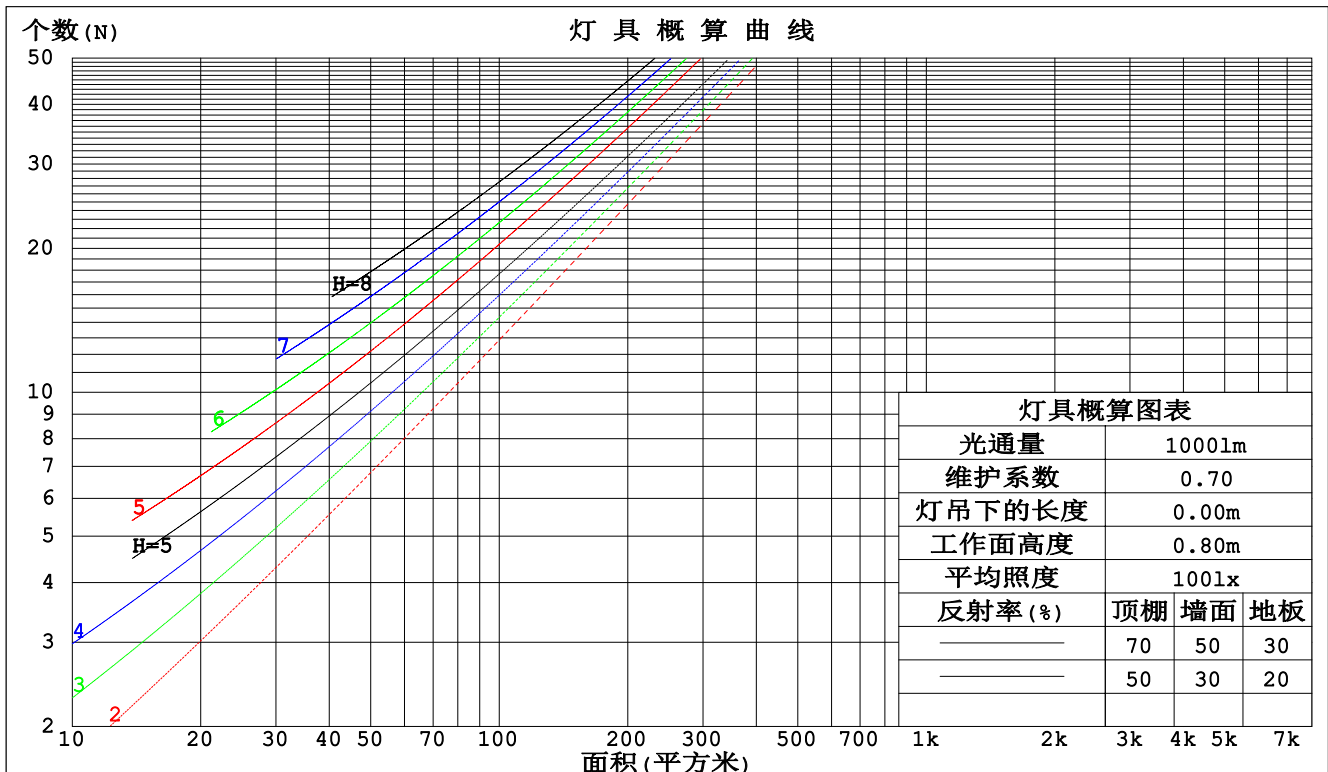

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2019-03-21

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

墙面和天花板利用系数

实测参数: U:220.0V I:0.1244A P:26.07W PF:0.9528 实检光通:2828.44x1 lm					
灯具名称: MQG-LED-220J-1			灯具类型: LED 4000k		灯具重量: N/A
灯具规格: MQG-LED-220J-1			外型尺寸: 600*600*35mm		测试编号: 1
制造厂商: CHONON			发光口面: 0.4*0.4		遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.210	.119	.038	.203	.116	.037	.190	.109	.035	.178	.103	.033	.167	.097	.031	
2.0	.206	.113	.035	.200	.110	.034	.189	.105	.033	.179	.100	.031	.169	.096	.030	
3.0	.199	.106	.032	.194	.104	.031	.184	.100	.030	.175	.096	.029	.167	.092	.029	
4.0	.190	.099	.029	.186	.097	.029	.177	.094	.028	.170	.091	.027	.162	.088	.027	
5.0	.182	.093	.027	.178	.091	.027	.170	.089	.026	.163	.086	.026	.157	.084	.025	
6.0	.173	.087	.025	.170	.086	.025	.163	.083	.024	.157	.081	.024	.151	.079	.024	
7.0	.165	.082	.023	.162	.081	.023	.156	.079	.023	.150	.077	.022	.145	.075	.022	
8.0	.157	.077	.022	.154	.076	.021	.149	.074	.021	.144	.073	.021	.139	.071	.021	
9.0	.150	.072	.020	.147	.072	.020	.142	.070	.020	.138	.069	.020	.133	.068	.020	
10.0	.143	.069	.019	.141	.068	.019	.136	.067	.019	.132	.066	.019	.128	.064	.018	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.177	.160	.146	.151	.138	.125	.103	.095	.087	.060	.055	.050	.019	.018	.016	
2.0	.164	.136	.112	.141	.117	.096	.096	.081	.067	.056	.047	.039	.018	.015	.013	
3.0	.154	.117	.088	.132	.101	.076	.091	.070	.053	.052	.041	.031	.017	.013	.010	
4.0	.146	.103	.070	.125	.089	.061	.086	.062	.043	.050	.036	.025	.016	.012	.008	
5.0	.138	.092	.058	.119	.080	.050	.082	.056	.035	.047	.033	.021	.015	.011	.007	
6.0	.132	.083	.048	.113	.072	.042	.078	.050	.030	.045	.030	.018	.015	.010	.006	
7.0	.126	.076	.041	.108	.066	.036	.075	.046	.025	.043	.027	.015	.014	.009	.005	
8.0	.121	.070	.036	.104	.061	.031	.072	.043	.022	.042	.025	.013	.014	.008	.004	
9.0	.115	.065	.031	.099	.057	.027	.069	.040	.019	.040	.024	.012	.013	.008	.004	
10.0	.111	.061	.028	.095	.053	.024	.066	.037	.017	.039	.022	.010	.013	.007	.003	

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-03-21

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.0V I:0.1244A P:26.07W PF:0.9528 实检光通:2828.44x1 lm										
灯具名称: MQG-LED-220J-1					灯具类型: LED 4000k			灯具重量: N/A		
灯具规格: MQG-LED-220J-1					外型尺寸: 600*600*35mm			测试编号: 1		
制造厂商: CHONON					发光口面: 0.4*0.4			遮光角: N/A		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	16.5	17.7	16.8	17.9	18.1	14.9	16.1	15.1	16.3	16.5
3H	16.3	17.4	16.6	17.6	17.8	14.7	15.8	15.0	16.0	16.2
4H	16.2	17.2	16.5	17.5	17.7	14.6	15.6	14.9	15.8	16.1
6H	16.1	17.1	16.4	17.3	17.6	14.5	15.4	14.8	15.7	16.0
8H	16.1	17.0	16.4	17.3	17.5	14.4	15.4	14.8	15.6	15.9
12H	16.0	16.9	16.4	17.2	17.5	14.4	15.3	14.7	15.6	15.8
4H 2H	16.2	17.3	16.5	17.5	17.8	14.7	15.7	15.0	15.9	16.2
3H	16.1	16.9	16.4	17.2	17.5	14.5	15.4	14.8	15.7	15.9
4H	16.0	16.8	16.3	17.1	17.4	14.4	15.2	14.8	15.5	15.8
6H	15.9	16.6	16.3	16.9	17.3	14.3	15.0	14.7	15.3	15.7
8H	15.8	16.5	16.2	16.8	17.2	14.3	14.9	14.7	15.3	15.6
12H	15.8	16.4	16.2	16.7	17.1	14.2	14.8	14.6	15.2	15.6
8H 4H	15.8	16.5	16.2	16.8	17.2	14.3	14.9	14.7	15.3	15.6
6H	15.7	16.2	16.2	16.7	17.1	14.2	14.7	14.6	15.1	15.5
8H	15.7	16.1	16.1	16.6	17.0	14.1	14.6	14.6	15.0	15.4
12H	15.6	16.0	16.1	16.5	17.0	14.1	14.5	14.5	14.9	15.4
12H 4H	15.8	16.4	16.2	16.7	17.1	14.2	14.8	14.6	15.2	15.6
6H	15.7	16.1	16.1	16.6	17.0	14.1	14.6	14.6	15.0	15.4
8H	15.6	16.0	16.1	16.5	17.0	14.1	14.5	14.5	14.9	15.4
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 2.2 / - 3.7					+ 2.8 / -17.1				
1.5H	+ 0.9 / - 3.5					+ 2.5 / - 7.3				
2.0H	+ 3.8 / -20.2					+ 5.3 / -27.5				

依据CIE Pub.117计算, 表格已按2828lm光源光通进行修正 ($81\log(F/F_0) = 3.6$) .

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-03-21

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:220.0V I:0.1244A P:26.07W PF:0.9528 实检光通:2828.44x1 lm		
灯具名称: MQG-LED-220J-1	灯具类型: LED 4000k	灯具重量: N/A
灯具规格: MQG-LED-220J-1	外型尺寸: 600*600*35mm	测试编号: 1
制造厂商: CHONON	发光口面: 0.4*0.4	遮光角: N/A


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	73	64	59	72	64	59	71	63	58	53
0.80	83	74	69	82	74	69	80	73	69	63
1.00	90	83	78	89	82	77	87	83	77	72
1.25	96	89	85	95	89	84	93	87	83	78
1.50	100	94	89	99	93	89	96	91	88	82
2.00	105	99	95	103	98	94	100	96	93	87
2.50	107	102	98	105	101	97	102	98	95	88
3.00	109	105	101	107	103	100	103	100	98	91
4.00	111	108	105	109	106	103	105	103	101	93
5.00	113	110	107	110	108	105	106	104	102	94
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2019-03-21

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具等光强曲线

实测参数: U:220.0V I:0.1244A P:26.07W PF:0.9528 实检光通:2828.44x1 lm		
灯具名称: MQG-LED-220J-1	灯具类型: LED 4000k	灯具重量: N/A
灯具规格: MQG-LED-220J-1	外型尺寸: 600*600*35mm	测试编号: 1
制造厂商: CHONON	发光口面: 0.4*0.4	遮光角: N/A

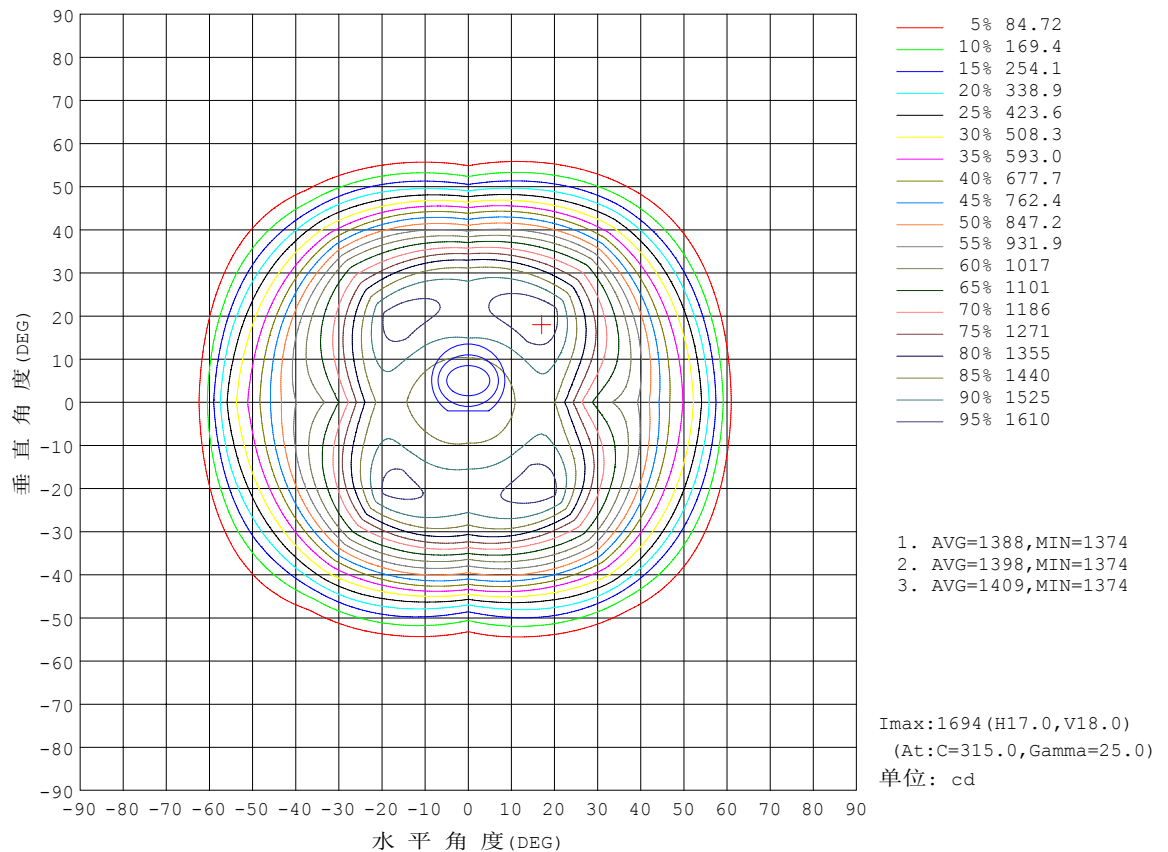


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-03-21

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯具有效平均照度图

实测参数: U:220.0V I:0.1244A P:26.07W PF:0.9528 实检光通:2828.44x1 lm		
灯具名称: MQG-LED-220J-1	灯具类型: LED 4000k	灯具重量: N/A
灯具规格: MQG-LED-220J-1	外型尺寸: 600*600*35mm	测试编号: 1
制造厂商: CHONON	发光口面: 0.4*0.4	遮光角: N/A

光通输出: 2223 lm

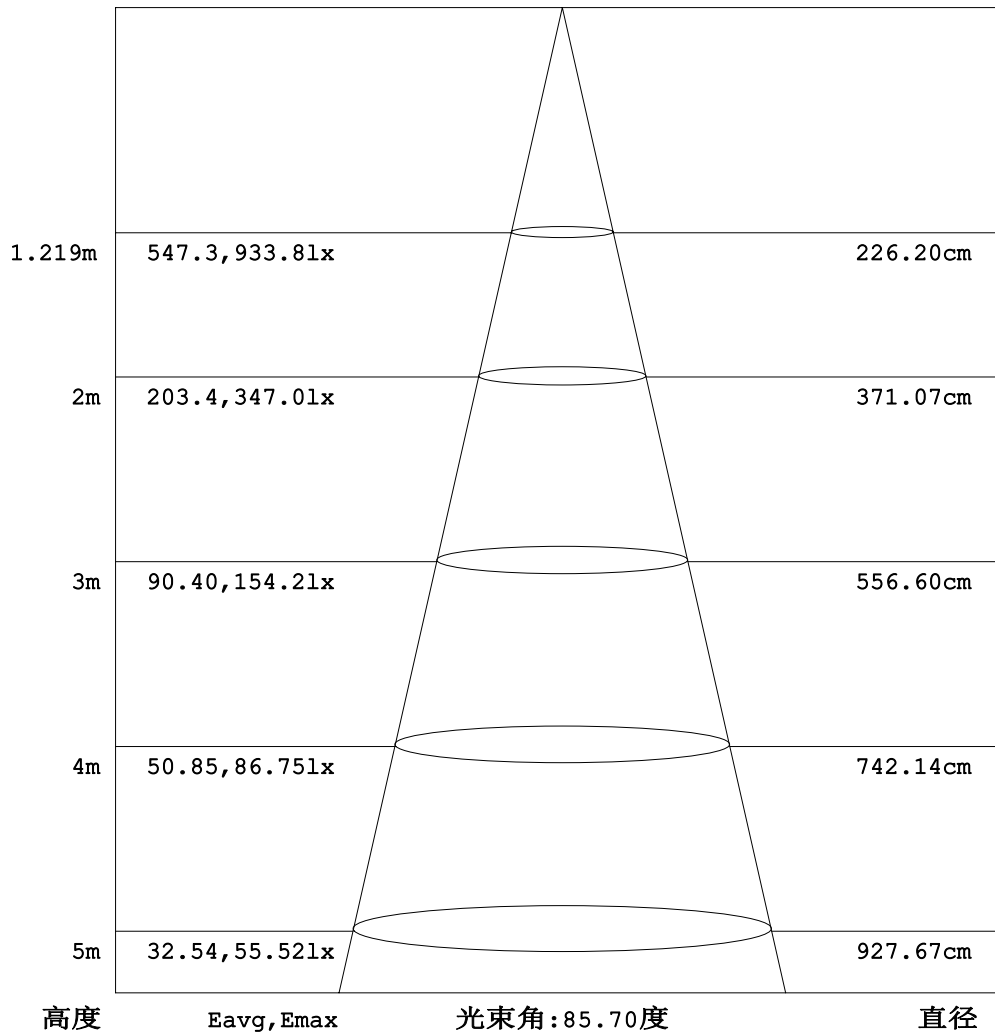


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-03-21

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:220.0V I:0.1244A P:26.07W PF:0.9528 实检光通:2828.44x1 lm		
灯具名称: MQG-LED-220J-1	灯具类型: LED 4000k	灯具重量: N/A
灯具规格: MQG-LED-220J-1	外型尺寸: 600*600*35mm	测试编号: 1
制造厂商: CHONON	发光口面: 0.4*0.4	遮光角: N/A

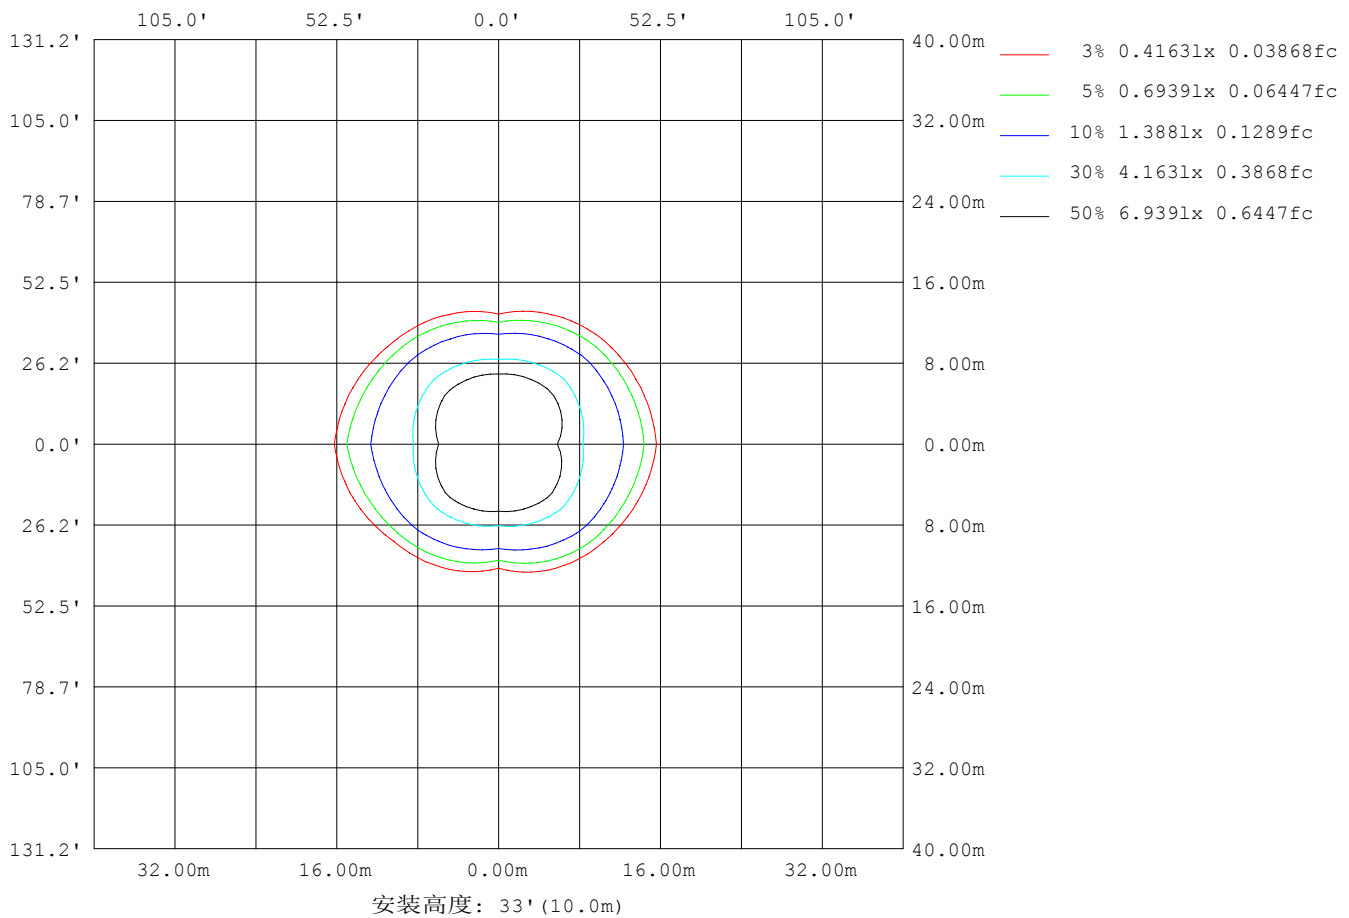

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-03-21

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.0V I:0.1244A P:26.07W PF:0.9528 实检光通:2828.44x1 lm		
灯具名称: MQG-LED-220J-1	灯具类型: LED 4000k	灯具重量: N/A
灯具规格: MQG-LED-220J-1	外型尺寸: 600*600*35mm	测试编号: 1
制造厂商: CHONON	发光口面: 0.4*0.4	遮光角: N/A


平均亮度	数值(cd/m2)
L横(65)av	169
L横(75)av	22
L横(85)av	2
L纵(65)av	23
L纵(75)av	13
L纵(85)av	0
L45(65)av	74
L45(75)av	17
L45(85)av	1

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-03-21

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

平面照度曲线

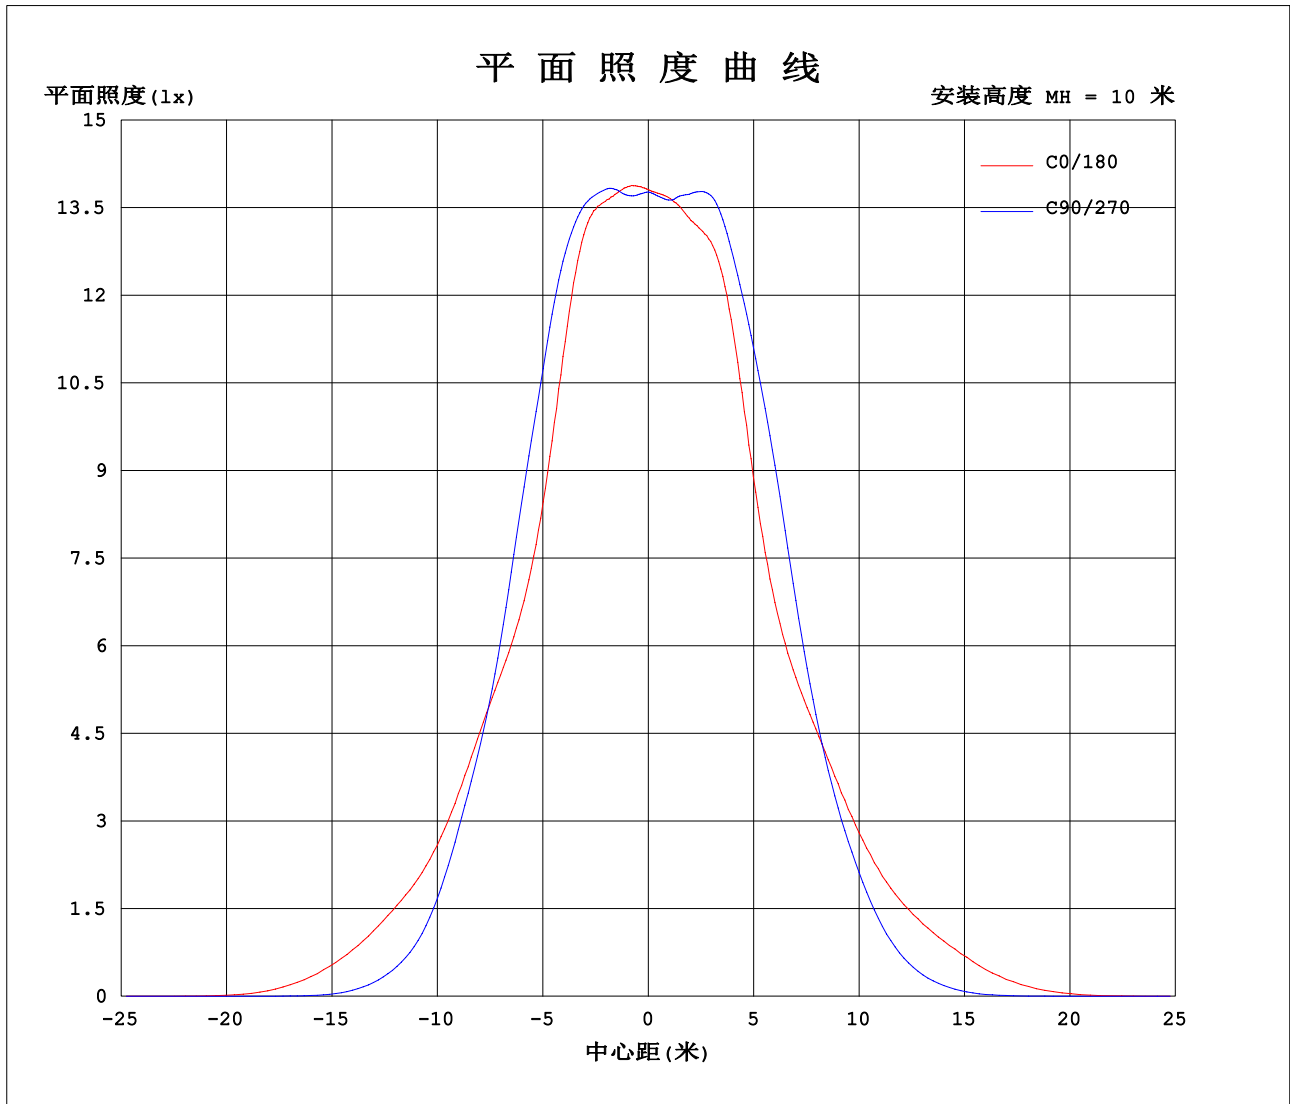

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-03-21

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:220.0V I:0.1244A P:26.07W PF:0.9528 实检光通:2828.44x1 lm		
灯具名称: MQG-LED-220J-1	灯具类型: LED 4000k	灯具重量: N/A
灯具规格: MQG-LED-220J-1	外型尺寸: 600*600*35mm	测试编号: 1
制造厂商: CHONON	发光口面: 0.4*0.4	遮光角: N/A

表--1

单位: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1381	1378	1377	1377	1381	1378	1377	1377										
5	1403	1390	1386	1381	1385	1381	1379	1388										
10	1433	1436	1448	1422	1403	1417	1437	1430										
15	1485	1510	1518	1488	1448	1489	1528	1506										
20	1441	1604	1575	1577	1464	1601	1588	1623										
25	1242	1674	1539	1650	1314	1664	1569	1696										
30	1070	1582	1384	1571	1100	1554	1477	1595										
35	1000	1334	1106	1327	992	1341	1232	1380										
40	912	1089	820	1070	930	1126	910	1154										
45	732	806	474	779	792	852	599	873										
50	588	502	194	477	626	536	280	551										
55	380	198	43.5	190	460	246	80.2	260										
60	128	39.3	3.31	37.8	200	53.0	8.52	60.5										
65	5.97	3.82	1.26	4.01	16.9	5.64	1.84	6.52										
70	1.50	1.09	0.85	1.08	2.01	1.58	1.13	1.46										
75	0.77	0.53	0.46	0.54	1.08	0.86	0.62	0.80										
80	0.25	0.14	0.11	0.15	0.44	0.33	0.20	0.31										
85	0.00	0.00	0.00	0.00	0.06	0.04	0.00	0.02										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.15	0.08	0.00	0.10	0.13	0.05	0.00	0.00										
105	0.43	0.25	0.07	0.30	0.35	0.23	0.07	0.16										
110	0.83	0.57	0.31	0.64	0.68	0.51	0.27	0.46										
115	1.27	1.04	0.69	1.11	1.10	0.93	0.59	0.91										
120	1.72	1.57	1.25	1.65	1.53	1.42	1.06	1.41										
125	2.15	2.11	1.88	2.18	1.96	1.93	1.64	1.95										
130	2.60	2.63	2.52	2.65	2.38	2.39	2.25	2.45										
135	3.07	3.10	3.08	3.04	2.84	2.79	2.82	2.92										
140	3.63	3.52	3.55	3.44	3.36	3.18	3.31	3.34										
145	4.15	3.94	3.96	3.88	3.93	3.63	3.75	3.77										
150	4.58	4.37	4.39	4.37	4.43	4.15	4.19	4.21										
155	4.90	4.76	4.81	4.82	4.83	4.64	4.67	4.63										
160	5.14	5.15	5.20	5.22	5.12	5.06	5.11	5.02										
165	5.39	5.50	5.53	5.56	5.36	5.41	5.47	5.38										
170	5.65	5.78	5.77	5.81	5.63	5.68	5.75	5.67										
175	5.89	5.96	5.91	5.97	5.89	5.91	5.94	5.88										
180	6.00	5.99	5.98	6.00	6.00	5.98	5.98	6.00										

C角度范围: 0度 - 360度

C角度间隔: 45.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: weijie

测试日期: 2019-03-21

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351

环境湿度: 65.0%

测试距离: 9.490米 [K=1.0000]

备注: