


室内灯具光度数据

实测参数: U:220.1V I:0.1238A P:26.27W PF:0.9636 实检光通:2666.96x1 lm		
灯具名称: MQG-LED-130A-G	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED-130A-G	外型尺寸: 1160*58*70mm	测试编号: 1
制造厂商: CHONON	发光口面: 1.136*0.037	遮光角: N/A

光源数据		光度数据				光效: 101.53 lm/W
型号	WW	峰值光强(cd)	7102	S/MH(C0/180)	0.55	
标称功率(W)	26.2667	灯具效率(%)	100.0	S/MH(C90/270)	0.56	
额定电源电压(V)	220	总光通量(lm)	2667.0	η UP, DN(C0-180)	0.2, 49.8	
额定光通量(lm)	2666.96	CIE分类	直接	η UP, DN(C180-360)	0.2, 49.8	
灯具内光源数(只)	1	上射光通比(%)	0.5	CIBSE SHR NOM	0.50	
实测电源电压(V)	220.1	下射光通比(%)	99.5	CIBSE SHR MAX	0.55	

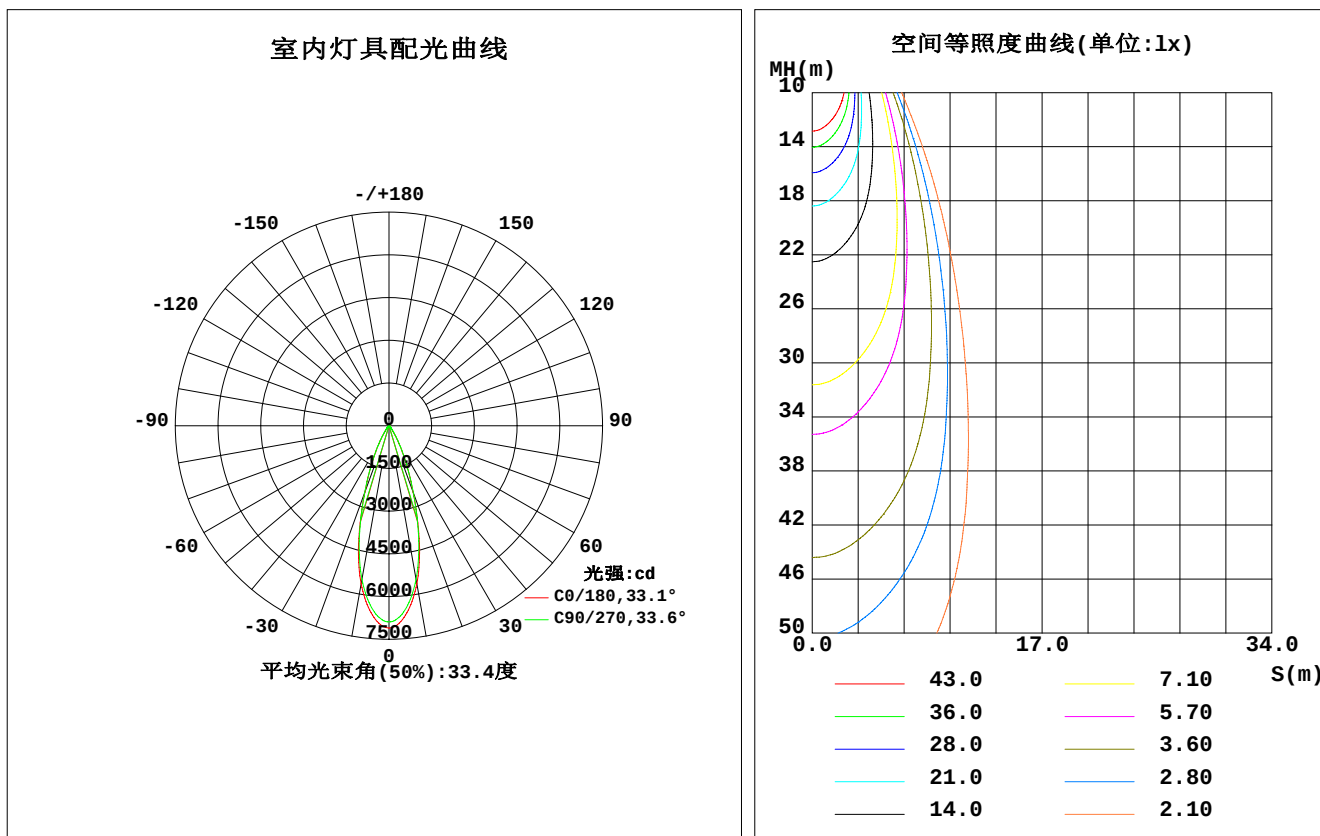

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-04-03

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
5	6676	6562	6489	6562	6676	6562	6489	6562	0- 5	161.9	161.9	6.07, 6.07
10	5636	5526	5472	5526	5636	5526	5472	5526	5- 10	432.3	594.2	22.3, 22.3
15	4092	4069	4018	4069	4092	4069	4018	4069	10- 15	567.6	1162	43.6, 43.6
20	2496	2544	2503	2544	2496	2544	2503	2544	15- 20	533.2	1695	63.6, 63.6
25	1359	1402	1384	1402	1359	1402	1384	1402	20- 25	397.6	2093	78.5, 78.5
30	661.4	686.7	684.8	686.7	661.4	686.7	684.8	686.7	25- 30	251.5	2344	87.9, 87.9
35	276.1	291.7	292.7	291.7	276.1	291.7	292.7	291.7	30- 35	134.2	2478	92.9, 92.9
40	126.7	129.6	136.1	129.6	126.7	129.6	136.1	129.6	35- 40	64.28	2543	95.3, 95.3
45	82.51	83.14	87.80	83.14	82.51	83.14	87.80	83.14	40- 45	38.17	2581	96.8, 96.8
50	57.23	59.50	60.40	59.50	57.23	59.50	60.40	59.50	45- 50	28.77	2610	97.8, 97.8
55	32.32	38.98	34.37	38.98	32.32	38.98	34.37	38.98	50- 55	20.60	2630	98.6, 98.6
60	17.08	22.27	18.20	22.27	17.08	22.27	18.20	22.27	55- 60	12.61	2643	99.1, 99.1
65	8.215	10.07	9.511	10.07	8.215	10.07	9.511	10.07	60- 65	6.906	2650	99.4, 99.4
70	2.621	4.015	3.402	4.015	2.621	4.015	3.402	4.015	65- 70	3.193	2653	99.5, 99.5
75	0	0.4002	0	0.4002	0	0.4002	0	0.4002	70- 75	0.7411	2654	99.5, 99.5
80	0	0	0	0	0	0	0	0	75- 80	0.0187	2654	99.5, 99.5
85	0	0	0	0	0	0	0	0	80- 85	0	2654	99.5, 99.5
90	0	0	0	0	0	0	0	0	85- 90	0	2654	99.5, 99.5
95	0	0	0	0	0	0	0	0	90- 95	0	2654	99.5, 99.5
100	0	0	0	0	0	0	0	0	95-100	0	2654	99.5, 99.5
105	0	0.0013	0.0106	0.0013	0	0.0013	0.0106	0.0013	100-105	0.0003	2654	99.5, 99.5
110	0.0186	0.0160	0.0371	0.0160	0.0186	0.0160	0.0371	0.0160	105-110	0.0055	2654	99.5, 99.5
115	0.0555	0.0913	0.1349	0.0913	0.0555	0.0913	0.1349	0.0913	110-115	0.0278	2654	99.5, 99.5
120	0.1401	0.2169	0.3226	0.2169	0.1401	0.2169	0.3226	0.2169	115-120	0.0733	2654	99.5, 99.5
125	0.3071	0.4683	0.6612	0.4683	0.3071	0.4683	0.6612	0.4683	120-125	0.1551	2654	99.5, 99.5
130	0.6563	0.9327	1.206	0.9327	0.6563	0.9327	1.206	0.9327	125-130	0.2958	2654	99.5, 99.5
135	1.315	1.724	2.018	1.724	1.315	1.724	2.018	1.724	130-135	0.5170	2655	99.5, 99.5
140	2.445	2.922	3.137	2.922	2.445	2.922	3.137	2.922	135-140	0.8271	2656	99.6, 99.6
145	4.135	4.521	4.613	4.521	4.135	4.521	4.613	4.521	140-145	1.203	2657	99.6, 99.6
150	6.252	6.460	6.362	6.460	6.252	6.460	6.362	6.460	145-150	1.582	2658	99.7, 99.7
155	8.578	8.522	8.243	8.522	8.578	8.522	8.243	8.522	150-155	1.872	2660	99.7, 99.7
160	10.79	10.47	10.11	10.47	10.79	10.47	10.11	10.47	155-160	1.980	2662	99.8, 99.8
165	12.63	12.10	11.81	12.10	12.63	12.10	11.81	12.10	160-165	1.863	2664	99.9, 99.9
170	14.00	13.36	13.24	13.36	14.00	13.36	13.24	13.36	165-170	1.520	2666	99.9, 99.9
175	14.80	14.34	14.45	14.34	14.80	14.34	14.45	14.34	170-175	0.9992	2667	100, 100
180	15.42	14.93	15.13	14.93	15.42	14.93	15.13	14.93	175-180	0.3527	2667	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 2580.9 lm

%lum = 96.8%

%lamp = 96.8%

锥面光通量(120度): 2642.8 lm

%lum = 99.1%


%lamp = 99.1%

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2019-04-03

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具亮度限制曲线

实测参数: U:220.1V I:0.1238A P:26.27W PF:0.9636 实检光通:2666.96x1 lm		
灯具名称: MQG-LED-130A-G	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED-130A-G	外型尺寸: 1160*58*70mm	测试编号: 1
制造厂商: CHONON	发光口面: 1.136*0.037	遮光角: N/A

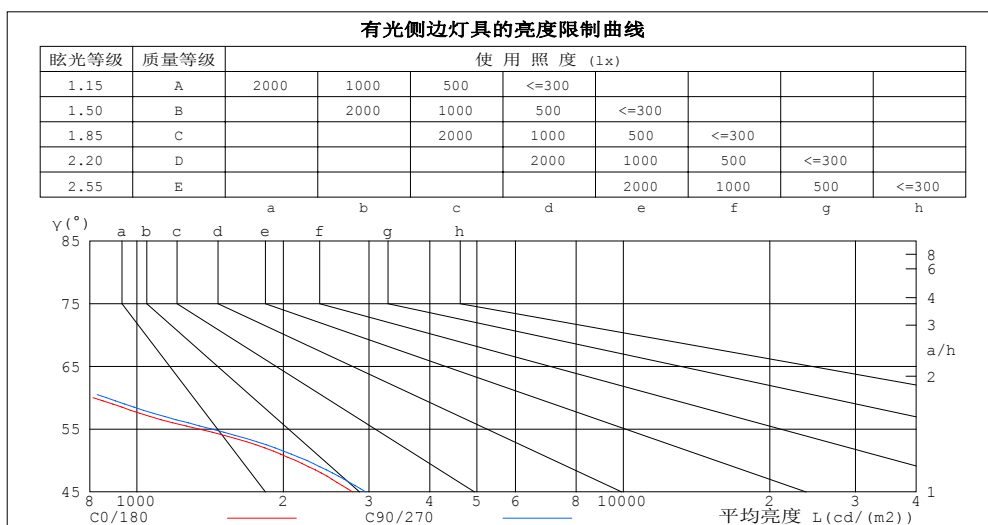

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	182	237
65	462	535
60	813	866
55	1340	1426
50	2118	2236
45	2776	2954


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-04-03

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:220.1V I:0.1238A P:26.27W PF:0.9636 实检光通:2666.96x1 lm		
灯具名称: MQG-LED-130A-G	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED-130A-G	外型尺寸: 1160*58*70mm	测试编号: 1
制造厂商: CHONON	发光口面: 1.136*0.037	遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.98	.97	.97	.95
2.0	1.06	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.93	.92	.90
3.0	.00	.96	.92	.99	.95	.92	.96	.93	.90	.94	.91	.89	.91	.89	.87	.86
4.0	.95	.90	.87	.94	.90	.86	.92	.88	.85	.90	.87	.84	.88	.85	.83	.82
5.0	.90	.86	.82	.90	.85	.82	.88	.84	.81	.86	.83	.80	.85	.82	.79	.78
6.0	.86	.81	.78	.86	.81	.78	.84	.80	.77	.83	.79	.77	.82	.78	.76	.75
7.0	.83	.78	.74	.82	.77	.74	.81	.77	.74	.80	.76	.73	.79	.75	.73	.72
8.0	.79	.74	.71	.79	.74	.71	.78	.74	.71	.77	.73	.70	.76	.72	.70	.69
9.0	.76	.71	.68	.76	.71	.68	.75	.71	.68	.74	.70	.67	.73	.70	.67	.66
10.0	.73	.69	.65	.73	.68	.65	.72	.68	.65	.71	.68	.65	.71	.67	.65	.64

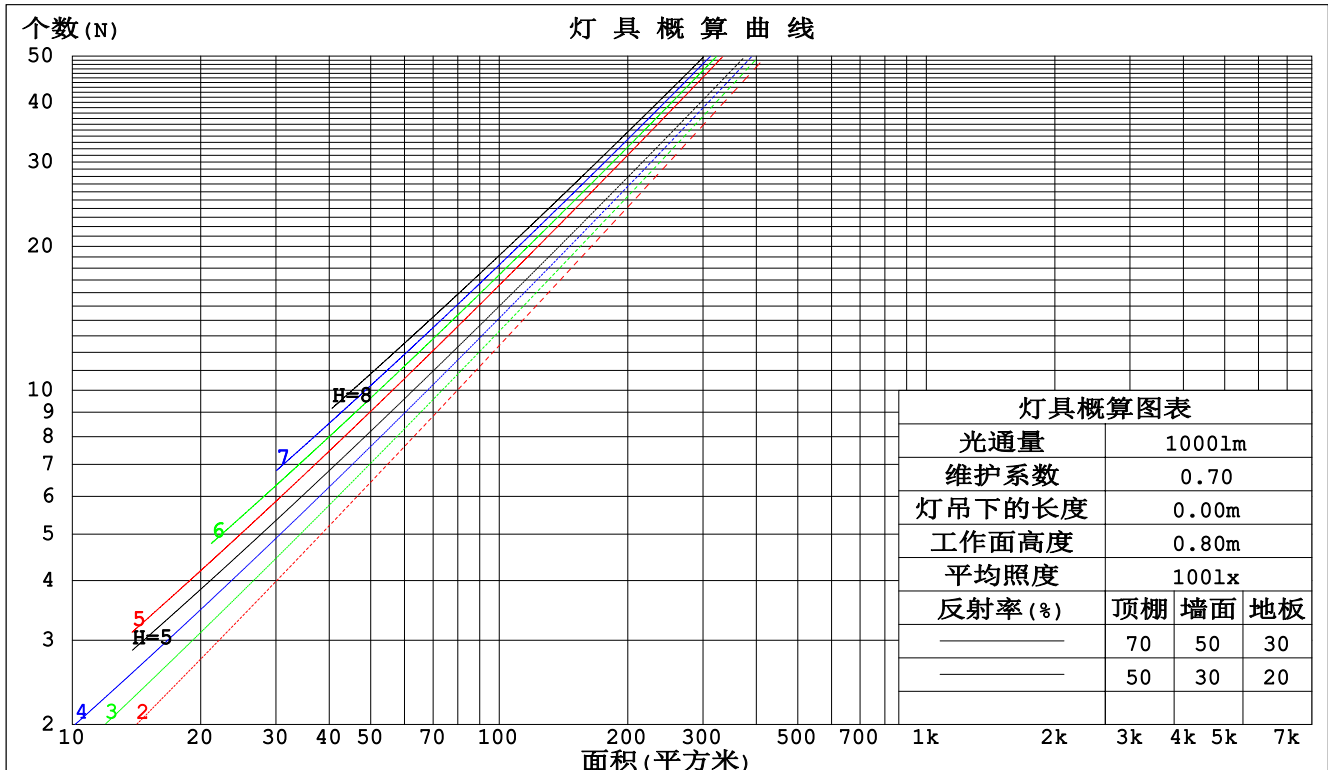

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2019-04-03

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

墙面和天花板利用系数

实测参数: U:220.1V I:0.1238A P:26.27W PF:0.9636 实检光通:2666.96x1 lm					
灯具名称: MQG-LED-130A-G			灯具类型: LED 4000K		灯具重量: N/A
灯具规格: MQG-LED-130A-G			外型尺寸: 1160*58*70mm		测试编号: 1
制造厂商: CHONON			发光口面: 1.136*0.037		遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.155	.088	.028	.148	.084	.027	.135	.077	.025	.123	.071	.023	.112	.065	.021	
2.0	.146	.080	.024	.140	.077	.024	.129	.072	.022	.120	.067	.021	.110	.062	.020	
3.0	.137	.073	.022	.132	.071	.021	.124	.067	.020	.115	.063	.019	.107	.060	.018	
4.0	.130	.067	.020	.126	.066	.019	.118	.063	.019	.111	.060	.018	.104	.057	.017	
5.0	.123	.063	.018	.119	.061	.018	.113	.059	.017	.107	.056	.017	.101	.054	.016	
6.0	.117	.059	.017	.114	.058	.017	.108	.055	.016	.103	.053	.016	.098	.051	.015	
7.0	.111	.055	.016	.109	.054	.015	.104	.052	.015	.099	.051	.015	.094	.049	.014	
8.0	.106	.052	.015	.104	.051	.014	.100	.050	.014	.095	.048	.014	.091	.047	.014	
9.0	.102	.049	.014	.100	.049	.014	.096	.047	.013	.092	.046	.013	.088	.045	.013	
10.0	.098	.047	.013	.096	.046	.013	.092	.045	.013	.089	.044	.013	.086	.043	.012	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.173	.161	.150	.148	.138	.130	.101	.095	.090	.058	.055	.052	.019	.018	.017	
2.0	.157	.136	.120	.134	.117	.103	.092	.081	.072	.053	.047	.042	.017	.015	.014	
3.0	.143	.117	.097	.122	.101	.084	.084	.070	.059	.049	.041	.035	.016	.013	.011	
4.0	.131	.102	.080	.113	.088	.069	.077	.062	.049	.045	.036	.029	.014	.012	.010	
5.0	.122	.090	.067	.104	.078	.058	.072	.055	.041	.042	.032	.024	.013	.010	.008	
6.0	.113	.081	.057	.097	.070	.050	.067	.049	.035	.039	.029	.021	.013	.009	.007	
7.0	.106	.073	.049	.091	.063	.043	.063	.044	.030	.037	.026	.018	.012	.009	.006	
8.0	.100	.066	.043	.086	.057	.037	.060	.040	.026	.035	.024	.016	.011	.008	.005	
9.0	.095	.061	.038	.082	.053	.033	.057	.037	.023	.033	.022	.014	.011	.007	.005	
10.0	.090	.056	.033	.078	.049	.029	.054	.034	.021	.031	.020	.012	.010	.007	.004	

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-04-03

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.1V I:0.1238A P:26.27W PF:0.9636 实检光通:2666.96x1 lm										
灯具名称: MQG-LED-130A-G					灯具类型: LED 4000K			灯具重量: N/A		
灯具规格: MQG-LED-130A-G					外型尺寸: 1160*58*70mm			测试编号: 1		
制造厂商: CHONON					发光口面: 1.136*0.037			遮光角: N/A		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	8.7	9.5	8.9	9.6	9.8	8.9	9.7	9.1	9.9	10.0
3H	8.6	9.3	8.8	9.5	9.7	8.8	9.5	9.1	9.7	9.9
4H	8.5	9.2	8.8	9.4	9.6	8.7	9.4	9.0	9.6	9.9
6H	8.4	9.1	8.7	9.3	9.6	8.7	9.3	8.9	9.5	9.8
8H	8.4	9.0	8.7	9.2	9.5	8.6	9.2	8.9	9.5	9.7
12H	8.3	8.9	8.7	9.2	9.5	8.6	9.2	8.9	9.4	9.7
4H 2H	8.6	9.3	8.9	9.5	9.7	8.8	9.5	9.1	9.7	9.9
3H	8.5	9.1	8.8	9.3	9.6	8.7	9.3	9.0	9.6	9.8
4H	8.4	8.9	8.7	9.2	9.5	8.6	9.1	8.9	9.4	9.8
6H	8.3	8.8	8.7	9.1	9.4	8.5	9.0	8.9	9.3	9.7
8H	8.2	8.7	8.6	9.0	9.4	8.4	8.9	8.8	9.2	9.6
12H	8.2	8.6	8.6	9.0	9.4	8.4	8.8	8.8	9.2	9.6
8H 4H	8.2	8.7	8.6	9.0	9.4	8.5	8.9	8.8	9.2	9.6
6H	8.1	8.5	8.6	8.9	9.3	8.3	8.7	8.8	9.1	9.5
8H	8.1	8.4	8.5	8.8	9.3	8.3	8.6	8.7	9.0	9.5
12H	8.0	8.3	8.5	8.7	9.2	8.2	8.5	8.7	8.9	9.4
12H 4H	8.2	8.6	8.6	9.0	9.4	8.4	8.8	8.8	9.2	9.6
6H	8.1	8.4	8.5	8.8	9.3	8.3	8.6	8.7	9.0	9.5
8H	8.0	8.3	8.5	8.7	9.2	8.2	8.5	8.7	8.9	9.4
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 2.4 / - 4.2					+ 2.5 / - 4.1				
1.5H	+ 3.1 / - 2.2					+ 3.3 / - 2.3				
2.0H	+ 3.2 / - 4.7					+ 3.2 / - 4.7				

依据CIE Pub.117计算, 表格已按2667lm光源光通进行修正 ($81\log(F/F_0) = 3.4$) .

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-04-03

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:220.1V I:0.1238A P:26.27W PF:0.9636 实检光通:2666.96x1 lm		
灯具名称: MQG-LED-130A-G	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED-130A-G	外型尺寸: 1160*58*70mm	测试编号: 1
制造厂商: CHONON	发光口面: 1.136*0.037	遮光角: N/A


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	89	82	79	88	82	79	87	82	79	75
0.80	96	90	87	95	90	87	94	89	86	83
1.00	100	95	91	99	94	91	98	94	90	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	106	105	98
5.00	115	113	111	113	111	110	109	108	106	99
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2019-04-03

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具等光强曲线

实测参数: U:220.1V I:0.1238A P:26.27W PF:0.9636 实检光通:2666.96x1 lm		
灯具名称: MQG-LED-130A-G	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED-130A-G	外型尺寸: 1160*58*70mm	测试编号: 1
制造厂商: CHONON	发光口面: 1.136*0.037	遮光角: N/A

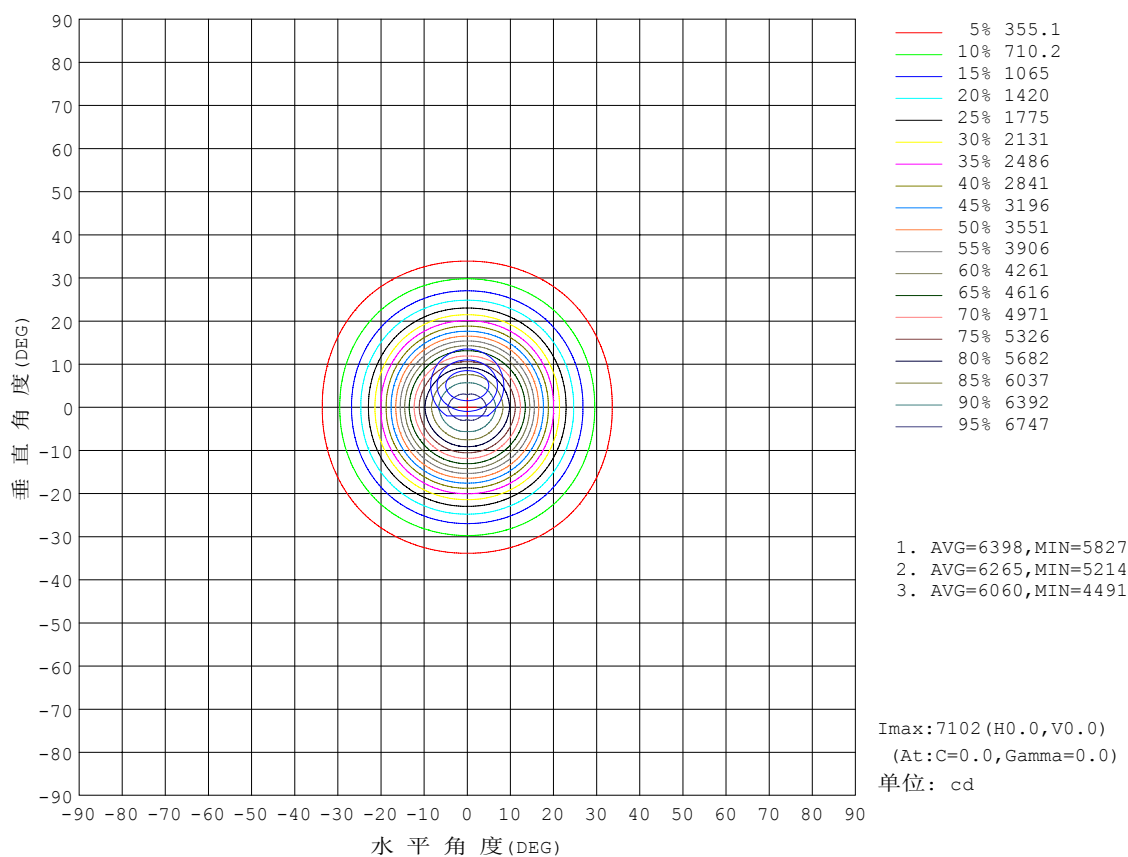


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-04-03

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:220.1V I:0.1238A P:26.27W PF:0.9636 实检光通:2666.96x1 lm		
灯具名称: MQG-LED-130A-G	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED-130A-G	外型尺寸: 1160*58*70mm	测试编号: 1
制造厂商: CHONON	发光口面: 1.136*0.037	遮光角: N/A

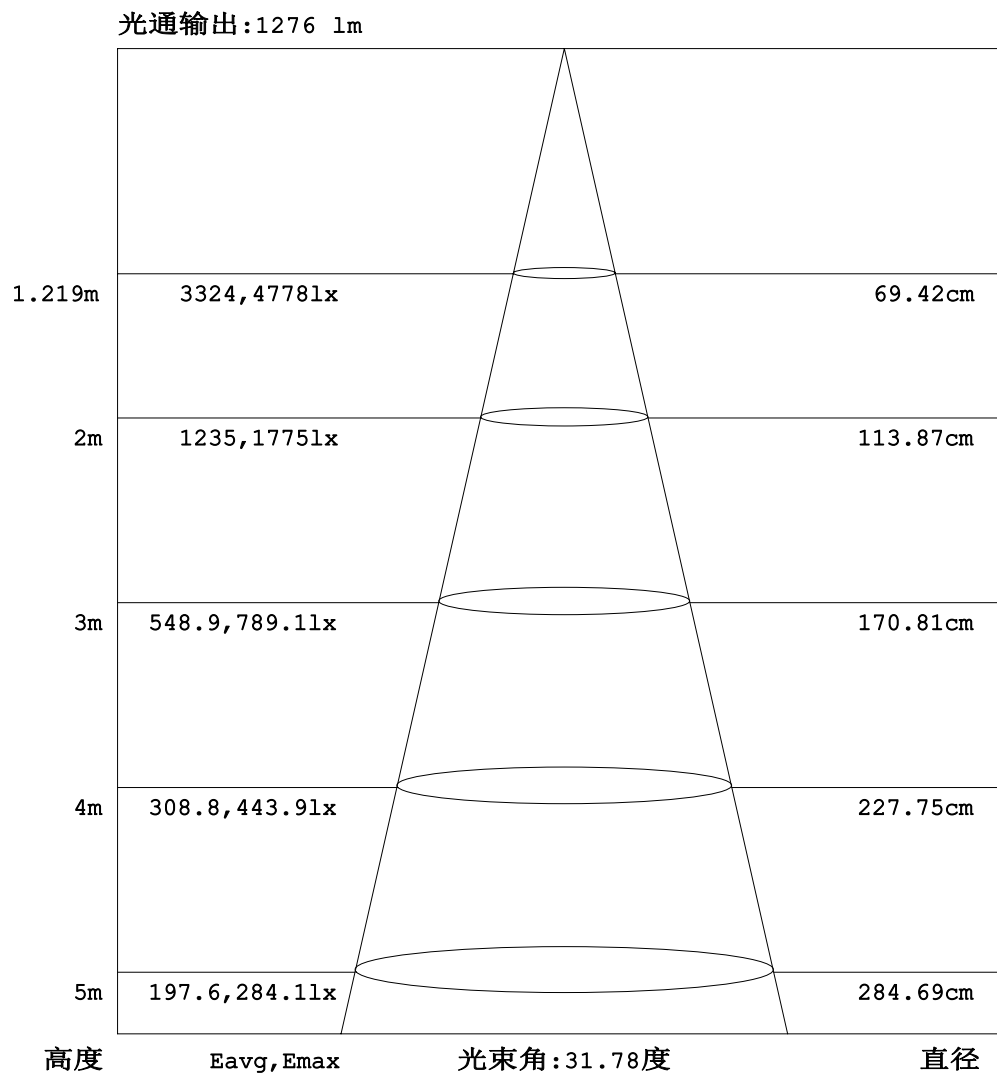


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-04-03

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:220.1V I:0.1238A P:26.27W PF:0.9636 实检光通:2666.96x1 lm		
灯具名称: MQG-LED-130A-G	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED-130A-G	外型尺寸: 1160*58*70mm	测试编号: 1
制造厂商: CHONON	发光口面: 1.136*0.037	遮光角: N/A

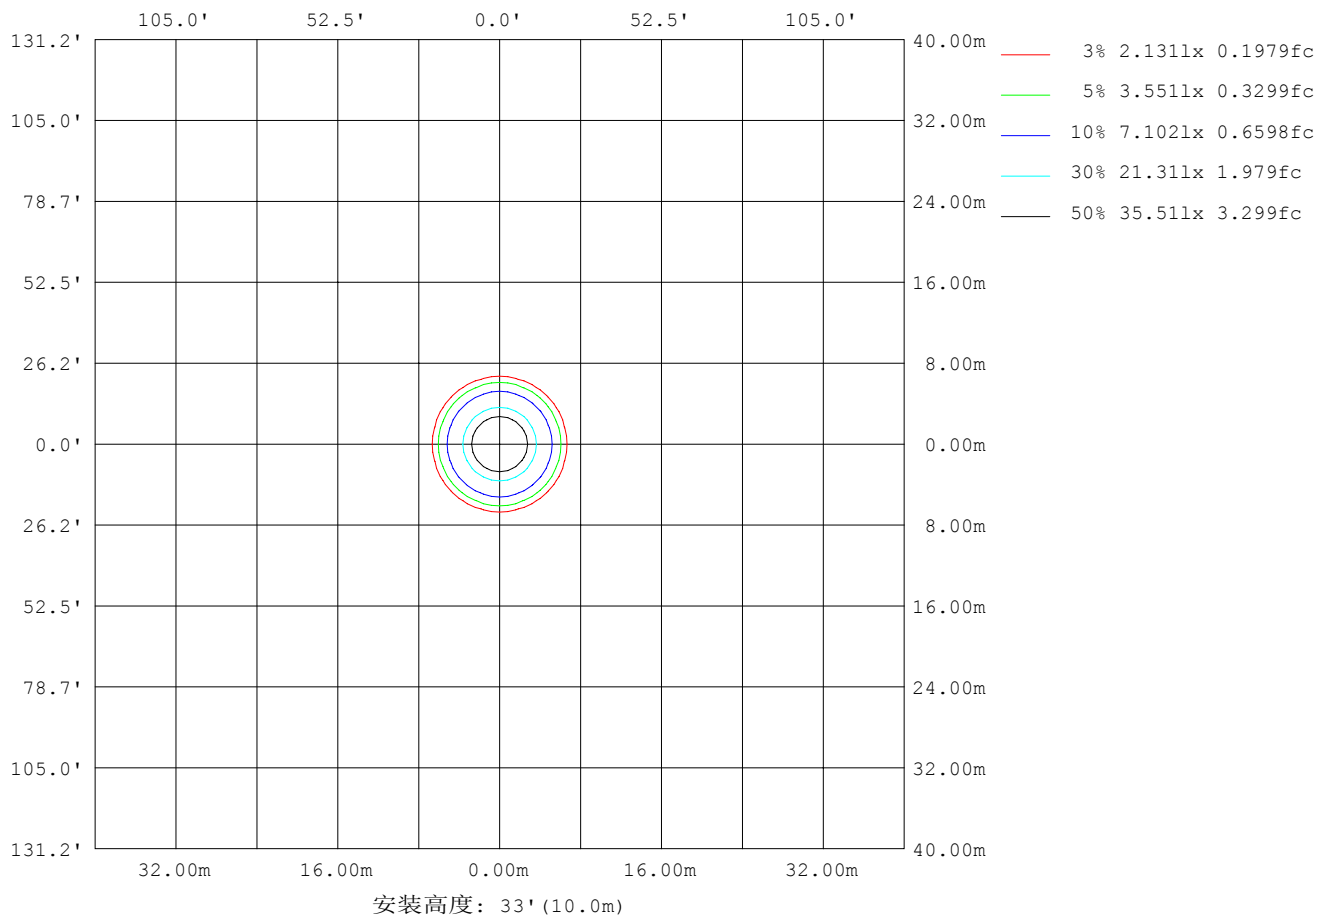

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-04-03

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.1V I:0.1238A P:26.27W PF:0.9636 实检光通:2666.96x1 lm		
灯具名称: MQG-LED-130A-G	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED-130A-G	外型尺寸: 1160*58*70mm	测试编号: 1
制造厂商: CHONON	发光口面: 1.136*0.037	遮光角: N/A


平均亮度	数值(cd/m2)
L横(65)av	462
L横(75)av	0
L横(85)av	0
L纵(65)av	535
L纵(75)av	0
L纵(85)av	0
L45(65)av	567
L45(75)av	37
L45(85)av	0

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-04-03

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

平面照度曲线

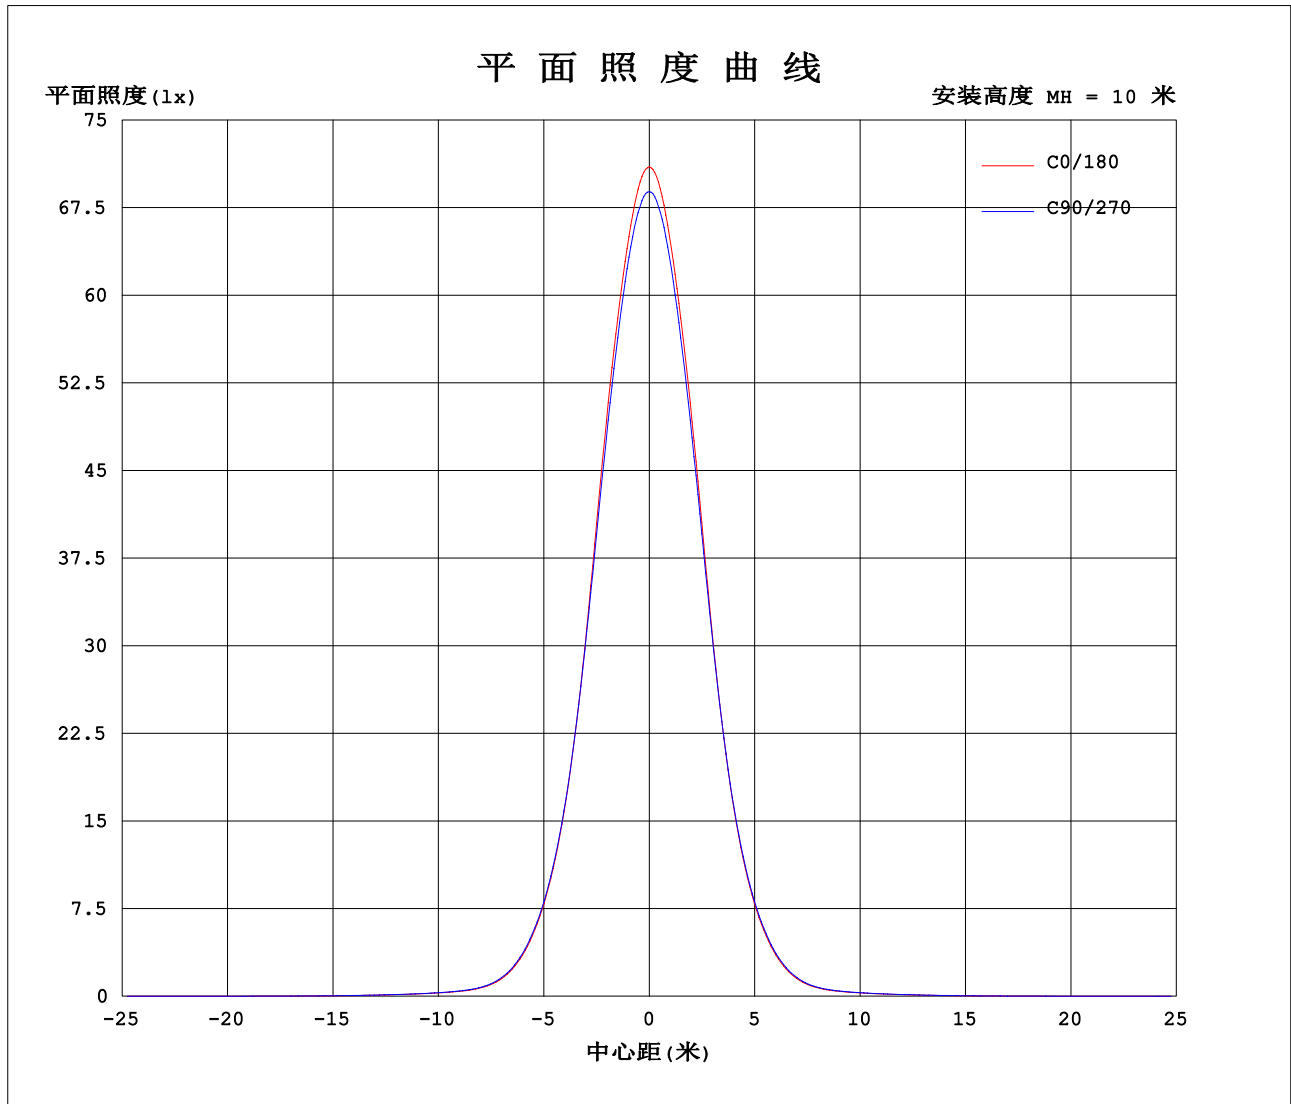

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-04-03

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:220.1V I:0.1238A P:26.27W PF:0.9636 实检光通:2666.96x1 lm		
灯具名称: MQG-LED-130A-G	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQG-LED-130A-G	外型尺寸: 1160*58*70mm	测试编号: 1
制造厂商: CHONON	发光口面: 1.136*0.037	遮光角: N/A

表--1

单位: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	7102	6972	6886	6972	7102	6972	6886	6972										
5	6676	6562	6489	6562	6676	6562	6489	6562										
10	5636	5526	5472	5526	5636	5526	5472	5526										
15	4092	4069	4018	4069	4092	4069	4018	4069										
20	2496	2544	2503	2544	2496	2544	2503	2544										
25	1359	1402	1384	1402	1359	1402	1384	1402										
30	661	687	685	687	661	687	685	687										
35	276	292	293	292	276	292	293	292										
40	127	130	136	130	127	130	136	130										
45	82.5	83.1	87.8	83.1	82.5	83.1	87.8	83.1										
50	57.2	59.5	60.4	59.5	57.2	59.5	60.4	59.5										
55	32.3	39.0	34.4	39.0	32.3	39.0	34.4	39.0										
60	17.1	22.3	18.2	22.3	17.1	22.3	18.2	22.3										
65	8.21	10.1	9.51	10.1	8.21	10.1	9.51	10.1										
70	2.62	4.01	3.40	4.01	2.62	4.01	3.40	4.01										
75	0.00	0.40	0.00	0.40	0.00	0.40	0.00	0.40										
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.01	0.00	0.00	0.00	0.01	0.00										
110	0.02	0.02	0.04	0.02	0.02	0.02	0.04	0.02										
115	0.06	0.09	0.13	0.09	0.06	0.09	0.13	0.09										
120	0.14	0.22	0.32	0.22	0.14	0.22	0.32	0.22										
125	0.31	0.47	0.66	0.47	0.31	0.47	0.66	0.47										
130	0.66	0.93	1.21	0.93	0.66	0.93	1.21	0.93										
135	1.31	1.72	2.02	1.72	1.31	1.72	2.02	1.72										
140	2.44	2.92	3.14	2.92	2.44	2.92	3.14	2.92										
145	4.13	4.52	4.61	4.52	4.13	4.52	4.61	4.52										
150	6.25	6.46	6.36	6.46	6.25	6.46	6.36	6.46										
155	8.58	8.52	8.24	8.52	8.58	8.52	8.24	8.52										
160	10.8	10.5	10.1	10.5	10.8	10.5	10.1	10.5										
165	12.6	12.1	11.8	12.1	12.6	12.1	11.8	12.1										
170	14.0	13.4	13.2	13.4	14.0	13.4	13.2	13.4										
175	14.8	14.3	14.4	14.3	14.8	14.3	14.4	14.3										
180	15.4	14.9	15.1	14.9	15.4	14.9	15.1	14.9										

C角度范围: 0度 - 360度

C角度间隔: 45.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: weijie

测试日期: 2019-04-03

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351

环境湿度: 65.0%

测试距离: 9.490米 [K=1.0000]

备注: