


室内灯具光度数据

实测参数: U:220.1V I:0.1804A P:38.67W PF:0.9736 实检光通:3467.77x1 lm		
灯具名称:MZJ-LED136B	灯具类型:LED 5000K	灯具重量:N/A
灯具规格:MZJ-LED136B	外型尺寸:1235*295*113mm	测试编号:14
制造厂商:CL	发光口面:0.26*1.193	遮光角:N/A

光源数据		光度数据				光效: 89.68 lm/W
型号	3*聚灿2835.88.1320	峰值光强(cd)	1916	S/MH(C0/180)	1.09	
标称功率(W)	38.6694	灯具效率(%)	100.0	S/MH(C90/270)	1.05	
额定电源电压(V)	220	总光通量(lm)	3467.8	η UP, DN(C0-180)	2.3, 47.5	
额定光通量(lm)	3467.77	CIE分类	直接	η UP, DN(C180-360)	2.4, 47.8	
灯具内光源数(只)	1	上射光通比(%)	4.7	CIBSE SHR NOM	1.00	
实测电源电压(V)	220.1	下射光通比(%)	95.3	CIBSE SHR MAX	1.15	

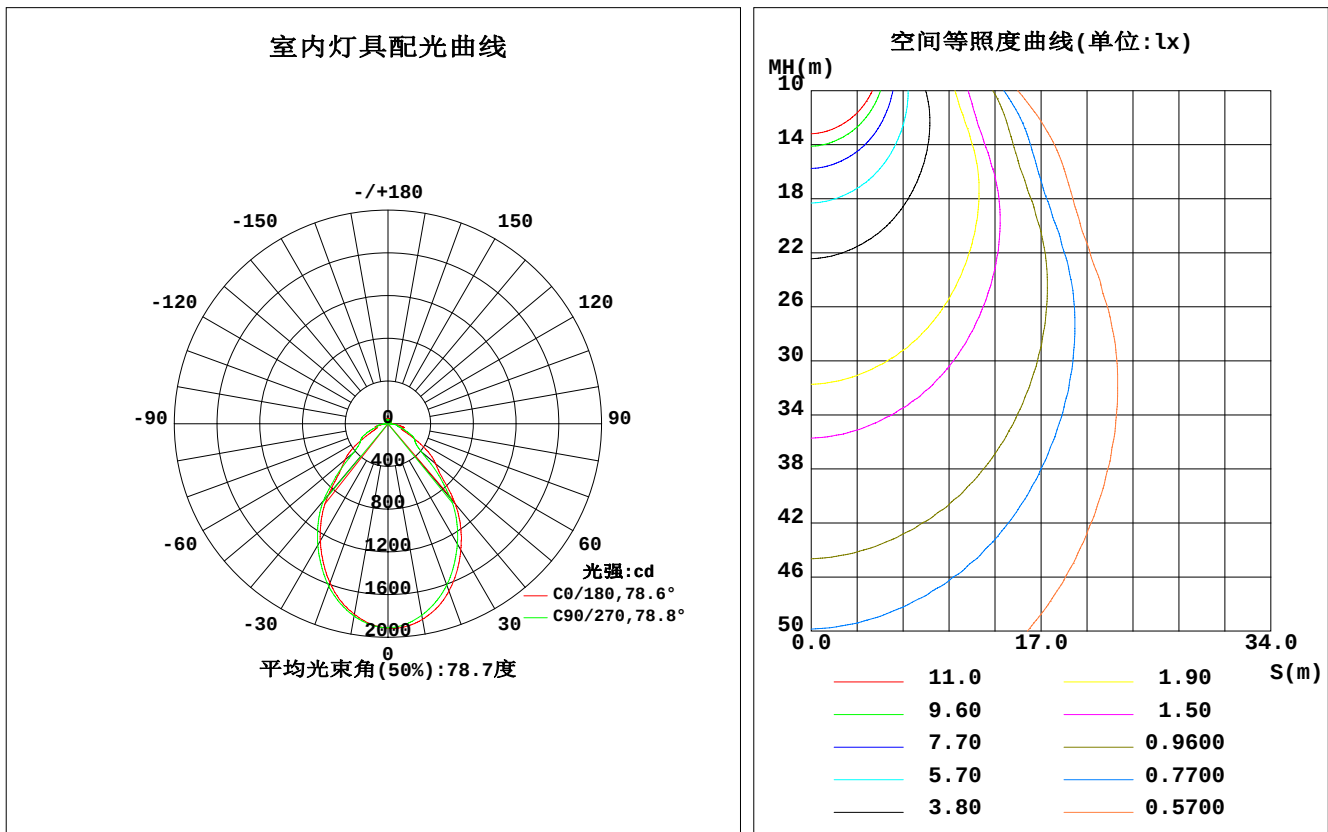

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-08-15

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
5	1881	1888	1889	1892	1907	1893	1885	1879	0- 5	45.42	45.42	1.31,1.31
10	1814	1828	1828	1840	1859	1835	1821	1815	5- 10	133.0	178.4	5.15,5.15
15	1716	1738	1738	1755	1782	1747	1727	1721	10- 15	211.7	390.1	11.2,11.2
20	1588	1616	1620	1638	1669	1628	1609	1596	15- 20	277.0	667.1	19.2,19.2
25	1435	1467	1473	1492	1526	1478	1461	1444	20- 25	324.2	991.3	28.6,28.6
30	1267	1304	1314	1329	1363	1314	1300	1281	25- 30	351.5	1343	38.7,38.7
35	1087	1126	1141	1151	1188	1136	1124	1104	30- 35	359.2	1702	49.1,49.1
40	869.2	920.2	939.0	938.4	981.2	918.8	911.6	891.2	35- 40	343.8	2046	59.59
45	639.0	665.5	672.3	674.5	723.4	640.0	657.1	622.0	40- 45	291.8	2338	67.4,67.4
50	526.0	484.0	425.4	492.9	580.7	483.4	407.8	465.1	45- 50	227.5	2565	74.74
55	404.1	378.9	326.0	380.5	459.5	384.3	317.2	368.7	50- 55	185.5	2751	79.3,79.3
60	249.2	314.2	291.6	319.3	296.8	312.1	284.5	305.8	55- 60	155.4	2906	83.8,83.8
65	146.8	240.9	237.5	246.4	171.9	234.8	227.8	228.7	60- 65	124.5	3031	87.4,87.4
70	113.3	175.3	165.6	184.2	133.1	179.1	156.2	168.6	65- 70	94.21	3125	90.1,90.1
75	124.4	131.2	104.3	136.6	151.2	132.5	99.79	125.4	70- 75	73.49	3198	92.2,92.2
80	82.40	85.78	95.82	92.58	115.0	80.95	87.66	78.84	75- 80	58.94	3257	93.9,93.9
85	38.15	41.57	47.42	49.95	64.27	41.21	36.15	33.73	80- 85	36.24	3294	95.95
90	0.6453	1.373	4.833	4.772	5.828	4.553	4.907	2.043	85- 90	11.68	3305	95.3,95.3
95	2.683	2.693	5.832	5.653	1.673	5.810	6.380	4.586	90- 95	1.940	3307	95.4,95.4
100	6.864	6.214	8.569	7.974	5.156	8.360	9.543	8.378	95-100	3.211	3310	95.5,95.5
105	13.35	10.33	12.68	10.96	10.76	12.02	14.00	12.77	100-105	5.283	3316	95.6,95.6
110	22.06	16.35	17.36	15.02	18.89	16.33	18.42	18.79	105-110	7.782	3323	95.8,95.8
115	24.92	21.95	22.05	18.15	24.05	19.13	23.69	24.46	110-115	10.08	3333	96.1,96.1
120	25.48	32.31	28.96	22.67	26.66	22.84	29.94	31.32	115-120	11.91	3345	96.5,96.5
125	26.96	41.60	31.50	27.48	29.55	27.77	33.31	41.63	120-125	13.93	3359	96.9,96.9
130	28.47	52.26	40.17	33.05	32.87	31.66	39.56	51.37	125-130	15.81	3375	97.3,97.3
135	29.53	47.70	45.17	28.56	35.14	28.72	44.52	46.36	130-135	15.32	3390	97.8,97.8
140	30.87	48.54	51.18	28.73	37.35	28.78	48.12	46.91	135-140	14.60	3405	98.2,98.2
145	36.97	50.93	48.89	29.32	42.20	29.51	39.86	48.87	140-145	13.50	3419	98.6,98.6
150	40.74	52.08	39.01	29.05	45.00	29.61	38.53	49.77	145-150	11.92	3430	98.9,98.9
155	43.51	54.49	40.26	33.97	46.50	34.45	40.00	50.65	150-155	10.49	3441	99.2,99.2
160	48.03	54.94	40.89	38.57	49.28	39.16	37.88	50.90	155-160	9.221	3450	99.5,99.5
165	50.32	54.43	43.80	42.51	50.85	43.20	39.63	50.70	160-165	7.620	3458	99.7,99.7
170	49.11	53.33	41.48	46.36	49.67	46.97	32.98	50.25	165-170	5.570	3463	99.9,99.9
175	50.51	52.01	34.45	48.03	50.99	48.99	33.53	49.58	170-175	3.290	3467	100,100
180	52.20	50.29	33.40	49.10	52.29	50.22	33.41	49.15	175-180	1.101	3468	100,100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 2337.7 lm

%lum = 67.4%

%lamp = 67.4%

锥面光通量(120度): 2906.1 lm

%lum = 83.8%


%lamp = 83.8%

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2019-08-15

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具亮度限制曲线

实测参数: U:220.1V I:0.1804A P:38.67W PF:0.9736 实检光通:3467.77x1 lm		
灯具名称: MZJ-LED136B	灯具类型: LED 5000K	灯具重量: N/A
灯具规格: MZJ-LED136B	外型尺寸: 1235*295*113mm	测试编号: 14
制造厂商: CL	发光口面: 0.26*1.193	遮光角: N/A

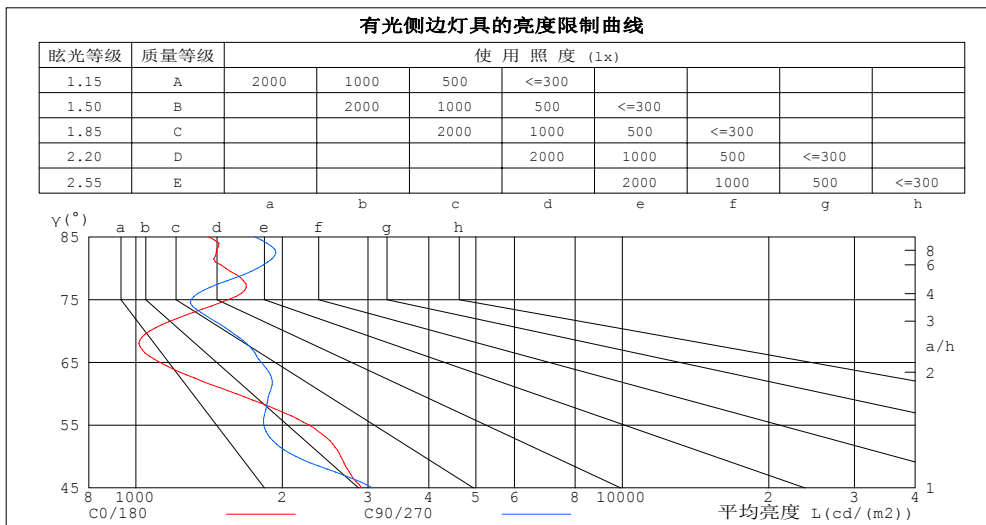

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	1411	1754
80	1530	1779
75	1549	1299
70	1068	1561
65	1120	1812
60	1607	1880
55	2271	1832
50	2638	2134
45	2913	3065


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-08-15

γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:220.1V I:0.1804A P:38.67W PF:0.9736 实检光通:3467.77x1 lm		
灯具名称: MZJ-LED136B	灯具类型: LED 5000K	灯具重量: N/A
灯具规格: MZJ-LED136B	外型尺寸: 1235*295*113mm	测试编号: 14
制造厂商: CL	发光口面: 0.26*1.193	遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.03	1.03	1.03	.98	.98	.98	.95
1.0	1.05	1.02	.98	1.03	.99	.96	.98	.95	.93	.93	.91	.89	.89	.87	.85	.83
2.0	.94	.88	.83	.92	.87	.82	.88	.83	.79	.84	.80	.77	.80	.77	.75	.72
3.0	.84	.77	.72	.83	.76	.71	.79	.74	.69	.76	.71	.67	.73	.69	.66	.64
4.0	.76	.69	.63	.75	.68	.62	.72	.66	.61	.69	.64	.60	.66	.62	.58	.56
5.0	.69	.62	.56	.68	.61	.55	.66	.59	.54	.63	.58	.53	.61	.56	.52	.50
6.0	.63	.55	.50	.62	.55	.49	.60	.54	.49	.58	.52	.48	.56	.51	.47	.45
7.0	.58	.50	.45	.57	.50	.45	.55	.49	.44	.54	.48	.43	.52	.47	.43	.41
8.0	.54	.46	.41	.53	.46	.41	.51	.45	.40	.50	.44	.40	.48	.43	.39	.37
9.0	.50	.42	.37	.49	.42	.37	.48	.41	.37	.46	.40	.36	.45	.40	.36	.34
10.0	.46	.39	.34	.46	.39	.34	.44	.38	.34	.43	.37	.33	.42	.37	.33	.31

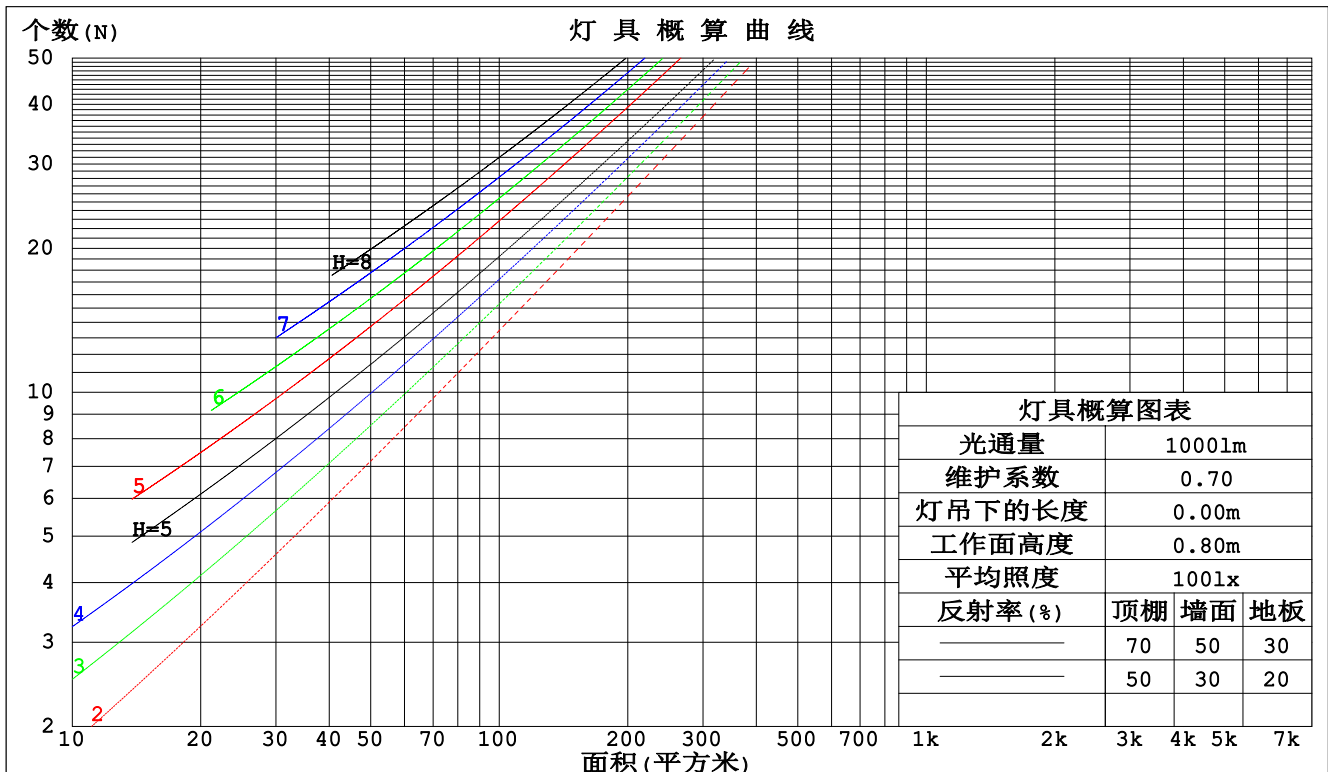

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2019-08-15

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

墙面和天花板利用系数

实测参数: U:220.1V I:0.1804A P:38.67W PF:0.9736 实检光通:3467.77x1 lm					
灯具名称: MZJ-LED136B			灯具类型: LED 5000K		灯具重量: N/A
灯具规格: MZJ-LED136B			外型尺寸: 1235*295*113mm		测试编号: 14
制造厂商: CL			发光口面: 0.26*1.193		遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.261	.148	.047	.253	.144	.046	.237	.136	.043	.223	.128	.041	.209	.121	.039	
2.0	.246	.135	.041	.239	.132	.041	.225	.125	.039	.212	.119	.037	.201	.113	.036	
3.0	.230	.122	.037	.223	.120	.036	.211	.114	.035	.200	.110	.034	.190	.105	.032	
4.0	.214	.111	.033	.209	.109	.032	.198	.105	.031	.188	.101	.030	.178	.097	.030	
5.0	.200	.102	.030	.195	.100	.029	.186	.097	.028	.177	.093	.028	.168	.090	.027	
6.0	.188	.094	.027	.183	.092	.027	.174	.089	.026	.166	.086	.025	.159	.084	.025	
7.0	.176	.087	.025	.172	.086	.024	.164	.083	.024	.157	.080	.023	.150	.078	.023	
8.0	.166	.081	.023	.162	.080	.023	.155	.078	.022	.148	.075	.022	.142	.073	.021	
9.0	.157	.076	.021	.153	.075	.021	.147	.073	.021	.141	.071	.020	.135	.069	.020	
10.0	.148	.071	.020	.145	.070	.020	.139	.068	.019	.134	.066	.019	.129	.065	.019	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.226	.226	.226	.193	.193	.193	.132	.132	.132	.076	.076	.076	.024	.024	.024	
1.0	.213	.193	.174	.182	.165	.150	.125	.114	.104	.072	.066	.060	.023	.021	.020	
2.0	.202	.168	.140	.173	.145	.121	.119	.100	.084	.069	.058	.049	.022	.019	.016	
3.0	.193	.150	.116	.166	.130	.101	.114	.090	.071	.066	.053	.042	.021	.017	.014	
4.0	.185	.137	.100	.159	.118	.087	.109	.082	.061	.063	.048	.036	.020	.016	.012	
5.0	.177	.126	.088	.152	.109	.077	.105	.076	.054	.061	.045	.032	.020	.015	.011	
6.0	.170	.118	.080	.146	.102	.069	.101	.071	.049	.059	.042	.029	.019	.014	.010	
7.0	.164	.111	.073	.141	.096	.064	.097	.067	.045	.057	.040	.027	.018	.013	.009	
8.0	.158	.105	.068	.136	.091	.059	.094	.064	.042	.055	.038	.025	.018	.012	.008	
9.0	.152	.100	.064	.131	.087	.056	.091	.061	.040	.053	.036	.024	.017	.012	.008	
10.0	.147	.096	.061	.127	.083	.053	.088	.058	.038	.051	.035	.023	.017	.011	.008	

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-08-15

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.1V I:0.1804A P:38.67W PF:0.9736 实检光通:3467.77x1 lm										
灯具名称: MZJ-LED136B					灯具类型: LED 5000K			灯具重量: N/A		
灯具规格: MZJ-LED136B					外型尺寸: 1235*295*113mm			测试编号: 14		
制造厂商: CL					发光口面: 0.26*1.193			遮光角: N/A		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	14.2	15.5	14.5	15.7	16.0	14.3	15.5	14.6	15.8	16.1
3H	14.7	15.9	15.1	16.2	16.5	15.3	16.4	15.6	16.7	17.0
4H	15.2	16.3	15.5	16.6	16.9	15.6	16.7	16.0	17.0	17.4
6H	15.7	16.7	16.1	17.1	17.4	16.0	17.1	16.4	17.4	17.8
8H	15.9	16.8	16.3	17.2	17.6	16.3	17.3	16.7	17.6	18.0
12H	16.0	16.9	16.4	17.3	17.7	16.5	17.4	16.9	17.8	18.2
4H 2H	14.6	15.7	14.9	16.0	16.3	14.7	15.8	15.0	16.1	16.4
3H	15.3	16.3	15.7	16.7	17.0	15.8	16.8	16.3	17.2	17.6
4H	16.0	16.9	16.4	17.2	17.7	16.3	17.2	16.8	17.6	18.0
6H	16.7	17.4	17.1	17.9	18.3	16.9	17.7	17.4	18.1	18.6
8H	16.9	17.6	17.4	18.0	18.5	17.3	18.0	17.7	18.4	18.9
12H	17.1	17.7	17.5	18.2	18.7	17.5	18.2	18.0	18.6	19.1
8H 4H	16.3	17.0	16.7	17.4	17.9	16.5	17.3	17.0	17.7	18.2
6H	17.1	17.7	17.6	18.2	18.7	17.3	17.9	17.9	18.4	18.9
8H	17.4	17.9	17.9	18.4	19.0	17.8	18.3	18.3	18.8	19.4
12H	17.7	18.1	18.2	18.6	19.2	18.1	18.6	18.7	19.1	19.7
12H 4H	16.3	16.9	16.8	17.4	17.9	16.6	17.2	17.1	17.7	18.2
6H	17.2	17.7	17.7	18.2	18.7	17.4	17.9	17.9	18.4	19.0
8H	17.5	18.0	18.1	18.5	19.1	17.9	18.3	18.4	18.9	19.4
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.5				
1.5H	+ 0.2 / - 0.3					+ 0.4 / - 0.5				
2.0H	+ 0.6 / - 0.7					+ 0.6 / - 0.4				

依据CIE Pub.117计算, 表格已按3468lm光源光通进行修正 ($81\log(F/F_0) = 4.3$) .

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-08-15

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:220.1V I:0.1804A P:38.67W PF:0.9736 实检光通:3467.77x1 lm		
灯具名称: MZJ-LED136B	灯具类型: LED 5000K	灯具重量: N/A
灯具规格: MZJ-LED136B	外型尺寸: 1235*295*113mm	测试编号: 14
制造厂商: CL	发光口面: 0.26*1.193	遮光角: N/A


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	66	56	50	65	56	50	64	55	50	44
0.80	75	66	60	74	65	59	72	64	59	53
1.00	83	74	68	81	73	67	79	73	66	60
1.25	89	80	74	87	79	74	84	78	73	66
1.50	93	85	79	91	84	79	88	82	77	70
2.00	99	92	86	97	90	85	93	87	83	75
2.50	102	95	90	99	94	89	95	90	87	78
3.00	104	99	94	102	97	93	97	93	90	81
4.00	108	103	99	105	101	97	100	97	94	84
5.00	110	106	102	107	103	100	102	99	96	86
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2019-08-15

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具等光强曲线

实测参数: U:220.1V I:0.1804A P:38.67W PF:0.9736 实检光通:3467.77x1 lm		
灯具名称: MZJ-LED136B	灯具类型: LED 5000K	灯具重量: N/A
灯具规格: MZJ-LED136B	外型尺寸: 1235*295*113mm	测试编号: 14
制造厂商: CL	发光口面: 0.26*1.193	遮光角: N/A

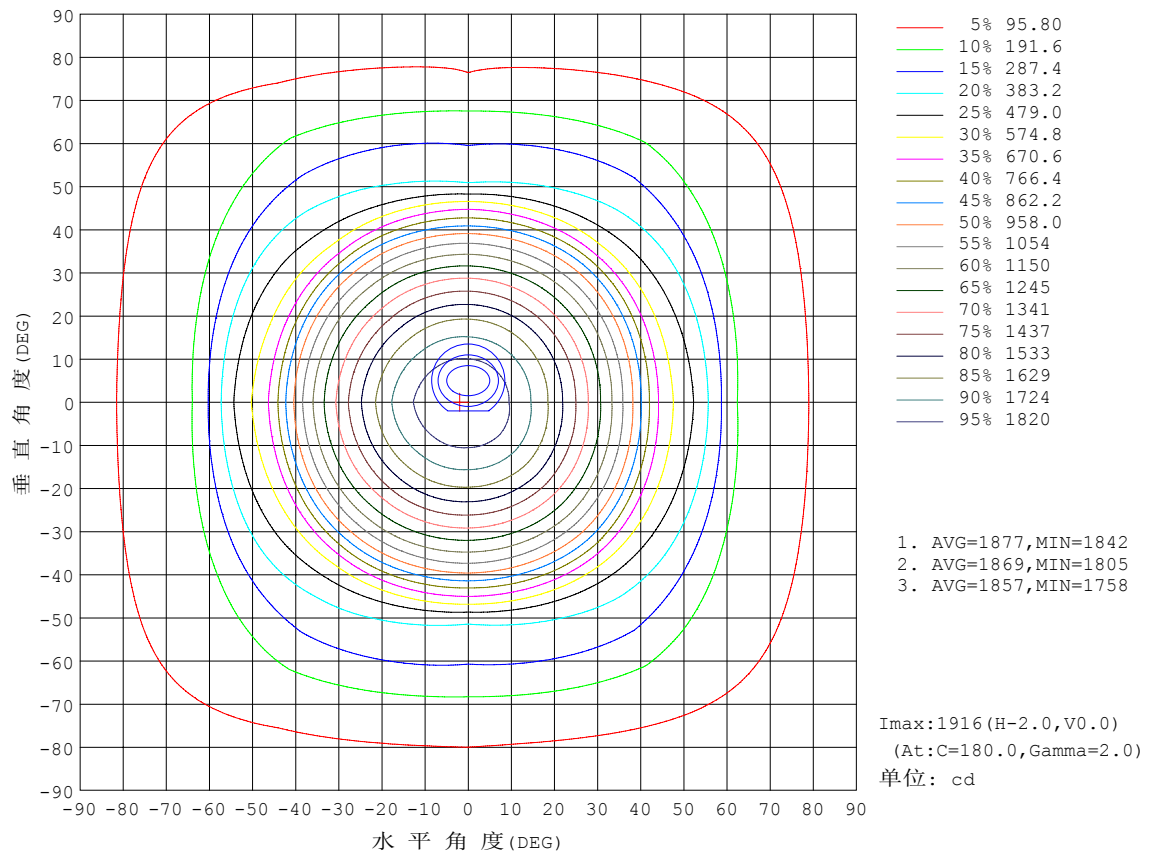


C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-08-15

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:220.1V I:0.1804A P:38.67W PF:0.9736 实检光通:3467.77x1 lm		
灯具名称: MZJ-LED136B	灯具类型: LED 5000K	灯具重量: N/A
灯具规格: MZJ-LED136B	外型尺寸: 1235*295*113mm	测试编号: 14
制造厂商: CL	发光口面: 0.26*1.193	遮光角: N/A

光通输出: 2013 lm

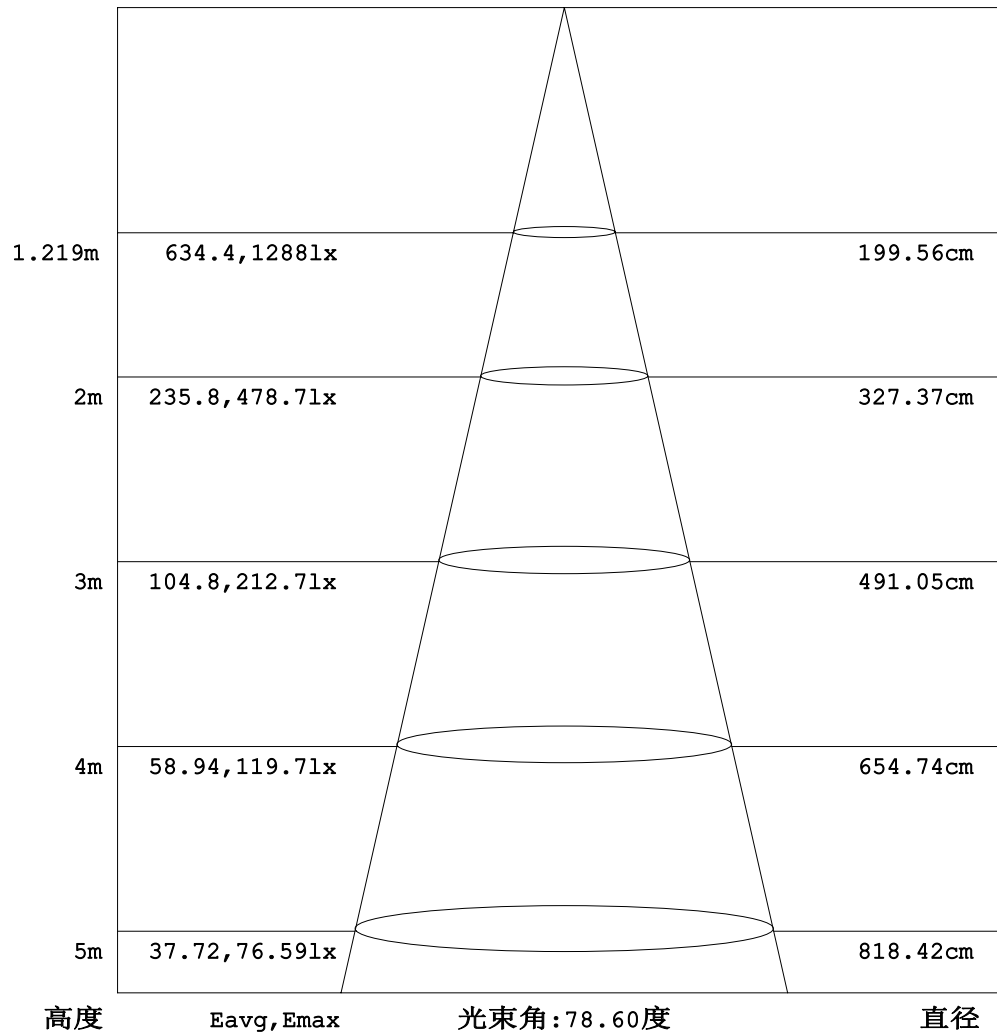


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
 C角度间隔: 45.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: weijie
 测试日期: 2019-08-15

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

平面等照度曲线

实测参数: U:220.1V I:0.1804A P:38.67W PF:0.9736 实检光通:3467.77x1 lm		
灯具名称: MZJ-LED136B	灯具类型: LED 5000K	灯具重量: N/A
灯具规格: MZJ-LED136B	外型尺寸: 1235*295*113mm	测试编号: 14
制造厂商: CL	发光口面: 0.26*1.193	遮光角: N/A

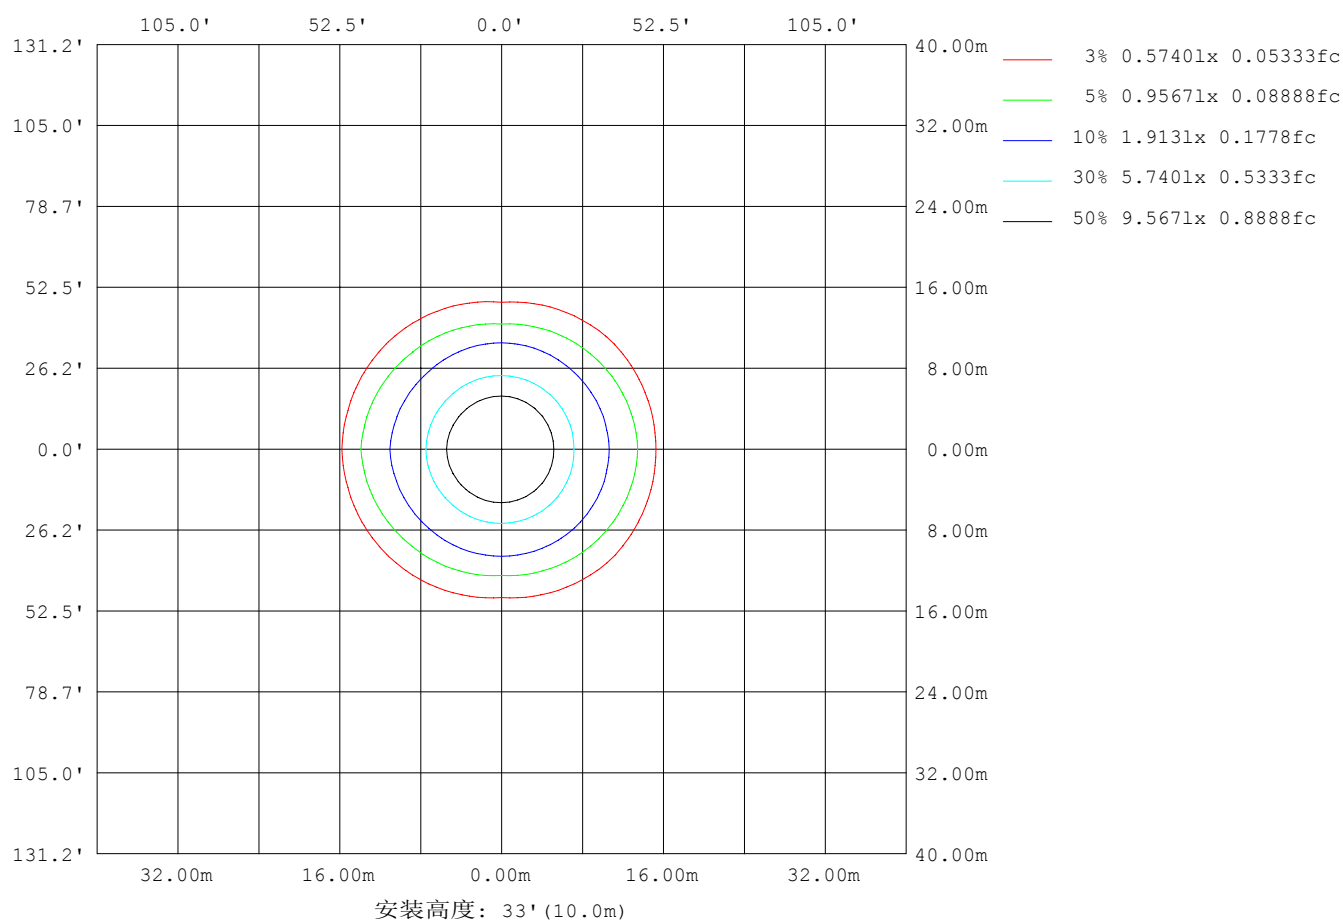

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-08-15

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.1V I:0.1804A P:38.67W PF:0.9736 实检光通:3467.77x1 lm		
灯具名称: MZJ-LED136B	灯具类型: LED 5000K	灯具重量: N/A
灯具规格: MZJ-LED136B	外型尺寸: 1235*295*113mm	测试编号: 14
制造厂商: CL	发光口面: 0.26*1.193	遮光角: N/A


平均亮度	数值(cd/m2)
L横(65)av	1216
L横(75)av	1716
L横(85)av	1894
L纵(65)av	1775
L纵(75)av	1271
L纵(85)av	1546
L45(65)av	1813
L45(75)av	1637
L45(85)av	1539

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-08-15

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

平面照度曲线

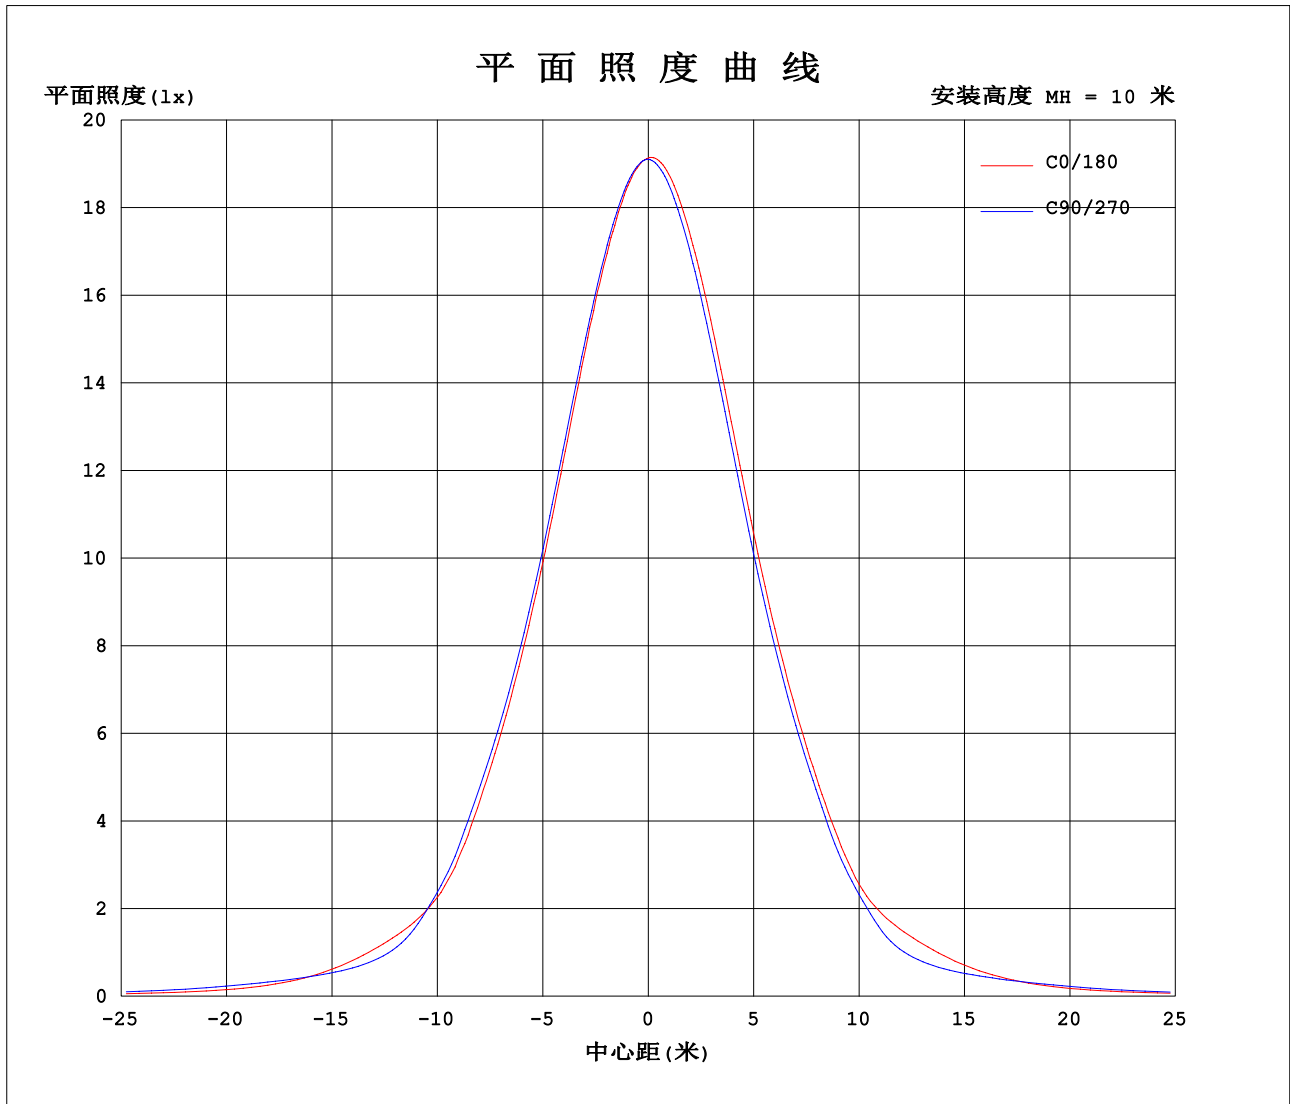

C角度范围: 0度 - 360度
C角度间隔: 45.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: weijie
测试日期: 2019-08-15

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:220.1V I:0.1804A P:38.67W PF:0.9736 实检光通:3467.77x1 lm		
灯具名称: MZJ-LED136B	灯具类型: LED 5000K	灯具重量: N/A
灯具规格: MZJ-LED136B	外型尺寸: 1235*295*113mm	测试编号: 14
制造厂商: CL	发光口面: 0.26*1.193	遮光角: N/A

表--1

单位: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1913	1912	1911	1908	1913	1912	1911	1908										
5	1881	1888	1889	1892	1907	1893	1885	1879										
10	1814	1828	1828	1840	1859	1835	1821	1815										
15	1716	1738	1738	1755	1782	1747	1727	1721										
20	1588	1616	1620	1638	1669	1628	1609	1596										
25	1435	1467	1473	1492	1526	1478	1461	1444										
30	1267	1304	1314	1329	1363	1314	1300	1281										
35	1087	1126	1141	1151	1188	1136	1124	1104										
40	869	920	939	938	981	919	912	891										
45	639	666	672	675	723	640	657	622										
50	526	484	425	493	581	483	408	465										
55	404	379	326	381	460	384	317	369										
60	249	314	292	319	297	312	285	306										
65	147	241	238	246	172	235	228	229										
70	113	175	166	184	133	179	156	169										
75	124	131	104	137	151	132	99.8	125										
80	82.4	85.8	95.8	92.6	115	80.9	87.7	78.8										
85	38.1	41.6	47.4	50.0	64.3	41.2	36.2	33.7										
90	0.65	1.37	4.83	4.77	5.83	4.55	4.91	2.04										
95	2.68	2.69	5.83	5.65	1.67	5.81	6.38	4.59										
100	6.86	6.21	8.57	7.97	5.16	8.36	9.54	8.38										
105	13.4	10.3	12.7	11.0	10.8	12.0	14.0	12.8										
110	22.1	16.4	17.4	15.0	18.9	16.3	18.4	18.8										
115	24.9	22.0	22.1	18.2	24.1	19.1	23.7	24.5										
120	25.5	32.3	29.0	22.7	26.7	22.8	29.9	31.3										
125	27.0	41.6	31.5	27.5	29.5	27.8	33.3	41.6										
130	28.5	52.3	40.2	33.0	32.9	31.7	39.6	51.4										
135	29.5	47.7	45.2	28.6	35.1	28.7	44.5	46.4										
140	30.9	48.5	51.2	28.7	37.4	28.8	48.1	46.9										
145	37.0	50.9	48.9	29.3	42.2	29.5	39.9	48.9										
150	40.7	52.1	39.0	29.0	45.0	29.6	38.5	49.8										
155	43.5	54.5	40.3	34.0	46.5	34.4	40.0	50.6										
160	48.0	54.9	40.9	38.6	49.3	39.2	37.9	50.9										
165	50.3	54.4	43.8	42.5	50.8	43.2	39.6	50.7										
170	49.1	53.3	41.5	46.4	49.7	47.0	33.0	50.2										
175	50.5	52.0	34.5	48.0	51.0	49.0	33.5	49.6										
180	52.2	50.3	33.4	49.1	52.3	50.2	33.4	49.2										

C角度范围: 0度 - 360度

C角度间隔: 45.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: weijie

测试日期: 2019-08-15

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.351

环境湿度: 65.0%

测试距离: 9.490米 [K=1.0000]

备注: