


室内灯具光度数据

实测参数: U:220.03V I:0.1594A P:34.014W PF:0.9696 Freq:50.00Hz 实检光通:3844.51x1 lm		
灯具名称: MZJ-LED-140P	灯具类型: LED 5700K	灯具重量: N/A
灯具规格: MZJ-LED-140P	外型尺寸: 1193*70*60mm	测试编号: 20
制造厂商: CL	发光口面: 1.185*0.07	遮光角: N/A

光源数据		光度数据				光效: 113.03 lm/W
型号	J2835.264.1320	峰值光强(cd)	1184	S/MH(C0/180)	1.27	
标称功率(W)	34.0144	灯具效率(%)	100.0	S/MH(C90/270)	1.25	
额定电源电压(V)	220	总光通量(lm)	3844.5	η UP, DN(C0-180)	3.3, 46.6	
额定光通量(lm)	3844.51	CIE分类	直接	η UP, DN(C180-360)	3.2, 46.9	
灯具内光源数(只)	1	上射光通比(%)	6.5	CIBSE SHR NOM	1.25	
实测电源电压(V)	220.1	下射光通比(%)	93.5	CIBSE SHR MAX	1.35	

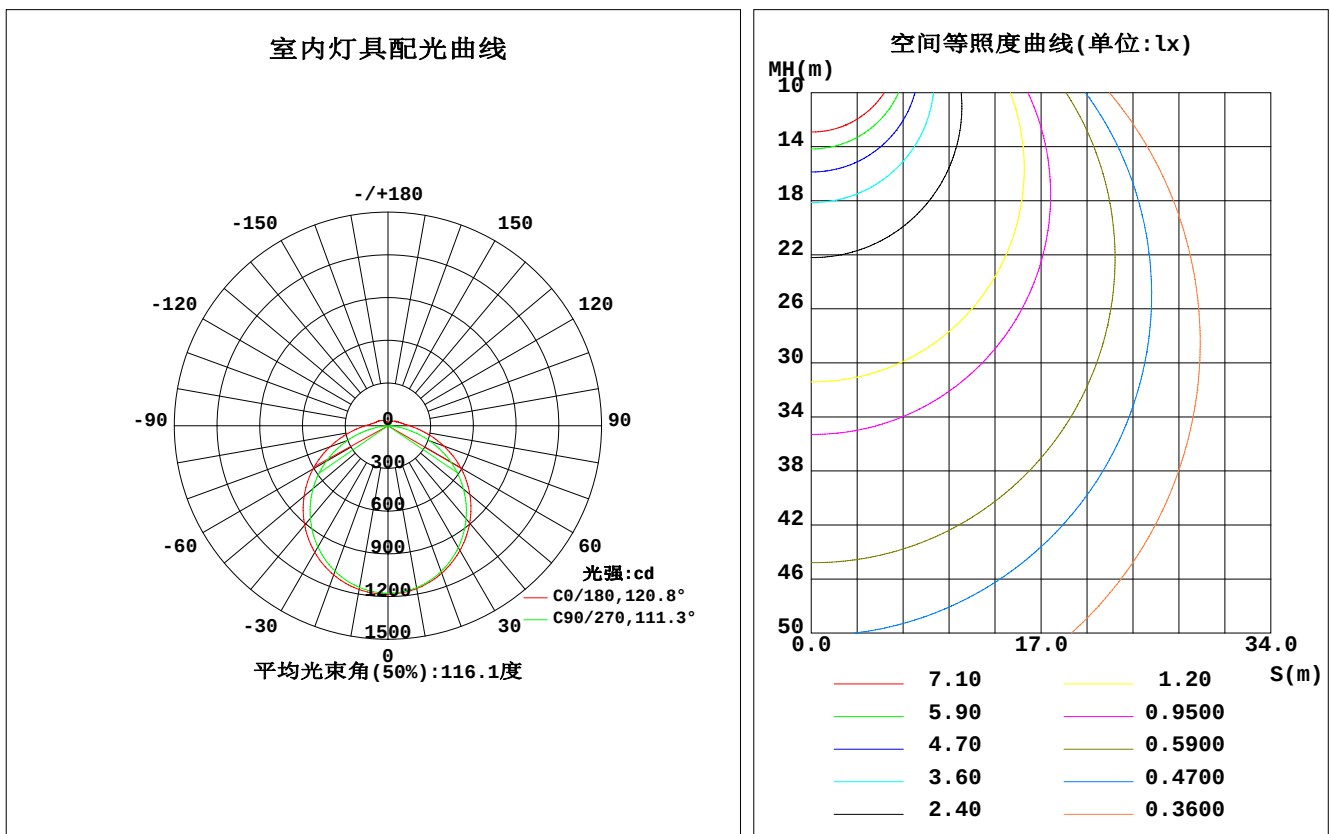

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WJ
测试日期: 2020-03-31

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.366
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
10	1168	1164	1153	1147	1161	1153	1154	1161	0- 10	111.5	111.5	2.9,2.9
20	1115	1109	1087	1081	1103	1088	1090	1108	10- 20	319.5	430.9	11.2,11.2
30	1028	1017	983.9	980.6	1011	988.2	987.7	1017	20- 30	485.5	916.5	23.8,23.8
40	910.6	894.2	847.7	851.2	892.1	859.6	852.9	895.8	30- 40	589.3	1506	39.2,39.2
50	769.3	746.1	686.5	699.4	750.6	707.5	692.2	748.6	40- 50	619.5	2125	55.3,55.3
60	607.6	576.1	501.9	527.6	590.0	536.8	510.2	581.2	50- 60	573.8	2699	70.2,70.2
70	435.1	391.7	302.3	344.0	417.3	354.6	312.0	400.0	60- 70	458.4	3158	82.1,82.1
80	274.2	210.6	107.1	173.5	259.4	184.2	115.0	224.0	70- 80	296.1	3454	89.8,89.8
90	161.1	89.42	0.8156	76.51	152.2	81.43	0.9957	99.20	80- 90	142.3	3596	93.5,93.5
100	105.5	59.17	1.917	52.22	100.4	53.06	2.200	58.54	90-100	72.10	3668	95.4,95.4
110	84.32	49.40	3.557	43.13	78.63	42.77	3.729	47.45	100-110	51.89	3720	96.8,96.8
120	70.98	40.42	5.631	36.31	62.66	37.07	5.596	39.78	110-120	40.68	3761	97.8,97.8
130	58.97	31.24	7.647	31.20	50.93	31.96	7.506	31.26	120-130	31.21	3792	98.6,98.6
140	47.99	23.70	9.568	26.42	41.91	27.07	9.288	24.73	130-140	22.25	3814	99.2,99.2
150	37.29	20.21	12.12	21.66	32.27	20.23	12.04	20.79	140-150	14.97	3829	99.6,99.6
160	28.47	17.16	14.40	16.80	23.41	17.13	14.28	17.55	150-160	9.291	3838	99.8,99.8
170	20.95	15.00	16.14	15.30	15.48	15.35	16.08	15.65	160-170	4.755	3843	100,100
180	12.09	16.58	17.14	16.83	12.14	16.62	17.09	16.80	170-180	1.471	3845	100,100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 1816.6 lm

%lum = 47.3%

%lamp = 47.3%

锥面光通量(120度): 2699.1 lm

%lum = 70.2%

%lamp = 70.2%

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: WJ
 测试日期: 2020-03-31


γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.366
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具亮度限制曲线

实测参数: U:220.03V I:0.1594A P:34.014W PF:0.9696 Freq:50.00Hz 实检光通:3844.51x1 lm		
灯具名称: MZJ-LED-140P	灯具类型: LED 5700K	灯具重量: N/A
灯具规格: MZJ-LED-140P	外型尺寸: 1193*70*60mm	测试编号: 20
制造厂商: CL	发光口面: 1.185*0.07	遮光角: N/A

有光侧边灯具的亮度限制曲线

眩光等级	质量等级	使用照度 (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

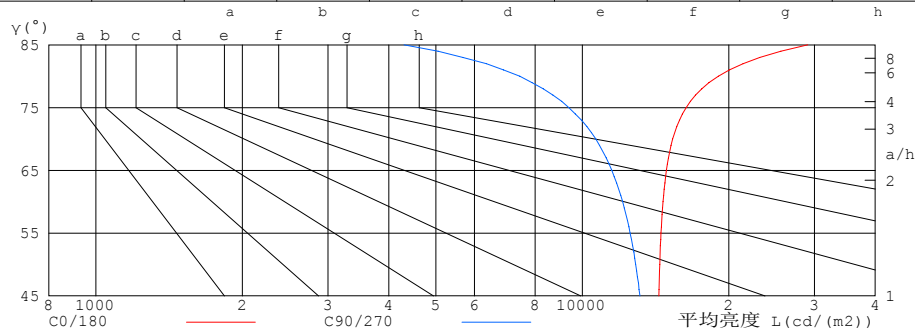

平均亮度值 cd/(m²)		
γ(°)	C0/180	C90/270
85	29067	4301
80	19039	7436
75	16347	9380
70	15337	10655
65	14886	11497
60	14650	12101
55	14510	12537
50	14427	12875
45	14368	13136


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WJ
测试日期: 2020-03-31

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.366
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:220.03V I:0.1594A P:34.014W PF:0.9696 Freq:50.00Hz 实检光通:3844.51x1 lm		
灯具名称: MZJ-LED-140P	灯具类型: LED 5700K	灯具重量: N/A
灯具规格: MZJ-LED-140P	外型尺寸: 1193*70*60mm	测试编号: 20
制造厂商: CL	发光口面: 1.185*0.07	遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.18	1.18	1.18	1.14	1.14	1.14	1.08	1.08	1.08	1.02	1.02	1.02	.96	.96	.96	.94
1.0	1.01	.96	.92	.98	.94	.90	.93	.89	.86	.88	.85	.82	.83	.81	.79	.76
2.0	.88	.80	.74	.85	.78	.73	.80	.75	.70	.76	.72	.68	.72	.68	.65	.63
3.0	.77	.68	.61	.74	.67	.60	.71	.64	.58	.67	.61	.57	.63	.59	.55	.52
4.0	.68	.59	.52	.66	.57	.51	.62	.55	.50	.59	.53	.48	.56	.51	.47	.44
5.0	.60	.51	.44	.59	.50	.44	.56	.48	.43	.53	.47	.42	.51	.45	.41	.38
6.0	.54	.45	.38	.53	.44	.38	.50	.43	.37	.48	.41	.36	.46	.40	.36	.33
7.0	.49	.40	.34	.48	.39	.34	.46	.38	.33	.44	.37	.32	.42	.36	.31	.29
8.0	.45	.36	.30	.44	.35	.30	.42	.34	.29	.40	.33	.29	.38	.33	.28	.26
9.0	.41	.33	.27	.40	.32	.27	.38	.31	.26	.37	.30	.26	.35	.30	.25	.23
10.0	.38	.30	.24	.37	.29	.24	.35	.29	.24	.34	.28	.23	.33	.27	.23	.21

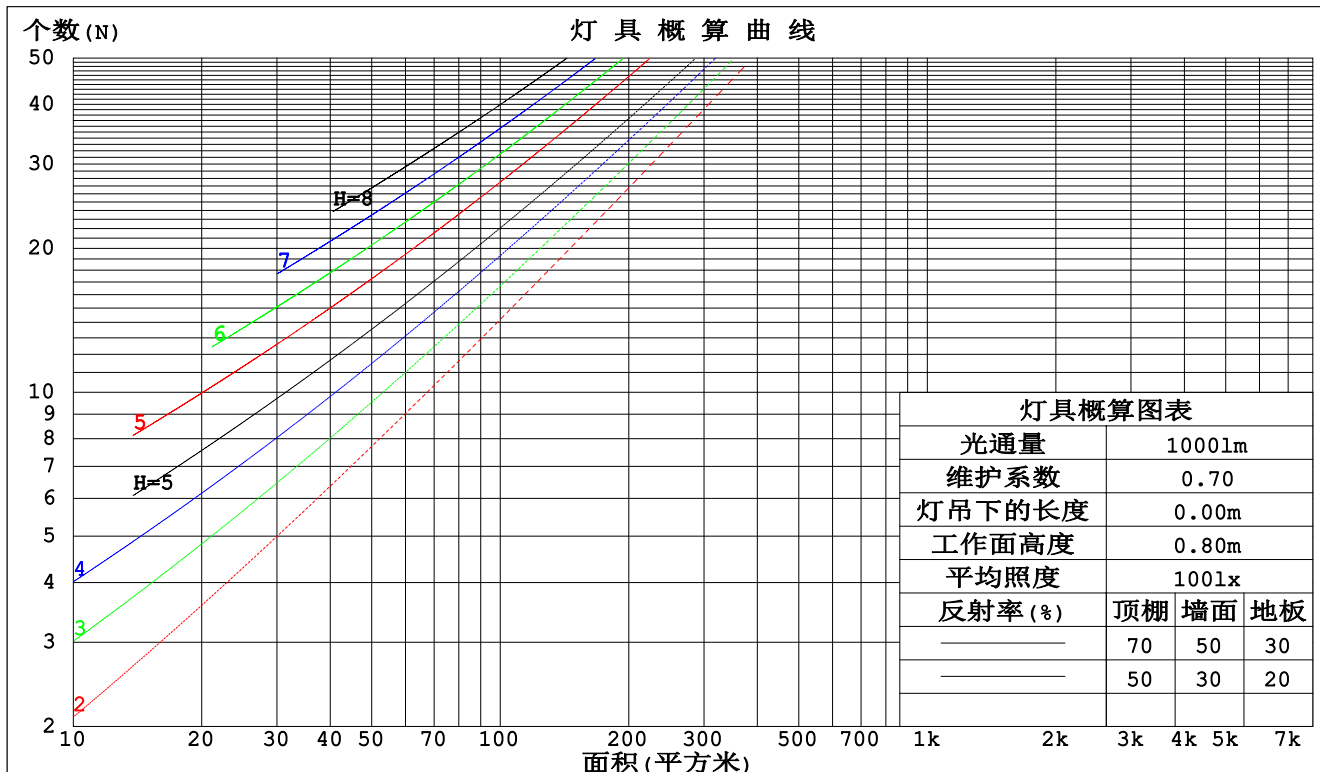

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: WJ
 测试日期: 2020-03-31

γ角度范围: 0度 - 180度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.366
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

墙面和天花板利用系数

实测参数: U:220.03V I:0.1594A P:34.014W PF:0.9696 Freq:50.00Hz 实检光通:3844.51x1 lm					
灯具名称: MZJ-LED-140P			灯具类型: LED 5700K		灯具重量: N/A
灯具规格: MZJ-LED-140P			外型尺寸: 1193*70*60mm		测试编号: 20
制造厂商: CL			发光口面: 1.185*0.07		遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.334	.190	.060	.325	.185	.059	.308	.176	.056	.292	.168	.054	.278	.161	.052	
2.0	.305	.167	.051	.297	.163	.050	.281	.156	.049	.267	.150	.047	.254	.144	.045	
3.0	.278	.148	.044	.271	.145	.044	.257	.139	.042	.245	.134	.041	.233	.129	.040	
4.0	.254	.132	.039	.248	.130	.038	.236	.125	.037	.224	.121	.036	.214	.116	.035	
5.0	.234	.119	.035	.228	.117	.034	.217	.113	.033	.207	.109	.032	.197	.105	.032	
6.0	.216	.108	.031	.211	.107	.031	.201	.103	.030	.192	.100	.029	.183	.096	.029	
7.0	.201	.099	.028	.196	.098	.028	.187	.094	.027	.178	.092	.027	.171	.089	.026	
8.0	.187	.091	.026	.183	.090	.025	.174	.087	.025	.167	.085	.024	.160	.082	.024	
9.0	.175	.085	.024	.171	.083	.023	.164	.081	.023	.157	.078	.022	.150	.076	.022	
10.0	.164	.079	.022	.161	.078	.022	.154	.075	.021	.147	.073	.021	.141	.071	.020	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.240	.240	.240	.205	.205	.205	.140	.140	.140	.080	.080	.080	.026	.026	.026	
1.0	.232	.206	.182	.198	.176	.157	.136	.121	.108	.078	.070	.063	.025	.023	.020	
2.0	.224	.182	.146	.192	.157	.127	.131	.108	.088	.076	.063	.052	.024	.020	.017	
3.0	.216	.165	.123	.185	.142	.107	.127	.099	.075	.074	.058	.044	.024	.019	.014	
4.0	.209	.152	.108	.179	.131	.094	.123	.091	.066	.071	.053	.039	.023	.017	.013	
5.0	.201	.141	.097	.173	.122	.085	.119	.085	.060	.069	.050	.035	.022	.016	.012	
6.0	.194	.133	.090	.167	.115	.078	.115	.081	.055	.067	.047	.033	.022	.016	.011	
7.0	.187	.126	.084	.161	.110	.073	.111	.077	.052	.065	.045	.031	.021	.015	.010	
8.0	.180	.121	.080	.155	.105	.069	.108	.073	.049	.063	.043	.029	.020	.014	.010	
9.0	.174	.116	.076	.150	.101	.067	.104	.071	.047	.061	.042	.028	.020	.014	.009	
10.0	.169	.112	.074	.145	.097	.064	.101	.068	.046	.059	.040	.027	.019	.013	.009	

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WJ
测试日期: 2020-03-31

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.366
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.03V I:0.1594A P:34.014W PF:0.9696 Freq:50.00Hz 实检光通:3844.51x1 lm										
灯具名称: MZJ-LED-140P					灯具类型: LED 5700K			灯具重量: N/A		
灯具规格: MZJ-LED-140P					外型尺寸: 1193*70*60mm			测试编号: 20		
制造厂商: CL					发光口面: 1.185*0.07			遮光角: N/A		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	22.0	23.5	22.4	23.8	24.2	21.3	22.8	21.7	23.1	23.4
3H	23.9	25.3	24.3	25.6	26.0	22.8	24.1	23.1	24.5	24.8
4H	24.9	26.1	25.3	26.5	26.9	23.3	24.6	23.7	24.9	25.3
6H	25.8	27.0	26.2	27.3	27.8	23.6	24.8	24.0	25.2	25.6
8H	26.2	27.4	26.7	27.8	28.2	23.7	24.8	24.1	25.2	25.7
12H	26.7	27.9	27.2	28.3	28.7	23.7	24.8	24.1	25.2	25.7
4H 2H	22.6	23.9	23.0	24.3	24.7	22.1	23.4	22.5	23.7	24.1
3H	24.8	25.9	25.2	26.3	26.7	23.7	24.9	24.2	25.3	25.7
4H	25.8	26.9	26.3	27.3	27.8	24.4	25.4	24.9	25.9	26.3
6H	26.9	27.8	27.4	28.3	28.8	24.9	25.8	25.4	26.2	26.8
8H	27.5	28.3	28.0	28.8	29.3	25.0	25.8	25.5	26.3	26.8
12H	28.1	28.9	28.6	29.4	29.9	25.0	25.8	25.6	26.3	26.9
8H 4H	26.1	27.0	26.6	27.4	28.0	24.9	25.7	25.4	26.2	26.7
6H	27.4	28.1	28.0	28.6	29.2	25.5	26.3	26.1	26.8	27.3
8H	28.1	28.8	28.7	29.3	29.9	25.8	26.4	26.3	26.9	27.5
12H	29.0	29.5	29.5	30.1	30.7	25.9	26.5	26.5	27.0	27.6
12H 4H	26.1	26.9	26.6	27.4	27.9	25.0	25.8	25.5	26.3	26.8
6H	27.5	28.1	28.0	28.7	29.2	25.7	26.4	26.3	26.9	27.5
8H	28.3	28.8	28.9	29.4	30.0	26.1	26.6	26.6	27.2	27.8
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

依据CIE Pub.117计算, 3845lm光源光通, 表格已经进行修正 ($8\log(F/F_0) = 4.7$)。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WJ
测试日期: 2020-03-31

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.366
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:220.03V I:0.1594A P:34.014W PF:0.9696 Freq:50.00Hz 实检光通:3844.51x1 lm		
灯具名称: MZJ-LED-140P	灯具类型: LED 5700K	灯具重量: N/A
灯具规格: MZJ-LED-140P	外型尺寸: 1193*70*60mm	测试编号: 20
制造厂商: CL	发光口面: 1.185*0.07	遮光角: N/A


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	54	42	35	53	42	35	52	41	35	28
0.80	64	52	44	63	51	44	61	50	43	36
1.00	72	60	53	71	60	52	68	61	52	44
1.25	79	68	60	77	67	60	74	65	59	51
1.50	84	74	66	82	72	65	78	70	64	55
2.00	91	82	75	89	80	74	85	77	72	63
2.50	95	87	80	93	85	79	88	82	76	67
3.00	99	91	85	96	89	84	91	85	81	70
4.00	103	97	91	100	94	90	95	90	86	75
5.00	106	100	95	103	98	93	97	93	90	78
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: WJ
 测试日期: 2020-03-31

γ角度范围: 0度 - 180度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.366
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

灯具等光强曲线

实测参数: U:220.03V I:0.1594A P:34.014W PF:0.9696 Freq:50.00Hz 实检光通:3844.51x1 lm		
灯具名称: MZJ-LED-140P	灯具类型: LED 5700K	灯具重量: N/A
灯具规格: MZJ-LED-140P	外型尺寸: 1193*70*60mm	测试编号: 20
制造厂商: CL	发光口面: 1.185*0.07	遮光角: N/A

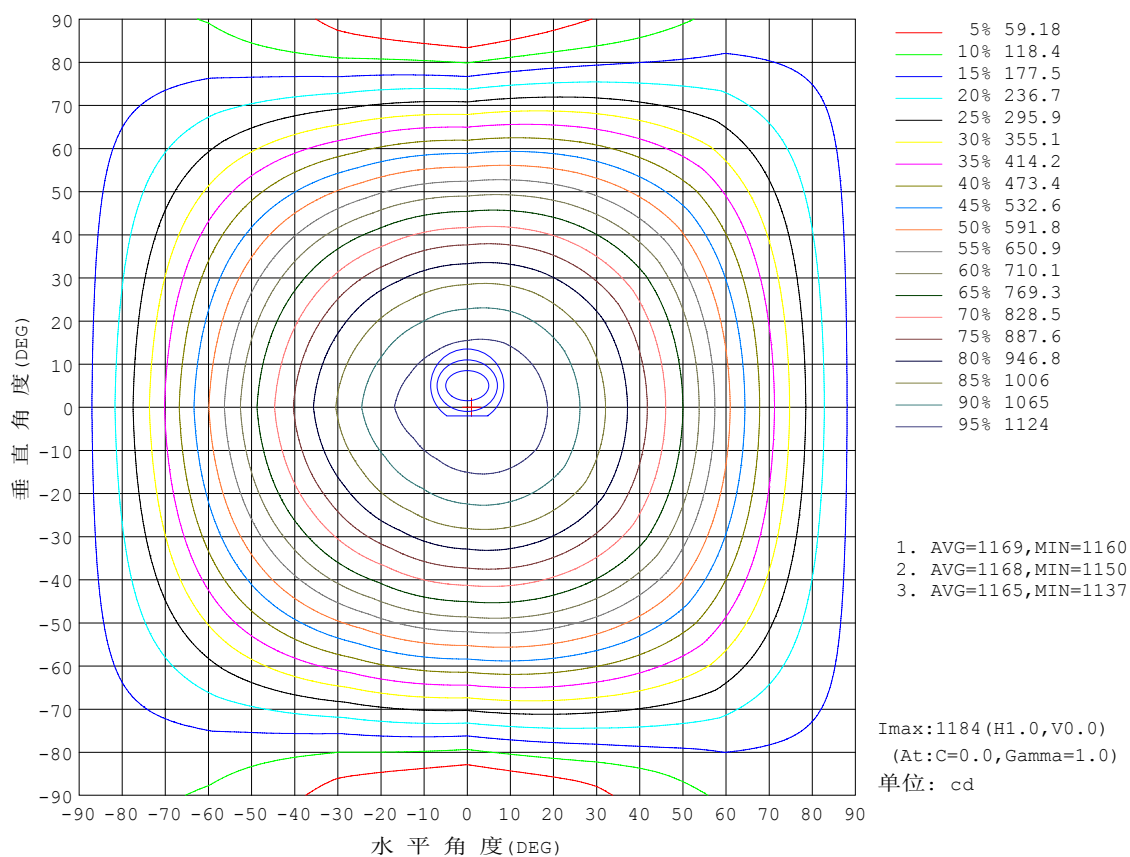


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WJ
测试日期: 2020-03-31

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.366
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:220.03V I:0.1594A P:34.014W PF:0.9696 Freq:50.00Hz 实检光通:3844.51x1 lm		
灯具名称: MZJ-LED-140P	灯具类型: LED 5700K	灯具重量: N/A
灯具规格: MZJ-LED-140P	外型尺寸: 1193*70*60mm	测试编号: 20
制造厂商: CL	发光口面: 1.185*0.07	遮光角: N/A

光通输出: 2480 lm

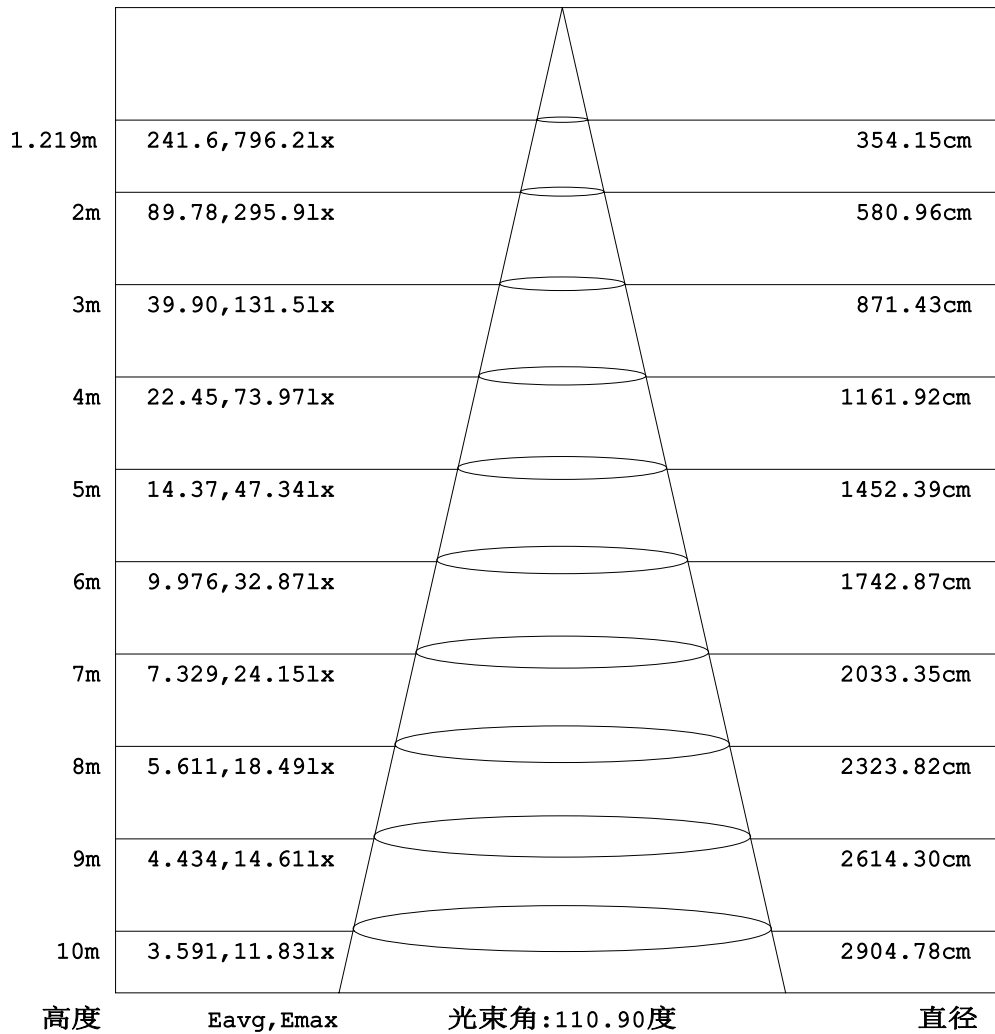


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: WJ
 测试日期: 2020-03-31

γ角度范围: 0度 - 180度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.366
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

平面等照度曲线

实测参数: U:220.03V I:0.1594A P:34.014W PF:0.9696 Freq:50.00Hz 实检光通:3844.51x1 lm		
灯具名称: MZJ-LED-140P	灯具类型: LED 5700K	灯具重量: N/A
灯具规格: MZJ-LED-140P	外型尺寸: 1193*70*60mm	测试编号: 20
制造厂商: CL	发光口面: 1.185*0.07	遮光角: N/A

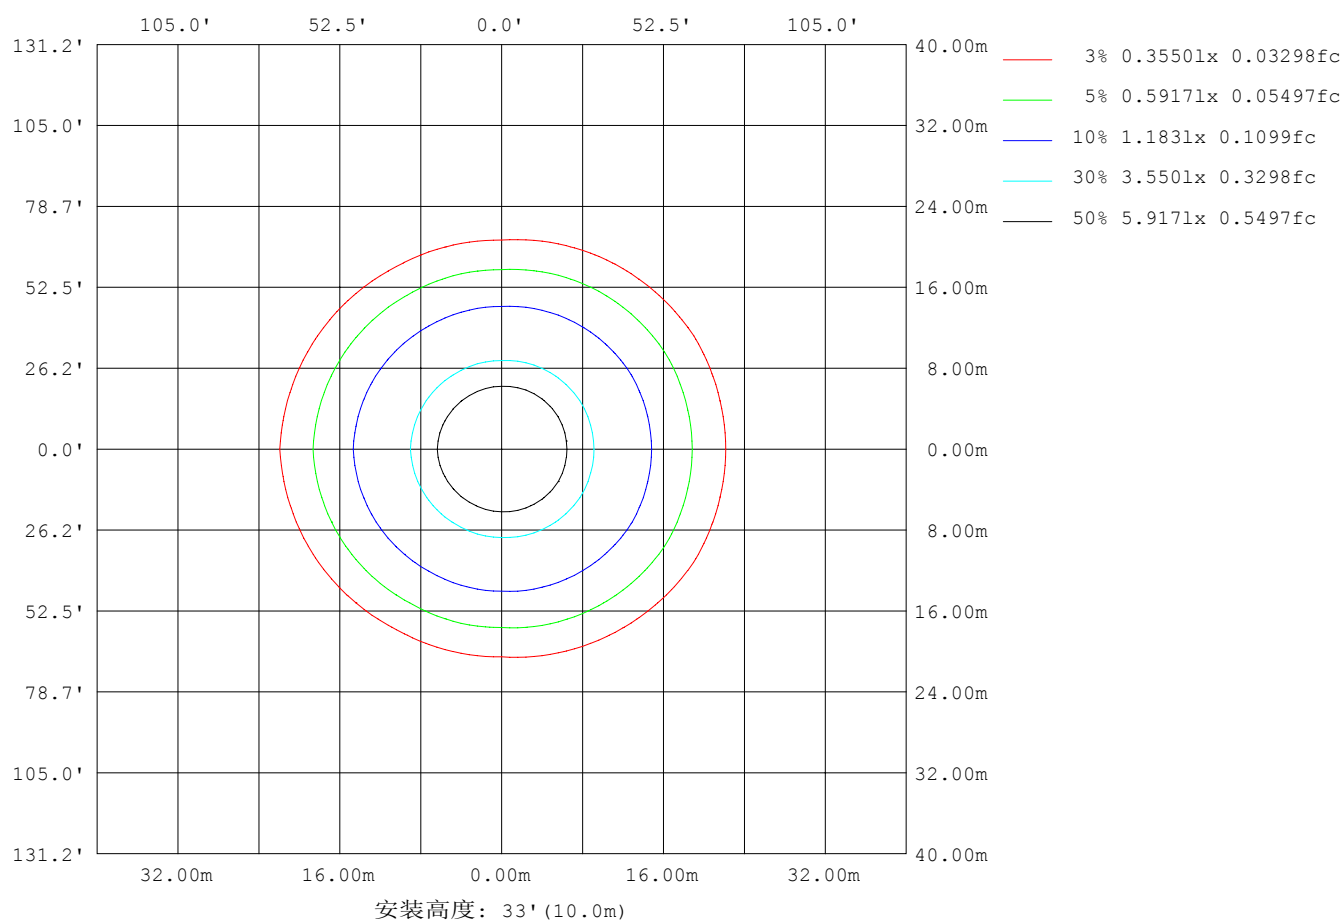

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WJ
测试日期: 2020-03-31

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.366
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.03V I:0.1594A P:34.014W PF:0.9696 Freq:50.00Hz 实检光通:3844.51x1 lm		
灯具名称: MZJ-LED-140P	灯具类型: LED 5700K	灯具重量: N/A
灯具规格: MZJ-LED-140P	外型尺寸: 1193*70*60mm	测试编号: 20
制造厂商: CL	发光口面: 1.185*0.07	遮光角: N/A


平均亮度	数值(cd/m2)
L横(65)av	14640
L横(75)av	15955
L横(85)av	28214
L纵(65)av	11637
L纵(75)av	9598
L纵(85)av	4656
L45(65)av	13283
L45(75)av	13181
L45(85)av	18058

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: WJ
 测试日期: 2020-03-31

γ角度范围: 0度 - 180度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.366
 环境湿度: 65.0%
 测试距离: 9.490米 [K=1.0000]
 备注:

平面照度曲线

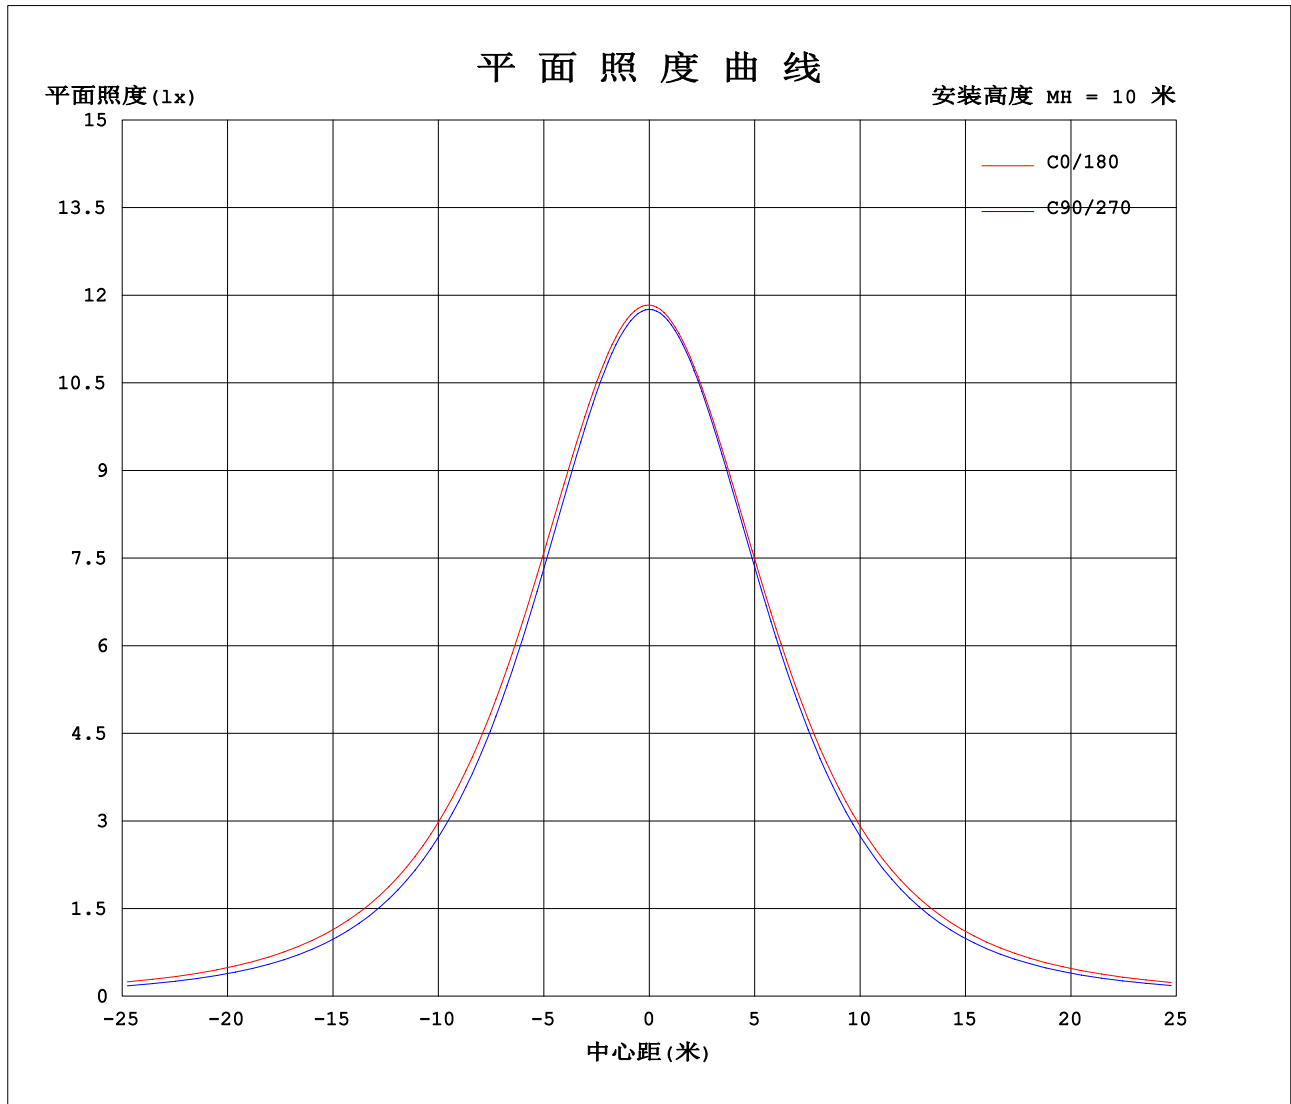

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WJ
测试日期: 2020-03-31

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.366
环境湿度: 65.0%
测试距离: 9.490米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:220.03V I:0.1594A P:34.014W PF:0.9696 Freq:50.00Hz 实检光通:3844.51x1 lm		
灯具名称: MZJ-LED-140P	灯具类型: LED 5700K	灯具重量: N/A
灯具规格: MZJ-LED-140P	外型尺寸: 1193*70*60mm	测试编号: 20
制造厂商: CL	发光口面: 1.185*0.07	遮光角: N/A

表--1

单位: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1183	1181	1178	1176	1175	1175	1183	1181	1178	1176	1175	1175						
5	1180	1179	1175	1170	1166	1166	1177	1172	1170	1171	1173	1174						
10	1168	1167	1161	1153	1147	1148	1161	1154	1152	1154	1160	1162						
15	1146	1146	1136	1125	1117	1120	1136	1126	1123	1127	1137	1142						
20	1115	1115	1102	1087	1078	1083	1103	1090	1085	1090	1104	1111						
25	1075	1076	1058	1040	1030	1039	1060	1046	1038	1043	1061	1073						
30	1028	1028	1006	984	974	987	1011	994	983	988	1010	1025						
35	973	973	946	920	911	928	955	934	920	924	950	970						
40	911	910	878	848	841	862	892	869	851	853	884	908						
45	843	842	805	770	765	791	824	797	775	776	811	839						
50	769	767	725	686	684	715	751	721	694	692	732	765						
55	690	687	640	596	597	634	672	640	609	604	648	686						
60	608	602	550	502	506	549	590	555	519	510	560	602						
65	522	515	456	403	413	461	505	467	426	413	468	516						
70	435	424	359	302	316	372	417	378	331	312	373	427						
75	351	334	263	201	223	286	334	294	237	211	279	340						
80	274	249	172	107	138	209	259	217	151	115	189	259						
85	210	177	91.9	31.1	72.7	150	198	156	82.9	36.2	113	190						
90	161	130	49.3	0.82	42.0	111	152	115	47.6	1.00	61.3	137						
95	127	99.4	38.6	1.26	32.1	86.5	120	89.8	35.0	1.49	39.6	103						
100	105	84.2	34.2	1.92	30.0	74.4	100	76.2	30.0	2.20	33.3	83.7						
105	92.5	74.8	31.5	2.70	27.0	67.3	88.2	66.9	27.1	2.90	30.3	73.7						
110	84.3	69.4	29.4	3.56	24.8	61.5	78.6	60.4	25.1	3.73	28.7	66.2						
115	77.4	63.7	25.6	4.55	23.4	56.0	66.4	55.3	24.2	4.61	24.6	61.4						
120	71.0	58.3	22.6	5.63	22.1	50.5	62.7	50.9	23.3	5.60	22.4	57.1						
125	64.8	53.6	19.4	6.68	21.2	46.2	57.8	46.6	22.3	6.57	21.4	52.0						
130	59.0	44.6	17.8	7.65	20.0	42.4	50.9	42.6	21.4	7.51	20.1	42.4						
135	53.4	37.3	17.1	8.50	19.2	38.4	46.4	38.6	20.4	8.36	18.9	37.3						
140	48.0	30.5	16.9	9.57	18.5	34.4	41.9	34.8	19.4	9.29	17.9	31.5						
145	42.6	26.2	16.4	10.8	17.5	30.3	36.9	30.3	17.9	10.7	17.1	27.9						
150	37.3	23.6	16.8	12.1	16.3	27.0	32.3	23.9	16.6	12.0	17.1	24.4						
155	32.8	20.4	16.8	13.3	14.9	23.7	27.9	23.6	15.4	13.2	16.9	21.3						
160	28.5	18.0	16.3	14.4	13.6	20.0	23.4	20.3	13.9	14.3	16.7	18.4						
165	23.9	16.1	15.1	15.4	12.8	17.0	19.6	17.2	12.6	15.3	15.5	16.7						
170	20.9	14.5	15.5	16.1	16.7	13.9	15.5	14.2	16.5	16.1	15.6	15.7						
175	11.8	14.1	14.9	16.7	17.5	16.7	10.9	16.6	17.5	16.7	15.2	14.2						
180	12.1	16.3	16.9	17.1	17.1	16.6	12.1	16.3	16.9	17.1	17.1	16.5						

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: WJ

测试日期: 2020-03-31

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.366

环境湿度: 65.0%

测试距离: 9.490米 [K=1.0000]

备注: