

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
 环境湿度: 65.0%
 测试距离: 9.420米 [K=1.0000]
 备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
10	1184	1164	1154	1161	1215	1217	1210	1189	0- 10	119.3	119.3	12.5, 12.5
20	873.7	852.2	844.1	859.2	910.4	919.7	918.7	892.7	10- 20	290.3	409.6	43.1, 43.1
30	481.9	453.3	450.2	475.6	534.1	547.7	555.2	531.7	20- 30	314.8	724.3	76.1, 76.1
40	78.71	70.43	67.01	68.43	79.34	89.81	93.17	88.20	30- 40	156.3	880.7	92.6, 92.6
50	24.40	23.06	22.60	22.83	24.38	25.30	25.51	25.55	40- 50	32.74	913.4	96, 96
60	15.21	15.66	14.24	15.24	14.50	16.42	15.48	16.53	50- 60	17.36	930.8	97.9, 97.9
70	7.849	9.287	5.760	8.123	5.893	9.835	8.681	10.58	60- 70	12.33	943.1	99.1, 99.1
80	1.127	1.103	0.9798	0.9046	0.8592	1.006	1.058	1.160	70- 80	3.465	946.6	99.5, 99.5
90	0.0168	0	0	0	0	0	0.0379	0.0778	80- 90	0.5738	947.1	99.6, 99.6
100	0	0	0	0	0.0262	0	0	0	90-100	0.0015	947.1	99.6, 99.6
110	0	0.0026	0.0001	0.0052	0.0834	0.0001	0	0	100-110	0.0048	947.1	99.6, 99.6
120	0.0467	0.0728	0.0887	0.0807	0.1252	0.0730	0	0.0545	110-120	0.0232	947.2	99.6, 99.6
130	0.3434	0.4118	0.4488	0.4012	0.4126	0.3494	0.3124	0.3623	120-130	0.1666	947.3	99.6, 99.6
140	1.077	1.131	1.158	1.097	1.211	1.103	1.057	1.144	130-140	0.5491	947.9	99.7, 99.7
150	1.913	1.986	1.997	1.918	2.170	1.986	1.934	2.104	140-150	0.9713	948.8	99.8, 99.8
160	2.689	2.781	2.977	2.689	2.899	2.776	2.908	2.919	150-160	1.114	950.0	99.9, 99.9
170	3.487	3.565	3.556	3.427	3.498	3.456	3.440	3.526	160-170	0.8909	950.9	100, 100
180	3.790	3.777	3.717	3.732	3.842	3.782	3.670	3.717	170-180	0.3451	951.2	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 901.39 lm

%lum = 94.8%

%lamp = 94.8%

锥面光通量(120度): 930.77 lm

%lum = 97.9%

%lamp = 97.9%

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: WEIJIE
 测试日期: 2022-12-29


γ 角度范围: 0度 - 180度
 γ 角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
 环境湿度: 65.0%
 测试距离: 9.420米 [K=1.0000]
 备注:

灯具亮度限制曲线

实测参数: U:220.03V I:0.0911A P:10.842W PF:0.5406 Freq:50.00Hz 实检光通: 951.199x1 lm		
灯具名称: MQT-LED0408-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0408-P3	外型尺寸: 120*120*62MM	测试编号: 1
制造厂商:	发光口面: 0.038	遮光角: N/A

有光侧边灯具的亮度限制曲线

眩光等级	质量等级	使用照度 (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

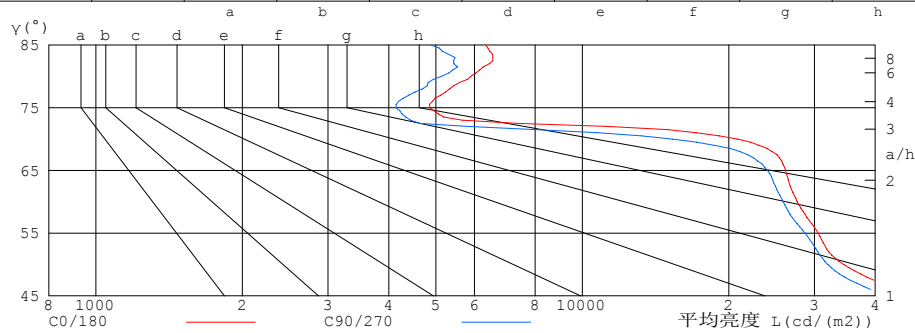

平均亮度值 cd/(m2)		
γ(°)	C0/180	C90/270
85	6325	4880
80	5899	5129
75	4858	4136
70	20863	15310
65	26185	24008
60	27651	25883
55	30551	28683
50	34503	31967
45	49226	42340


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:220.03V I:0.0911A P:10.842W PF:0.5406 Freq:50.00Hz 实检光通: 951.199x1 lm		
灯具名称: MQT-LED0408-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0408-P3	外型尺寸: 120*120*62MM	测试编号: 1
制造厂商:	发光口面: 0.038	遮光角: N/A

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.93	.95	.93	.91	.92	.90	.89	.87
3.0	.96	.92	.88	.95	.90	.87	.92	.89	.85	.90	.87	.84	.88	.85	.83	.81
4.0	.90	.85	.81	.89	.84	.80	.87	.83	.79	.85	.81	.78	.83	.80	.77	.76
5.0	.85	.79	.75	.84	.79	.75	.82	.78	.74	.80	.76	.73	.79	.75	.73	.71
6.0	.80	.74	.70	.79	.74	.70	.78	.73	.69	.76	.72	.69	.75	.71	.68	.67
7.0	.76	.70	.66	.75	.69	.65	.74	.69	.65	.72	.68	.65	.71	.67	.64	.63
8.0	.71	.66	.62	.71	.65	.62	.70	.65	.61	.69	.64	.61	.68	.64	.61	.59
9.0	.68	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.58	.65	.60	.57	.56
10.0	.64	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.62	.57	.54	.53

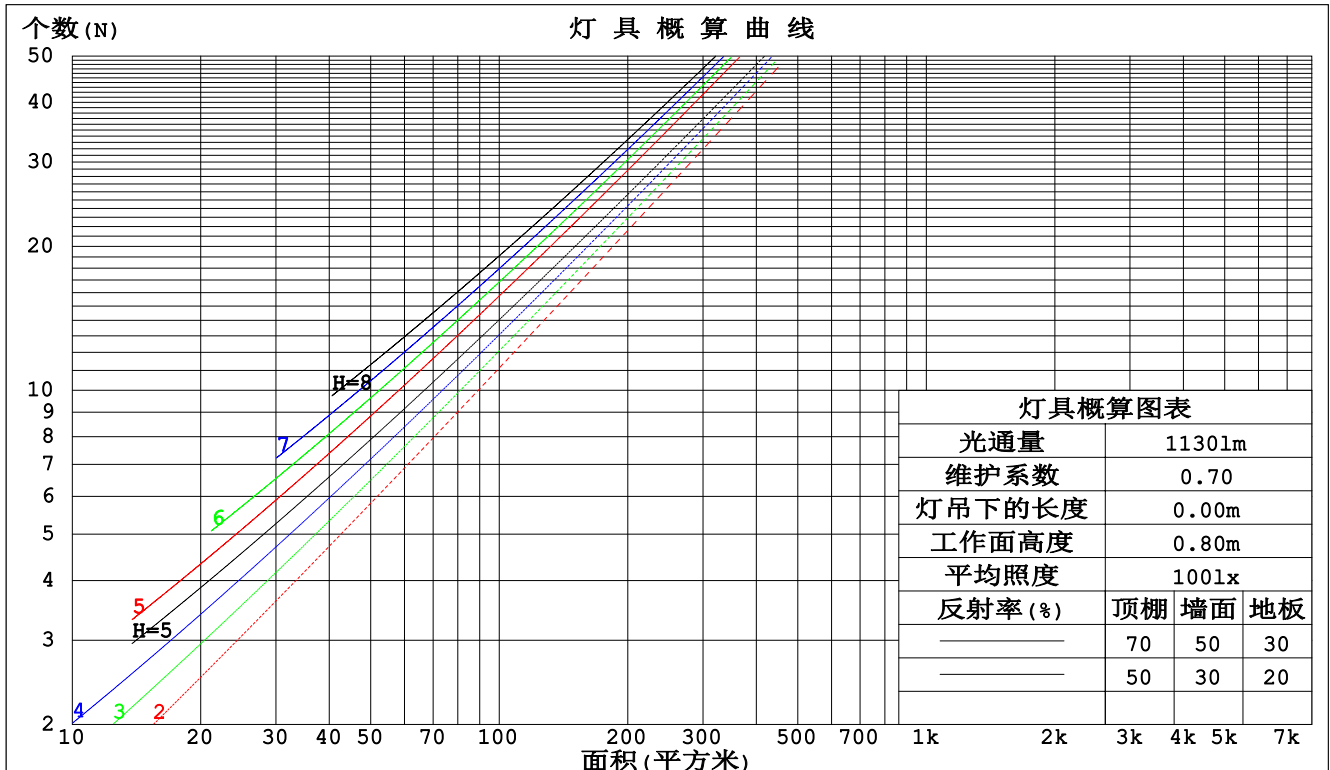

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:220.03V I:0.0911A P:10.842W PF:0.5406 Freq:50.00Hz 实检光通: 951.199x1 lm					
灯具名称: MQT-LED0408-P3		灯具类型: LED 4000K		灯具重量: N/A	
灯具规格: MQT-LED0408-P3		外型尺寸: 120*120*62MM		测试编号: 1	
制造厂商:		发光口面: 0.038		遮光角: N/A	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.177	.101	.032	.170	.097	.031	.157	.090	.029	.145	.084	.027	.135	.078	.025	
2.0	.169	.093	.028	.163	.090	.028	.152	.085	.026	.142	.080	.025	.133	.075	.024	
3.0	.160	.085	.026	.155	.083	.025	.146	.079	.024	.137	.075	.023	.130	.072	.022	
4.0	.152	.079	.023	.148	.077	.023	.140	.074	.022	.132	.071	.021	.126	.068	.021	
5.0	.144	.074	.021	.141	.072	.021	.134	.070	.021	.127	.067	.020	.121	.065	.019	
6.0	.138	.069	.020	.134	.068	.020	.128	.066	.019	.123	.064	.019	.117	.062	.018	
7.0	.131	.065	.018	.128	.064	.018	.123	.062	.018	.118	.060	.018	.113	.059	.017	
8.0	.125	.061	.017	.123	.061	.017	.118	.059	.017	.114	.058	.017	.109	.056	.016	
9.0	.120	.058	.016	.118	.057	.016	.113	.056	.016	.109	.055	.016	.106	.054	.015	
10.0	.115	.055	.015	.113	.055	.015	.109	.053	.015	.105	.052	.015	.102	.051	.015	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.174	.161	.148	.149	.138	.128	.102	.095	.088	.059	.055	.051	.019	.018	.017	
2.0	.159	.136	.116	.136	.117	.100	.093	.081	.070	.054	.047	.041	.017	.015	.013	
3.0	.147	.117	.093	.126	.101	.081	.086	.070	.057	.050	.041	.033	.016	.013	.011	
4.0	.136	.102	.076	.117	.088	.066	.080	.062	.047	.047	.036	.028	.015	.012	.009	
5.0	.127	.091	.063	.109	.078	.055	.075	.055	.039	.044	.032	.023	.014	.010	.008	
6.0	.120	.081	.053	.103	.070	.047	.071	.049	.033	.041	.029	.020	.013	.009	.006	
7.0	.113	.074	.046	.097	.064	.040	.067	.045	.028	.039	.026	.017	.013	.009	.006	
8.0	.107	.067	.040	.093	.058	.035	.064	.041	.025	.037	.024	.015	.012	.008	.005	
9.0	.102	.062	.035	.088	.054	.030	.061	.038	.022	.036	.022	.013	.012	.007	.004	
10.0	.098	.058	.031	.084	.050	.027	.058	.035	.019	.034	.021	.011	.011	.007	.004	

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.03V I:0.0911A P:10.842W PF:0.5406 Freq:50.00Hz 实检光通: 951.199x1 lm										
灯具名称: MQT-LED0408-P3					灯具类型: LED 4000K			灯具重量: N/A		
灯具规格: MQT-LED0408-P3					外型尺寸: 120*120*62MM			测试编号: 1		
制造厂商:					发光口面: 0.038			遮光角: N/A		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	22.2	23.1	22.4	23.3	23.4	21.5	22.5	21.8	22.6	22.8
3H	22.4	23.2	22.7	23.5	23.7	21.7	22.6	22.0	22.8	23.0
4H	22.3	23.1	22.6	23.4	23.6	21.7	22.5	21.9	22.7	22.9
6H	22.3	23.0	22.6	23.3	23.5	21.6	22.3	21.9	22.6	22.8
8H	22.2	23.0	22.5	23.2	23.5	21.5	22.3	21.9	22.5	22.8
12H	22.2	22.9	22.5	23.2	23.4	21.5	22.2	21.8	22.5	22.8
4H 2H	22.1	22.9	22.4	23.2	23.4	21.6	22.4	21.8	22.6	22.8
3H	22.5	23.2	22.8	23.5	23.8	21.9	22.6	22.2	22.8	23.1
4H	22.5	23.1	22.8	23.4	23.7	21.8	22.4	22.2	22.7	23.1
6H	22.4	22.9	22.8	23.3	23.6	21.7	22.3	22.1	22.6	23.0
8H	22.4	22.9	22.8	23.2	23.6	21.7	22.2	22.1	22.6	22.9
12H	22.3	22.8	22.7	23.2	23.6	21.6	22.1	22.1	22.5	22.9
8H 4H	22.4	22.9	22.8	23.2	23.6	21.7	22.2	22.1	22.6	23.0
6H	22.3	22.7	22.7	23.1	23.5	21.7	22.1	22.1	22.5	22.9
8H	22.3	22.6	22.7	23.1	23.5	21.6	22.0	22.1	22.4	22.9
12H	22.2	22.5	22.7	23.0	23.5	21.6	21.9	22.1	22.4	22.8
12H 4H	22.3	22.8	22.7	23.2	23.6	21.7	22.1	22.1	22.5	22.9
6H	22.2	22.6	22.7	23.0	23.5	21.6	22.0	22.1	22.4	22.9
8H	22.2	22.5	22.7	23.0	23.5	21.6	21.9	22.1	22.3	22.8
不同间隔布灯时, 观察者位置引起的UGR变化 (CIE Pub.117):										
S = 1.0H	+ 2.4 / - 2.1					+ 1.9 / - 1.9				
1.5H	+ 4.2 / - 1.9					+ 3.5 / - 1.7				
2.0H	+ 1.5 / - 0.8					+ 0.8 / - 0.9				

依据CIE Pub.117计算, 951.21lm光源光通, 表格已经进行修正 ($81\log(F/F_0) = -0.2$)。
出光口面积: 0.0011 m²

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:220.03V I:0.0911A P:10.842W PF:0.5406 Freq:50.00Hz 实检光通: 951.199x1 lm		
灯具名称: MQT-LED0408-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0408-P3	外型尺寸: 120*120*62MM	测试编号: 1
制造厂商:	发光口面: 0.038	遮光角: N/A


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	86	80	77	86	80	77	73
0.80	94	88	85	94	88	85	92	87	84	80
1.00	99	93	89	98	93	89	96	92	89	85
1.25	103	97	94	102	97	94	100	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	95
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
 C角度间隔: 30.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: WEIJIE
 测试日期: 2022-12-29

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
 环境湿度: 65.0%
 测试距离: 9.420米 [K=1.0000]
 备注:

灯具等光强曲线

实测参数: U:220.03V I:0.0911A P:10.842W PF:0.5406 Freq:50.00Hz 实检光通: 951.199x1 lm		
灯具名称: MQT-LED0408-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0408-P3	外型尺寸: 120*120*62MM	测试编号: 1
制造厂商:	发光口面: 0.038	遮光角: N/A

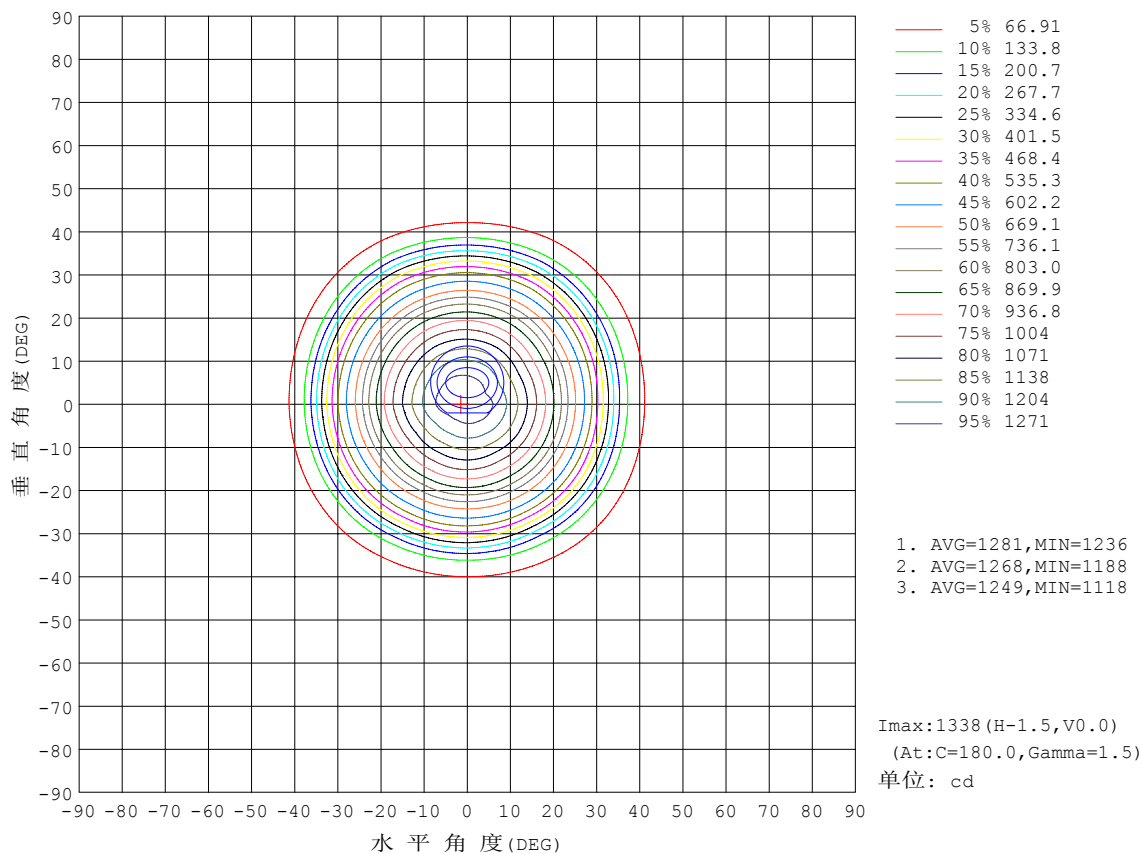


C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

灯具有效平均照度图

实测参数: U:220.03V I:0.0911A P:10.842W PF:0.5406 Freq:50.00Hz 实检光通: 951.199x1 lm		
灯具名称: MQT-LED0408-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0408-P3	外型尺寸: 120*120*62MM	测试编号: 1
制造厂商:	发光口面: 0.038	遮光角: N/A

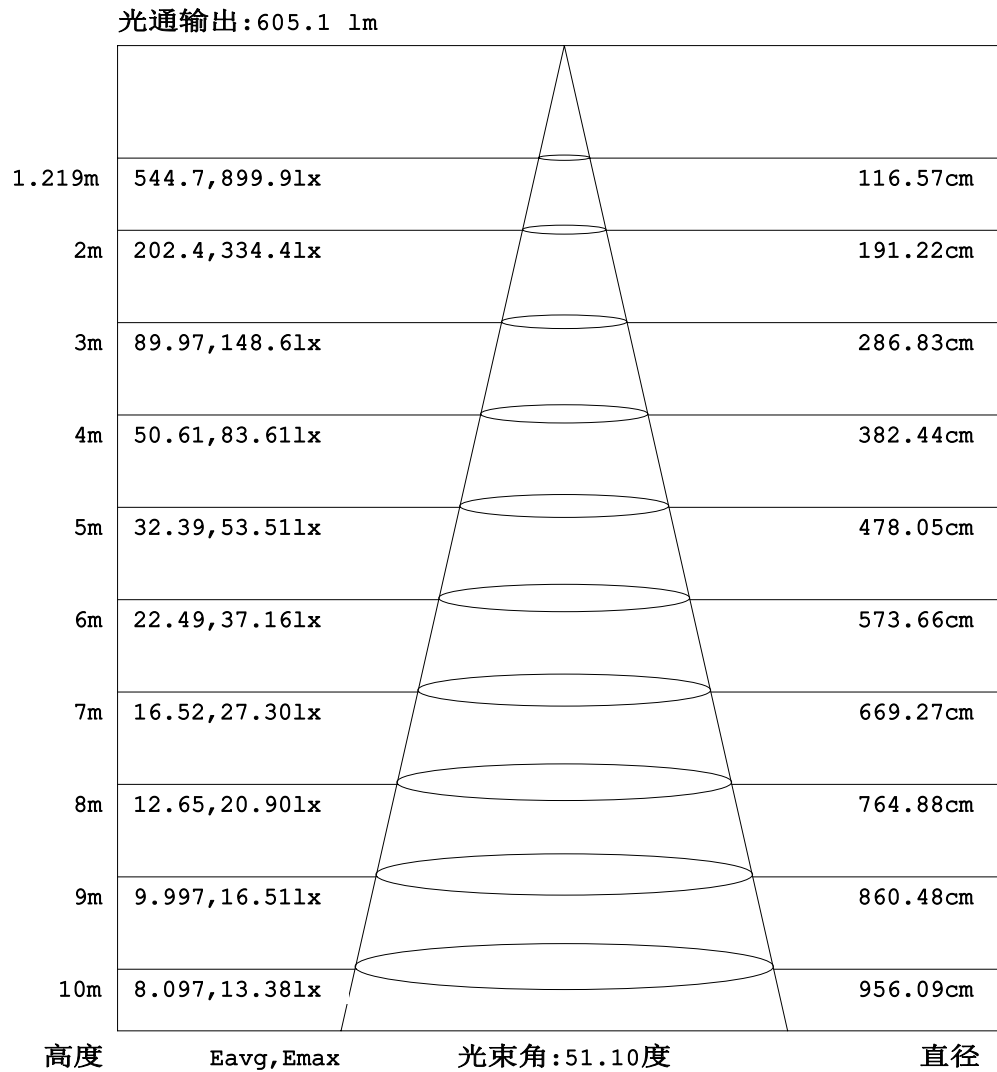


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:220.03V I:0.0911A P:10.842W PF:0.5406 Freq:50.00Hz 实检光通: 951.199x1 lm		
灯具名称: MQT-LED0408-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0408-P3	外型尺寸: 120*120*62MM	测试编号: 1
制造厂商:	发光口面: 0.038	遮光角: N/A

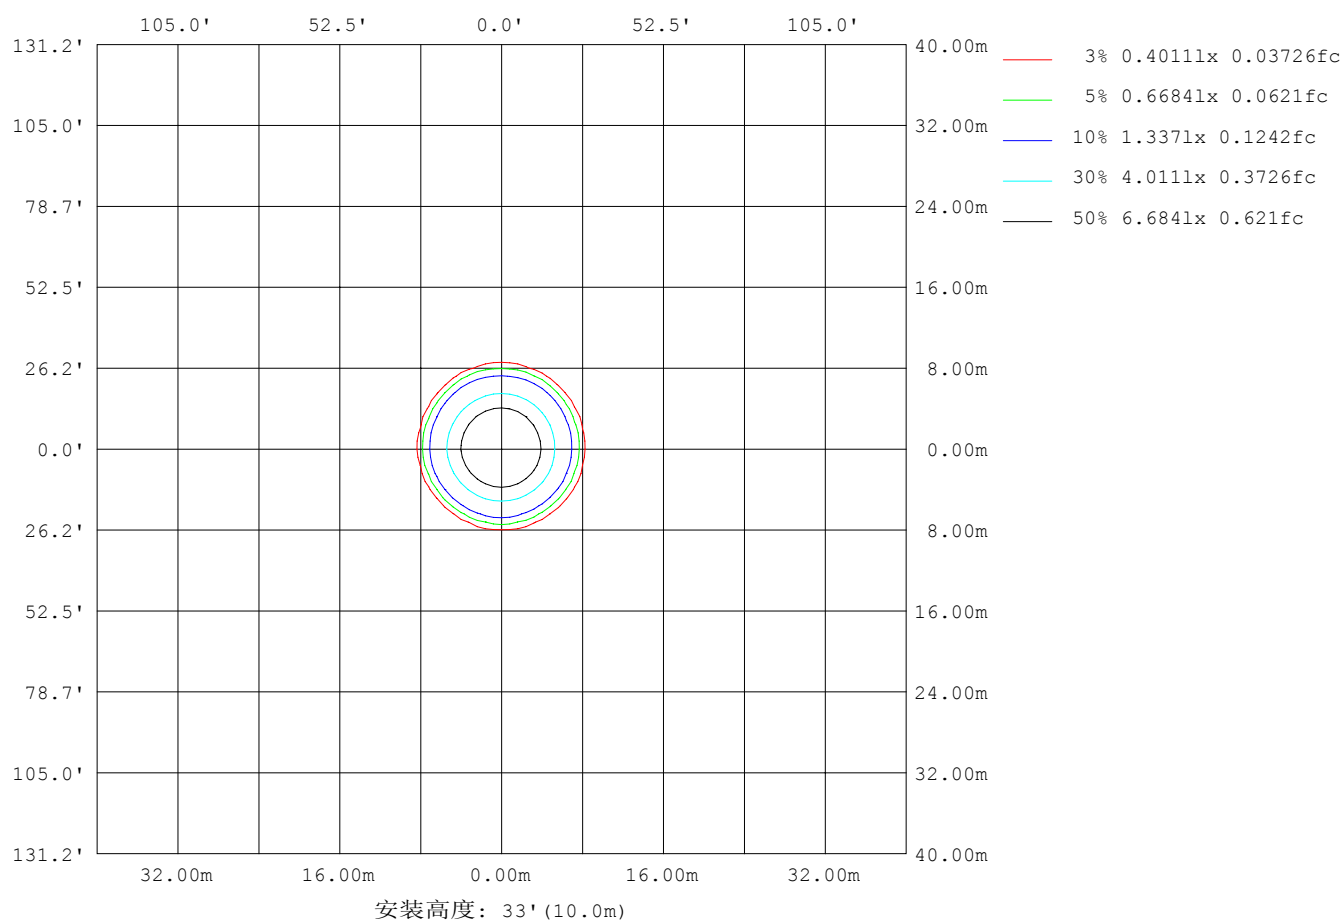

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.03V I:0.0911A P:10.842W PF:0.5406 Freq:50.00Hz 实检光通: 951.199x1 lm		
灯具名称: MQT-LED0408-P3	灯具类型:LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0408-P3	外型尺寸: 120*120*62MM	测试编号: 1
制造厂商:	发光口面: 0.038	遮光角: N/A


平均亮度	数值(cd/m2)
L横(65)av	25314
L横(75)av	4305
L横(85)av	4732
L纵(65)av	25067
L纵(75)av	4562
L纵(85)av	6252
L45(65)av	28421
L45(75)av	10269
L45(85)av	5737

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度:25.3℃
测试人员:WEIJIE
测试日期:2022-12-29

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.00.446
环境湿度:65.0%
测试距离:9.420米 [K=1.0000]
备注:

平面照度曲线

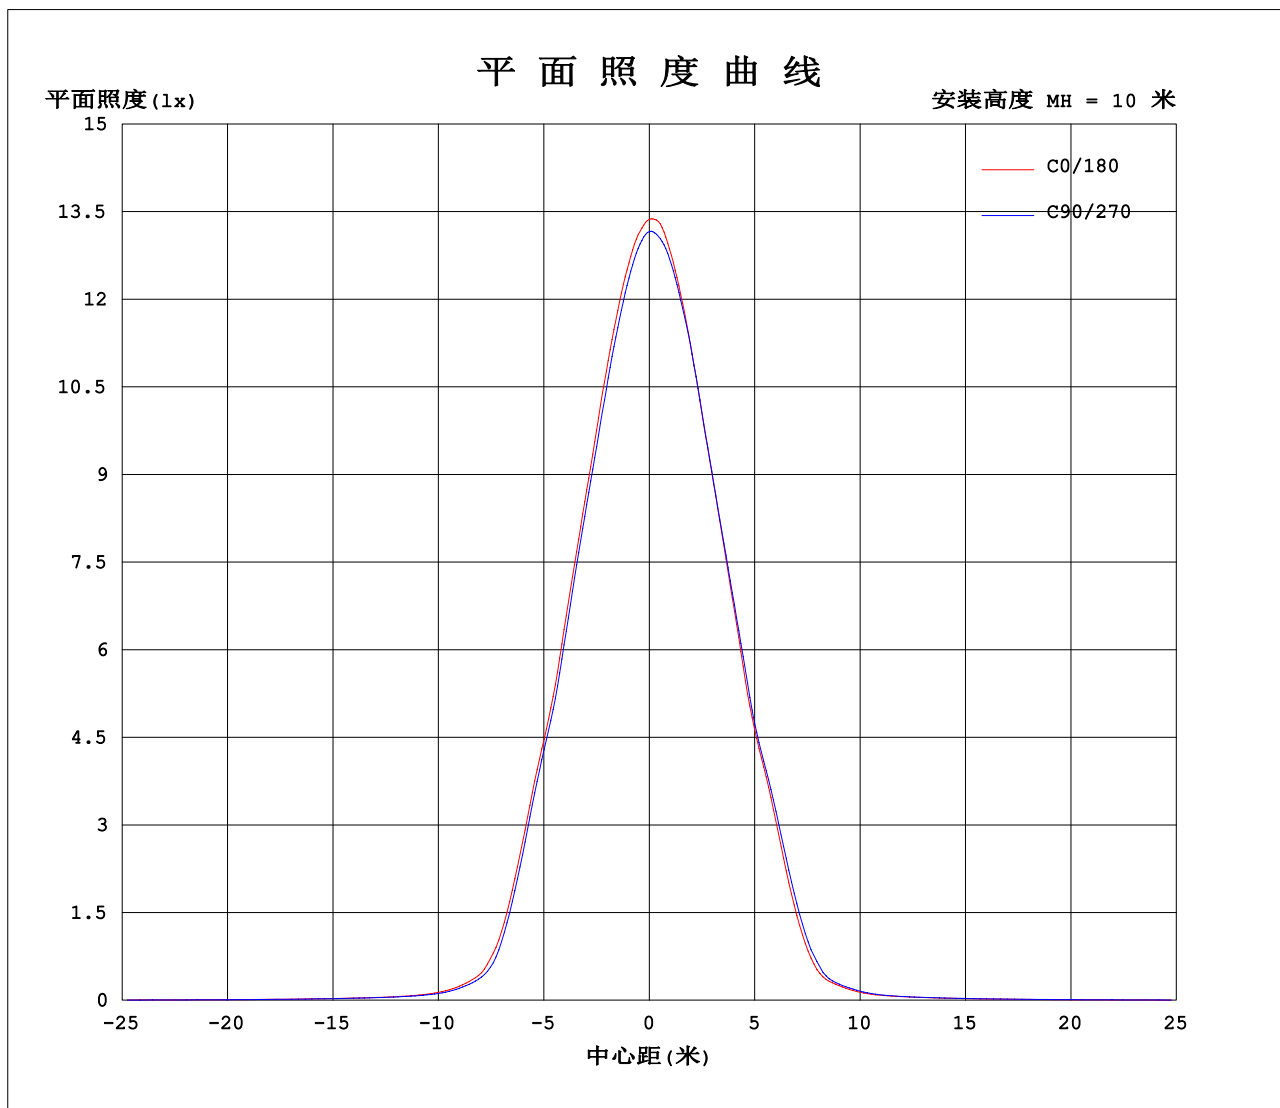

C角度范围: 0度 - 360度
C角度间隔: 30.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: WEIJIE
测试日期: 2022-12-29

Y角度范围: 0度 - 180度
Y角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446
环境湿度: 65.0%
测试距离: 9.420米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:220.03V I:0.0911A P:10.842W PF:0.5406 Freq:50.00Hz 实检光通: 951.199x1 lm		
灯具名称: MQT-LED0408-P3	灯具类型: LED 4000K	灯具重量: N/A
灯具规格: MQT-LED0408-P3	外型尺寸: 120*120*62MM	测试编号: 1
制造厂商:	发光口面: 0.038	遮光角: N/A

表--1

单位: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1337	1328	1321	1316	1311	1307	1337	1328	1321	1316	1311	1307						
5	1288	1278	1266	1263	1260	1271	1311	1307	1304	1293	1285	1270						
10	1184	1173	1155	1154	1151	1170	1215	1215	1219	1210	1201	1177						
15	1038	1025	1006	1009	1009	1028	1071	1072	1078	1073	1063	1035						
20	874	861	844	844	849	869	910	917	923	919	905	880						
25	673	659	648	644	648	669	704	716	730	729	717	686						
30	482	468	439	450	456	495	534	541	555	555	550	514						
35	215	201	174	183	184	221	263	281	311	300	292	250						
40	78.7	73.6	67.2	67.0	66.0	70.8	79.3	84.5	95.1	93.2	92.5	83.9						
45	38.3	36.1	33.1	32.9	32.2	34.4	39.0	41.0	44.8	44.4	45.3	41.2						
50	24.4	23.6	22.6	22.6	22.5	23.2	24.4	24.8	25.8	25.5	26.0	25.1						
55	19.3	19.0	18.6	18.1	18.6	18.9	19.0	20.0	20.4	20.0	20.2	19.6						
60	15.2	16.0	15.3	14.2	15.3	15.2	14.5	16.1	16.7	15.5	16.7	16.3						
65	12.2	13.5	12.6	11.2	12.4	12.2	11.4	13.0	13.5	12.1	13.7	13.5						
70	7.85	9.92	8.65	5.76	8.05	8.20	5.89	9.56	10.1	8.68	10.7	10.4						
75	1.38	2.82	1.59	1.18	1.39	1.33	1.07	2.01	3.44	1.42	5.07	4.26						
80	1.13	1.10	1.11	0.98	0.97	0.84	0.86	0.96	1.05	1.06	1.14	1.18						
85	0.61	0.56	0.56	0.47	0.41	0.31	0.30	0.46	0.62	0.73	0.75	0.71						
90	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.08	0.07						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.01	0.00	0.00	0.00	0.01	0.08	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.03	0.00	0.02	0.00	0.04	0.09	0.00	0.02	0.00	0.02	0.00						
120	0.05	0.09	0.06	0.09	0.06	0.10	0.13	0.08	0.06	0.00	0.07	0.04						
125	0.15	0.20	0.17	0.21	0.17	0.18	0.19	0.13	0.17	0.10	0.17	0.14						
130	0.34	0.42	0.40	0.45	0.41	0.39	0.41	0.34	0.36	0.31	0.36	0.36						
135	0.67	0.75	0.74	0.76	0.74	0.73	0.74	0.72	0.67	0.60	0.67	0.70						
140	1.08	1.15	1.11	1.16	1.09	1.10	1.21	1.15	1.06	1.06	1.14	1.15						
145	1.48	1.55	1.56	1.59	1.51	1.48	1.71	1.59	1.48	1.54	1.65	1.63						
150	1.91	1.99	1.98	2.00	1.95	1.88	2.17	2.08	1.89	1.93	2.12	2.09						
155	2.30	2.48	2.43	2.54	2.37	2.32	2.57	2.49	2.32	2.41	2.58	2.55						
160	2.69	2.79	2.77	2.98	2.73	2.65	2.90	2.81	2.74	2.91	2.97	2.87						
165	3.09	3.18	3.15	3.34	3.11	3.05	3.23	3.22	3.10	3.32	3.43	3.11						
170	3.49	3.59	3.54	3.56	3.40	3.46	3.50	3.56	3.35	3.44	3.67	3.38						
175	3.74	3.74	3.76	3.74	3.60	3.69	3.69	3.76	3.61	3.53	3.77	3.59						
180	3.79	3.83	3.72	3.72	3.77	3.70	3.84	3.81	3.75	3.67	3.77	3.66						

C角度范围: 0度 - 360度

C角度间隔: 30.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: WEIJIE

测试日期: 2022-12-29

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.00.446

环境湿度: 65.0%

测试距离: 9.420米 [K=1.0000]

备注: